



CRC NEW ENERGY

# APPROVAL SHEET

TO: 交流滤波薄膜电容 6.6uF ± 10% 300VAC

Main Materials		MARKING & OUTLINE DRAWING
Construction	Materials	
Dielectric	Metallized Polypropylene Film	
Terminal	Tinned copper wire	
Filling	Flame-retardant epoxy resin, white	
Case	Flame-retardant plastic case, grey	

Part No.	TYPE	Dimensions (mm)						NOTE
		W	H	T	P	L	ΦD	
AC5019	MKP-AC6.6uFK300VAC	41.5	35	19	37.5	6	1.0CU	

CUSTOMER CONFIRMATION			CRC OFFER		
STAMP	APPROVED BY	CHECKED BY	STAMP	APPROVED BY	PREPARED BY
				张东泽	李道燕
DATE			DATE	2017-07-22	

## SHENZHEN CRC NEW ENERGY CO., LTD

6th and 7th Floor R&D Building, Yanchuan North Industrial Park,  
Songgang Town, Baoan District, Shenzhen, China

TEL: +86 - 0755 - 29948883 / 29948998 FAX: +86 - 0755 - 29948906 <http://www.crccapacitor.com>


CRC-BDE-08

## Technical Data


Items	Symbols	Values
Rated capacitance	$C_N$	$6.6\mu\text{F} \pm 10\%$
Rated voltage	$U_N$	300V.AC
Non-recurrent surge voltage	$U_s$	450V.AC
Maximum current	$I_{rms}$	10A
Maximum peak current	$\hat{I}$	270A
Maximum surge current	$I_s$	810A
Series resistance	$R_s$	$\leq 6\text{m}\Omega$
Tangent of the loss	$\tan \delta$	$\leq 0.0020(100\text{Hz})$
Insulation Resistance	$C \times R_{is}$	$\geq 5000\text{S}$
Self inductance	$L_e$	$\leq 30\text{nH}$
Lowest operating temperature	$\Theta_{min}$	$-40^\circ\text{C}$
Maximum operating temperature	$\Theta_{max}$	$105^\circ\text{C}$
Operating humidity	RH	0~95%
Storage temperature range	$\Theta_{storage}$	$-40^\circ\text{C} \sim 105^\circ\text{C}$
Service life		100000h
At $\Theta_{hotspot}$		$\leq 70^\circ\text{C}$
Failure quota		300Fit
<b>Test data</b>		
Voltage test between terminals	$V_{tt}$	450V.AC/10S
A.C. voltage test between terminals and case	$V_{t-c}$	3000V.AC/10S
Operating altitude		2000m (max)
Terminal tightening torque		—
Bottom tightening torque		—
Weight		kg

# Electrical Characteristics of Film Capacitor

## 1. Lifetime Expectancy

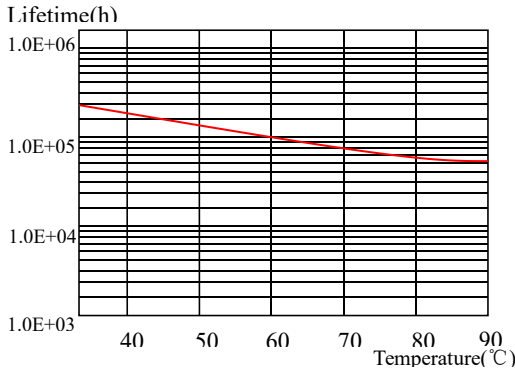


Lifetime expectancy vs. Charging temperature

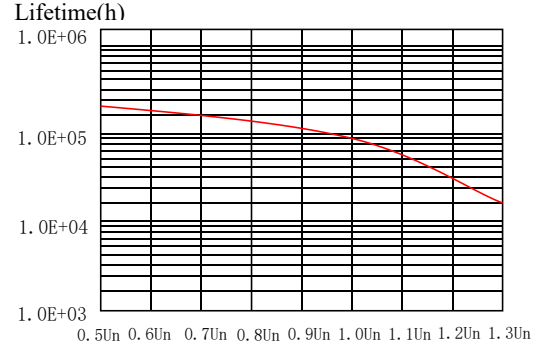


Lifetime expectancy vs. Charging voltage


## 2. Temperature Characteristics

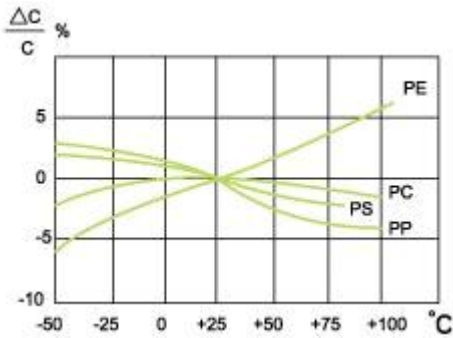


Capacitance change rate vs. Temperature

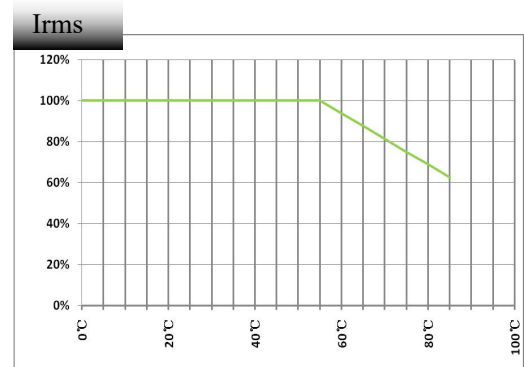

Operating current vs. Temperature

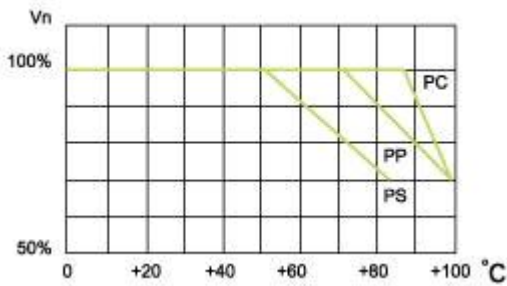


Operating voltage vs. Temperature

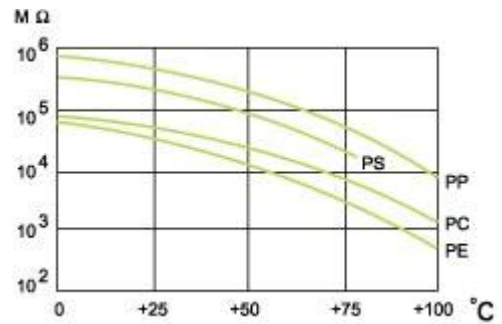


(CR value) IR vs. Temperature

## 3. Frequency Characteristics

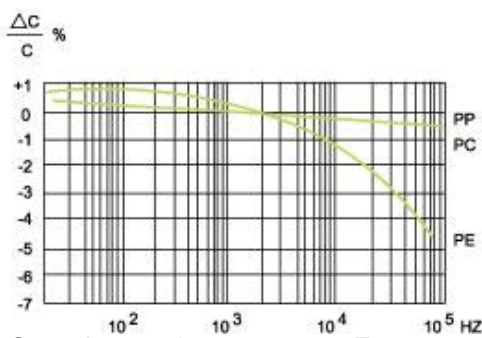

Capacitance change rate vs. Frequency

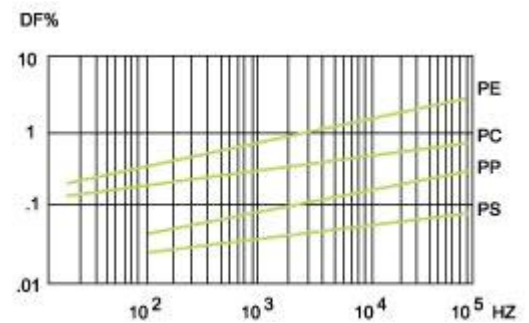

Dissipation factor vs. Frequency

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [crc manufacturer](#):*

Other Similar products are found below :

[20581](#) [31262](#) [FS7110](#) [101513161231](#) [30344-003](#) [32722](#) [102553161231](#) [20584](#) [30463](#) [12006-002](#) [100364011242](#) [33164](#) [32168](#)  
[100364071242](#) [GX3045](#) [100364001242](#) [100364081242](#) [AC6028](#) [100043911231](#) [YX4010J](#) [FC6069](#) [100364051242](#) [100364041242](#) [RS5025](#)  
[GX4218C](#) [YX4314](#) [YX4384J](#) [GY4004](#) [HS5044](#) [AC5019](#) [HA4037](#) [GX5064C](#) [GX4115](#) [GX4115C](#) [GX4125C](#) [GX4128J](#) [GX4212C](#) [GX4228](#)  
[GX5051J](#) [YX4411C](#) [YX5011J](#) [YX5075C](#) [GX4223C](#) [AC5030](#) [HA4002](#) [YX4135C](#) [GY3005](#) [HS5005](#) [GX4100C](#) [YX4278J](#)