

Product Code:

LPB2418A-TB-12-2.8-15.0-R



Picture:`




Specification:

Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	3∼20
*Rated Current	(mA)	≤15
*Sound Output at 10cm	(dB)	≥90
*Resonance Frequency	(KHz)	2.8±0.5
Tone		Continuous
Operating Temperature	(°C)	- 40∼+85
Storage Temperature	(℃)	- 40∼+90
Weight	(g)	4.8
Housing Material		PBT
RoHS		Yes

Remark: The special requirements in the test for no anti reverse connection.


Test basic state: Temp($20\pm2^{\circ}$ C), Humidity($40\sim70\%$ RH), Air pressure($860\sim1060$ hPa).

SPL & Current Consumption vs. Input Voltage:



Dimensions (Unit: mm)

Tolerance: ±0.5mm Except Specified

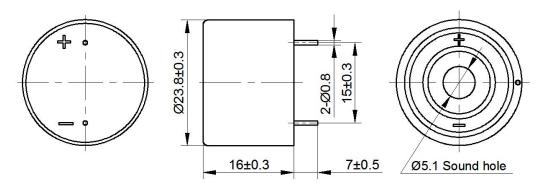

^{*}Value applying at rated voltage.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for CRE-SOUND ELECTRONICS manufacturer:

Other Similar products are found below:

<u>LEB1614-06B-2.3-7.6-R-LAB</u> <u>LEB1614-12B-2.3-7.6-R-LAB</u> <u>LEB9055B-05B-2.7-5.0-R</u> <u>LET5030DS-03L-4.0-12-R</u> <u>LPB1475B-TO-12-4.0-7.6-R-LAB</u> <u>LPB1580DS-HS-05-4.0-R</u> <u>LPB2418A-TB-12-2.8-15.0-R</u> <u>LPB2418A-TB-12-3.5-15.0-R</u> <u>LPB3095W1005-TA-12-3.5-R</u> <u>LPB4216SW1003-TA-12-2.8-R</u> <u>LPB4216SW1405-TA-12-2.8-R</u> <u>LPT1770A-TB-05-4.0-15-10.0-R</u> <u>LPT1770H-TO-05-4.0-14-10.0-R</u>