

## 2 Nm double ovoid 3.9 Watts 3.9 W Part number 82869007



- Torque rating of gearboxes : 2 Nm, high-performance plastic gears
- Motors : nominal power 3 W, interference suppression for standard stocked products
- Wide speed range : 0.3 to 430 rpm
- Optional encoder built into the motor

### Part numbers

|          | Type  | Type   | Voltage | Output speed (rpm) | Ratios (i) |
|----------|-------|--------|---------|--------------------|------------|
| 82869007 | 3.9 W | 828690 | 12 V    | 27                 | 160        |

### Specifications

#### General characteristics

|  |        |
|--|--------|
| Motor  | 828600 |
| Gearbox  | 810330 |
| Maximum permitted torque from gearmotor under continuous conditions for 1 million turns (Nm) | 2      |
| Axial load static (daN)  | 1      |
| Radial load static (daN)   | 10     |
| Max. output power (W)  | 3,9    |
| Nominal output (W)   | 3      |
| Gearbox case temperature rise (°C)   | 50     |
| Weight (g)   | 240    |

### Made to order products, available on request

#### Motors :

- Other supply voltages
- Motor with 2 ball bearings
- Shaft lengths at front and/or rear
- Lead outputs or radial tag terminals
- Special interference suppression
- Encoder : 5 pulses/rev

#### Gearboxes :

- Special shaft
- Ball bearings
- Special greasing
- Torque limiter F
- Gearbox fixing M3
- Other speeds

### Dimensions (mm)

828690




| N° | Legend   |
|----|--|
| 1  | 2 fixing holes $\text{Ø} 3.2$                                    |
| 2  | 3 bosses $\text{Ø} 7.2$ at $120^\circ$ on $R=19.5$ with M3 holes |

|   |   |
|---|---|
| ① | 2 standard tags NFC 20-120, series 2.8 x 0.5 mm |
| ② | Shaft pushed-in                                 |
| ③ | 5 across flats                                  |

**Dimensions (mm)**


Shaft 79202573

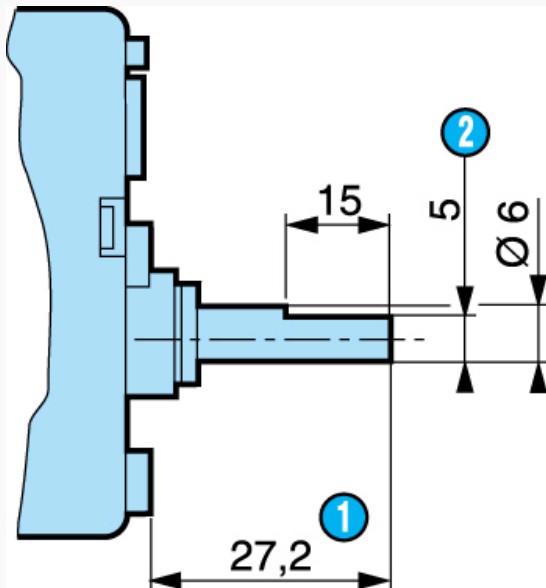

| N° | Legend          |
|----|-----------------|
| ①  | Shaft pushed-in |
| ②  | 5 across flats  |

**Curves**

Curve : torque/nominal speed

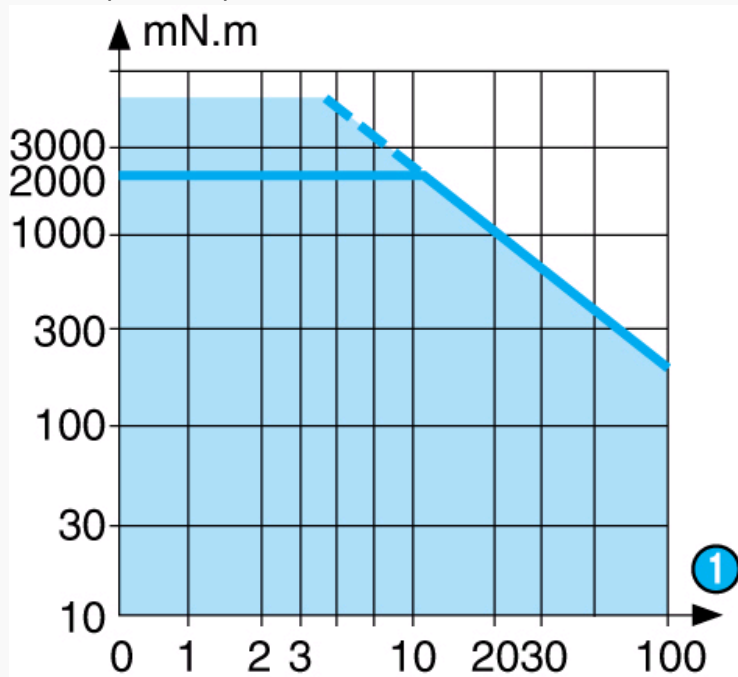

| N° | Legend |
|----|--------|
| ①  | rpm    |

**Product adaptations**

- Special supply voltage
- Lead output
- 1 or 5 pulse Hall effect encoder
- Special connectors
- Special shaft
- Special reduction ratio
- Special materials for gears
- Special ball bearings
- Special adaptor plate
- Finishing and system Y
- More than 200 reduction ratios available
- With shorter 1 W motor

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [AC, DC & Servo Motors](#) category:*

*Click to view products by [Crouzet](#) manufacturer:*

Other Similar products are found below :

[79207644](#) [805470B40040MY](#) [80807028](#) [808070Y01125Z](#) [808550Y00049Z](#) [823055C10001MWY](#) [82520405](#) [82664024](#) [82802504](#)  
[R88MK10030H](#) [M4E068-EC03-01](#) [M4E068-CF01-01](#) [79265119](#) [80510503](#) [805470A40040MY](#) [805470B40020MY](#) [80627003](#)  
[808070Y00250Y](#) [808070Y83.33Y](#) [823055A20001MW](#) [825140A40010MP](#) [825290C43.75MX](#) [82714023](#) [82800003](#) [82830009](#) [82810017](#)  
[R88M-K90010F-S2](#) [89830012](#) [82840003](#) [82840004](#) [82869011](#) [82524021](#) [82862202](#) [82869006](#) [82861013](#) [80803009](#) [80547015](#) [82862205](#)  
[R88M-K40030T-B](#) [80527006](#) [82330514](#) [81021118](#) [82524004](#) [89800008](#) [82867009](#) [82662564](#) [82662515](#) [82600041](#) [82524008](#) [82524006](#)