

83229 Manually operating 832295 Part number 832295



- Very compact dimensions
- Rating from 1 mA / 5 V DC to 5 A / 250 V AC
- Threaded barrel fixing
- Long mechanical life

Part numbers

Type	Functions	Connections
832295 Manually operating 832295	Changeover	W2 solder

Specifications

General characteristics

Microswitch	832290
-------------	--------

Presentation

Threaded barrel nickel brass	▪
Black dural button	▪
Chrome-plated nut	▪

Mechanical characteristics


Protection against electric shocks to IEC 536 and NF 20030	Class I
Mechanical durability of operating device (operating cycles)	10 ⁵
Weight (g)	5,5

Other characteristics

Mounting - Operation

See basic technical concepts.


Principles



Dimensions (mm)

Product

832295

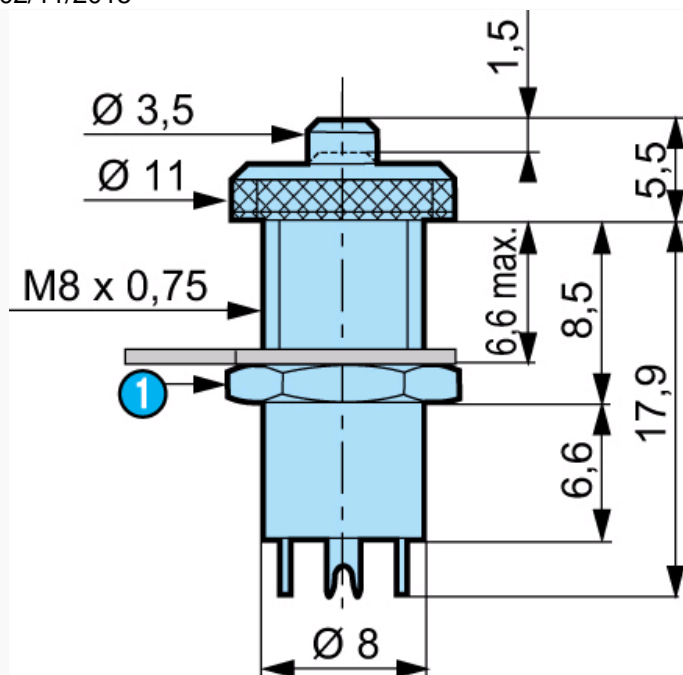


N°	Legend
1	Retaining nut : 10 flats

Dimensions (mm)


Connections

W2 solder

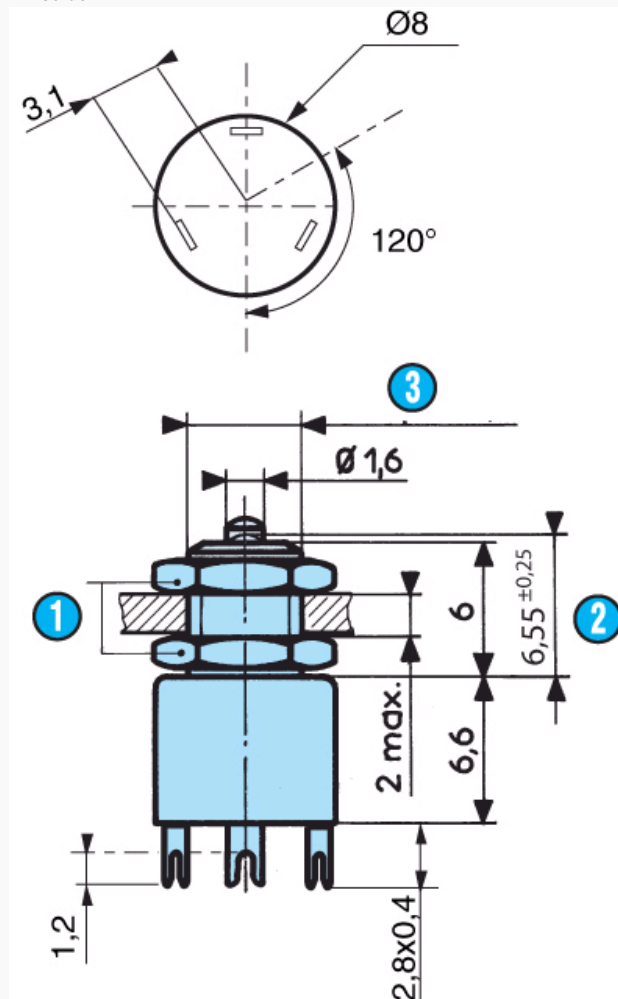

Curves

Operating curve for type 83229

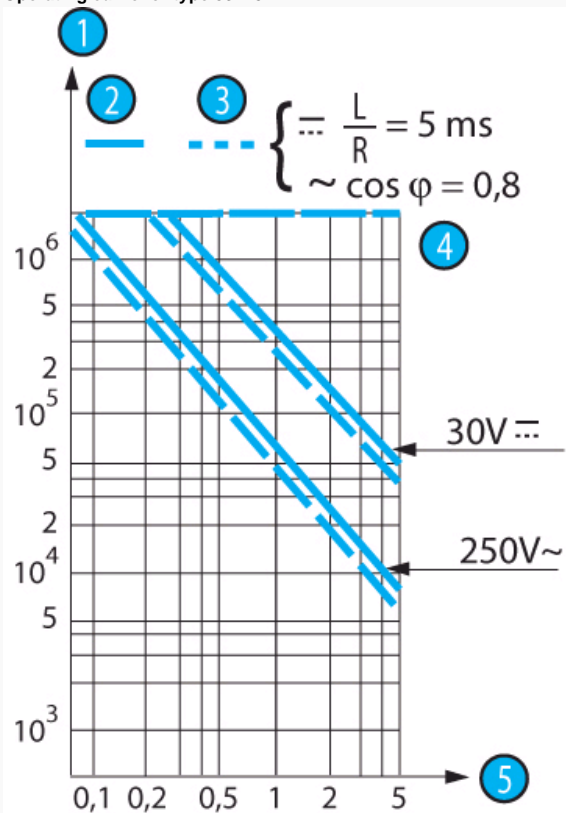

N°	Legend
①	Number of operations
②	Resistive circuit
③	Inductive circuit
④	Rating in Amps

Other information

Accessories : please consult us.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [Crouzet](#) manufacturer:

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#) [6HM89](#) [6SE1](#)
[6SX1-H58](#) [70500216](#) [70599106](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [EXD-AR20](#) [79211923](#) [79218589](#) [7AS12](#)
[MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#)
[914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM1-TN107](#) [11SM405](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#)
[11SM76-T](#) [11SM77-H58](#) [11SM77-T](#) [11SM863-T](#) [11SM866](#) [A7CN-1M-1-LEFT](#) [A831700C7.0](#) [121EN188-R](#) [1245.0120](#)