

83589 Top-mounted plunger Part number 83589031



- Press button protected by O-ring and scraper seal

Part numbers

Type	Housing	Features
83 589 031 Top-mounted plunger	Thermoplastic	Standard

Specifications

Conformity to standards	NFC 20030 class I (the plunger is operated manually by an earthed metal part, or by an insulated part which provides additional insulation).
Version	Single-pole
Protection	IP66 resistant to hydrocarbons and saline mist (400 hours)

Electrical characteristics

Electrical endurance	Standard : 8 A 250 VAC : 30,000 operations 200 mA 24 V DC relay load L / R = 3 ms 10 ⁷ operations Dual-current : 1 mA 4 VAC : 10 ⁷ operations 200 mA 24 V DC relay load L / R = 3 ms 5 x 10 ⁶ operations 5 A 250 VAC : 30,000 operations
Dual-current	This version is designed to operate both on dual-current (1 mA 4 V minimum) and medium-current (5A) circuits. However, a given product should only be used to switch one type of circuit during its working life.

Connections

Cable	PVC Ø5 - 3 x 0.75 mm ² Length 0.50 m Conforming to NFR 13414/13415
Mounting	Max. tightening torque 9 Nm

Mechanical characteristics

Minimum operating force (N)	10
Minimum total travel force (N)	15
Minimum operating travel (mm)	2
Differential travel (mm)	0,1
Maximum total travel (mm)	4,5
Mechanical life (millions of operations) mini.	10 ⁷
Operating temperature (°C)	-40 → +85
Protection rating	IP66/67
Weight (g)	80

Additional characteristics

Material

- Case : Thermoplastic polyester
- Plunger : Stainless steel
- Contact : Agcdo - AgNi (gold-plated)
- Nuts : Galvanized steel

Sealing


- O-ring : Silicon
- Scraper seal : Teflon
PU resin

Principles**Function**

Single break two-way contact element (form C : changeover)

N°	Legend
①	Black (common)
②	Grey (NC)
④	Blue (NO)

Dimensions (mm)**Product**

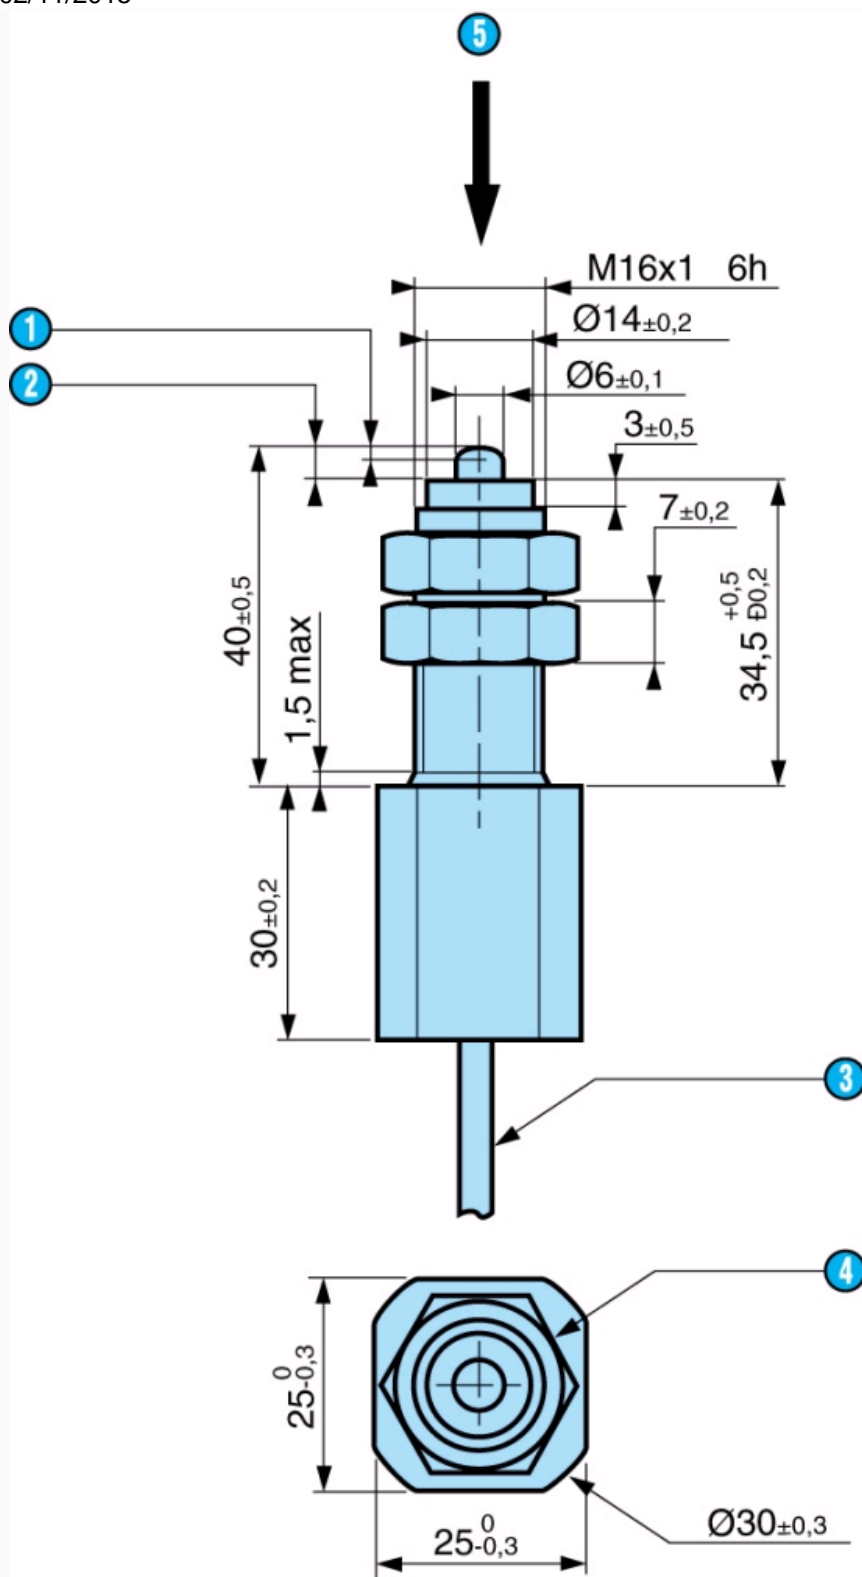

N°	Legend
1	Operating travel
2	Total travel
3	Cable Ø5 - 3 x 0.75 mm ² Length 0.50 m
4	21 across flats
5	Direction of operation

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Limit Switches](#) category:

Click to view products by [Crouzet](#) manufacturer:

Other Similar products are found below :

[5ML1-E1](#) [5ML31](#) [LZG1](#) [LZL1-6C](#) [622EN114-R](#) [622EN18-6](#) [622EN224-6B](#) [622EN230](#) [622EN237-R](#) [622EN69-3](#) [622EN85-RB](#) [MA-10019](#)
[6PA109](#) [7LS51](#) [83547001](#) [83725002](#) [83830001](#) [83840701](#) [83841001](#) [83881140](#) [8AS42](#) [8LS10](#) [8LS125-4PG](#) [8LS152-4PGN20](#) [914CE16-](#)
[3A](#) [914CE3-3L1](#) [915PA10](#) [91MCE16-P2O](#) [924CE16-Y3](#) [924CE1-S6](#) [924CE1-T25A](#) [924CE1-T3](#) [924CE1-T9A](#) [924CE2-T9](#) [924CE31-Y20-](#)
[X5](#) [924CE31-Y3L1](#) [GL-10054](#) [GLDB03C-6](#) [GLDC05C](#) [GLZ324](#) [H3141CAKAA](#) [RDI-G-L5B](#) [DD-10000](#) [DT-2R3-A7](#) [14CE16-3N28](#)
[14CE18-N15](#) [151ML3-E1](#) [E3102BAAAA](#) [BFL1-AW1-S](#) [1EN329-R](#)