Remote LED display - Input 0-10 V RD Part number 88950400



- Highlight the data of your automation application
 Display (36 x 72 mm) with 4 x 14 mm red digits
- Configurable display range • 0-10 V input
- IP65 degree of protection on front panel

Part numbers

Туре	Description	Supply
88950400 RD	Display with 4 x 14 mm red digits	24 V DC

Specifications

Environmental characteristics	
Certifications	CE
Conformity to standards	IEC/EN 61000-6-4, IEC/EN 61010-1
Protection rating	In accordance with IEC/EN 60529 : IP65 on front panel IP20 on rear
Operating temperature	-10 ->+55 °C
Dimensions (I x h x w)	36 x 72 x 61 mm
Panel cut-out	71 x 29 mm

Electrical characteristics

Supply	24 V DC
Tolerance	± 10 %
Consumption	<1W
Input voltage	0 →10 V DC

Mechanical characteristics


Mounting	Flush-mounted
Connection	Terminal block

Display characteristics

Height of digits	14 mm
Number of digits	4
Colour	Red
Range	-19995999 with selectable decimal point
Device accuracy (full scale)	≤± 0.3 % of interval

Comments

Dimensions (mm)

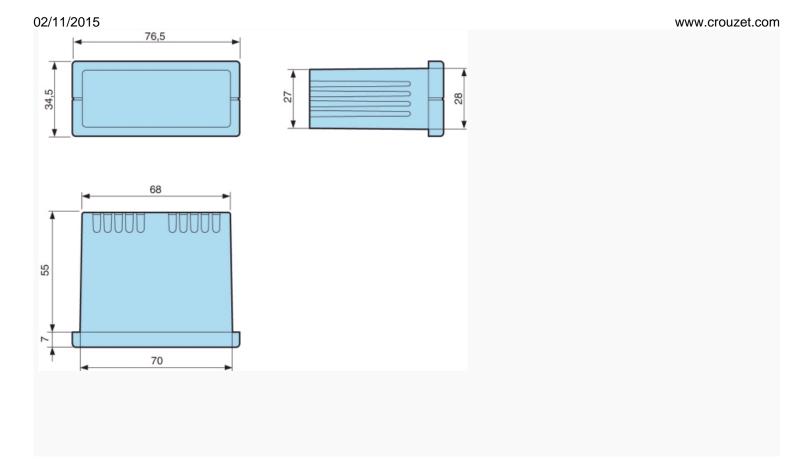

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Digital Panel Meters category:

Click to view products by Crouzet manufacturer:

Other Similar products are found below :

 M00558-00
 70.360.4828.0
 72331-00
 85310-25
 86642-00
 87268-13
 87316-00
 87719-26
 98107-56
 HB8260-R36-90
 DMS-20ACV-3-R-C

 EM11DINAV81XR1X
 25.325.3253.1
 25.325.4253.1
 25.330.0453.1
 20046-20
 20182-23
 AP1021
 25.320.5053.0
 25.350.3453.1

 25.394.3653.1
 25.521.3253.0
 28006-01
 04.630.1080.0
 20078-20
 EM11DINAV81XO1X
 85874-26
 87166-00
 87895-00
 28000-03
 82322K

 11
 86641-00
 87004-00
 HB8280R2490
 HB8260R4890
 SCE016MD3MV0W10
 20125-21
 86640-00
 PG-100-103GP
 PG-100-102RP
 PG

 100B-102R-H
 PG-100B-103R
 PG-100-103GH
 PG-100-101RP
 F452830F
 F451730
 AM-I-2-5-CE
 AM-I-3-5-250-CE
 AM-I-3-5-250-CE