

NTC probes PVC Part number 89750174



- Direct connection with no converter on analog input
- Easy-to-use and low-cost temperature control solution
- Fields of application : HVAC, compressors, geothermal systems, swimming pools, fountains
- Analog input configured as a potentiometer via the NTC functions in the M3 Soft (minimum AC 5)

Part numbers

Type	Description	Ohmic value	Measurement range
89750174 PVC	NTC2 probe PVC for Millennium 3 (24 V DC, ± 10 %)	10 kΩ @ 25 °C	-25 →+85 °C

Specifications

General characteristics

Environmental characteristics

Operating temperature	-25 →+85 °C	-25 →+85 °C	-25 →+120 °C	-20 →+105 °C	-40 →+200 °C
Storage temperature	-30 →+100 °C	-30 →+100 °C	-40 →+180 °C	-40 →+105 °C	-40 →+200 °C
Accuracy	-25 →+40 °C : ± 0,8 °C (repeatability ± 0,5 °C) +40 →+70 °C : ± 2 °C (repeatability ± 1 °C) +70 →+85 °C : ± 3 °C (repeatability ± 2 °C)	-25 →+40 °C : ± 0,8 °C (repeatability ± 0,5 °C) +40 →+50 °C : ± 1,2 °C (repeatability ± 1 °C) +50 →+60 °C : ± 1,4 °C (repeatability ± 1,4 °C) +60 →+70 °C : ± 2 °C (repeatability ± 2 °C) +70 °C →+85 : ± 3 °C (repeatability ± 2 °C)	-35 →+40 °C : ± 0,8 °C (repeatability ± 0,5 °C) +40 →+70 °C : ± 2 °C (repeatability ± 1 °C) +70 →+120 °C : ± 3 °C (repeatability ± 2 °C)	-20 →+40 °C : ± 0,8 °C (repeatability ± 0,5 °C) +40 →+70 °C : ± 2 °C (repeatability ± 1 °C) +70 →+105 °C : ± 3 °C (repeatability ± 2 °C)	0 →+40 °C : ± 3 °C (repeatability ± 1 °C) +40 °C →+140 °C : ± 2 °C (repeatability ± 1 °C) +140 °C →+180 °C : ± 3 °C (repeatability ± 1 °C)

Mechanical characteristics

Material	PVC	AS	Inox	POM (polyoxymethylene)	Silicone
Cable	PVC	2 wires	PVC (105 °C max.)	PVC (105 °C max.)	Silicone (200 °C max.)
Cable length	3000 mm	600 mm	3000 mm	3000 mm	800 mm
Protection rating	IP67	-	IP64	IP67	IP64
Isolation class	-	-	1	2	1
Dielectric strength according to IEC 335	-	1000 V AC / 1 mn	1250 V AC / 1 mn	-	2000 V AC / 1 mn
Dimensions	Threading 1/2" Length 68 mm	5 x 6 mm Length 15 mm	Ø 4,8 Length 30 mm	Ø 6 mm Length 30 mm	Ø 5 Length 30 mm


Comments

Accessories

Accessories	Operating temperature	Operating pressure	Code
Copper protective sleeve	-20 →+100 °C	10 bar	89750146
316 stainless steel protective sleeve	-20 →+400 °C	16 bar	89750147

Dimensions (mm)


89750174

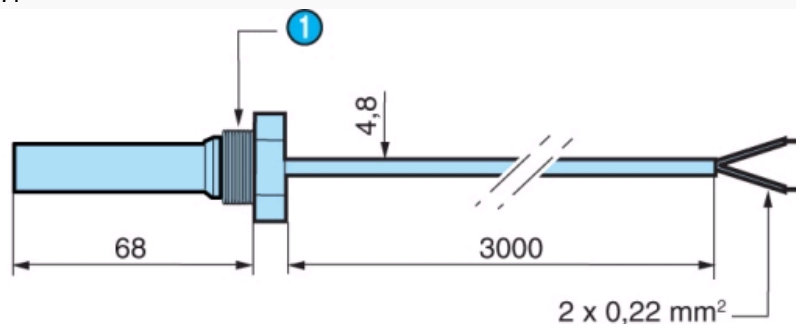

N°	Legend
1	1/2 inch thread

Connections

 $\approx 24V \pm 10\%$

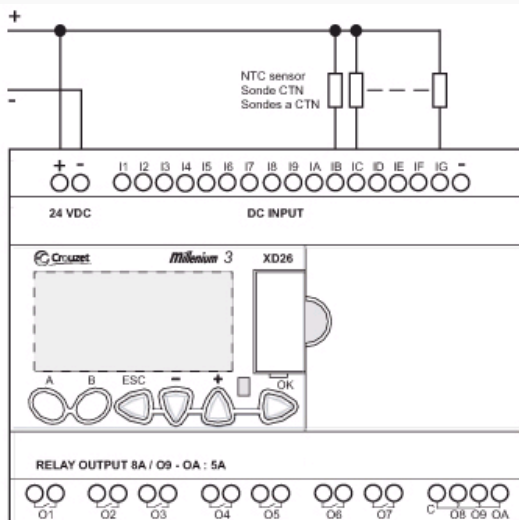

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Temperature Sensors](#) category:

Click to view products by [Crouzet](#) manufacturer:

Other Similar products are found below :

[590-32AC34-103-WRI](#) [590-59CN02-103](#) [A1004SG22P0](#) [HEL-736-U-2-36](#) [G9864ST22F0](#) [HEL-717-U-0-24-00](#) [R-8203](#) [519-39AW09-245](#)
[519-39CH01-295](#) [521-43BC01-202](#) [535-34AE08-303](#) [512-32AQ01-503](#) [521-33AG04-303](#) [521-53BR01-503](#) [E52P6DY4M](#) [535-34AE09-222](#)
[590-32AC34-103](#) [590-32AD05-103](#) [E52-P6DY 2M](#) [A1004SX22P0](#) [E52-P20C-N D=8](#) [E52-THE5A 100-200 2M](#) [T200-C32-M14-C](#) [HRTS-](#)
[5760-B-T-0-18](#) [IOT-9CLT](#) [IOT-9CLT-2](#) [IOT-9CLT-8](#) [LTPCTGA20MBSIBX01](#) [LTPCTFA30MBSITX01](#) [LTPCTFA20MBSIDX01](#)
[LTPCTAA20MDSIEX01](#) [BB-HS-104T2505402](#) [NCP81255MNTXG](#) [HEL-707-T-1-24-00](#) [HEL-716-U-0-24-00](#) [A-2142](#) [USW2247](#) [R-11614-](#)
[1](#) [RP103ST22P2](#) [R-10331-3F6](#) [E52-P20AY-D32 4M](#) [89750186](#) [79696038](#) [79696039](#) [A1004AS20T1](#) [JS7352](#) [JI-F103WN-L301](#) [JI-](#)
[F103WN-L252](#) [JI-103C1R2-L102](#) [JI-F103WN-L102](#)