

NTC probes AS Part number 89750180



- Direct connection with no converter on analog input
- Easy-to-use and low-cost temperature control solution
- Fields of application : HVAC, compressors, geothermal systems, swimming pools, fountains
- Analog input configured as a potentiometer via the NTC functions in the M3 Soft (minimum AC 5)

Part numbers

Type	Description	Ohmic value	Measurement range
89750180 AS	NTC1 probe (batch of 10) for Millenium 3 (24 V DC, $\pm 10\%$)	10 k Ω @ 25 °C	-25 \rightarrow +85 °C

Specifications

General characteristics

Environmental characteristics

Operating temperature	-25 \rightarrow +85 °C	-25 \rightarrow +85 °C	-25 \rightarrow +120 °C	-20 \rightarrow +105 °C	-40 \rightarrow +200 °C
Storage temperature	-30 \rightarrow +100 °C	-30 \rightarrow +100 °C	-40 \rightarrow +180 °C	-40 \rightarrow +105 °C	-40 \rightarrow +200 °C
Accuracy	-25 \rightarrow +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 \rightarrow +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +70 \rightarrow +85 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	-25 \rightarrow +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 \rightarrow +50 °C : $\pm 1,2$ °C (repeatability $\leq \pm 1$ °C) +50 \rightarrow +60 °C : $\pm 1,4$ °C (repeatability $\leq \pm 1,4$ °C) +60 \rightarrow +70 °C : ± 2 °C (repeatability $\leq \pm 2$ °C) +70 °C \rightarrow +85 : ± 3 °C (repeatability $\leq \pm 2$ °C)	-35 \rightarrow +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 \rightarrow +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +70 \rightarrow +120 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	-20 \rightarrow +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 \rightarrow +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +70 \rightarrow +105 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	0 \rightarrow +40 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 1$ °C) +40 °C \rightarrow +140 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +140 °C \rightarrow +180 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 1$ °C)

Mechanical characteristics

Material	PVC	AS	Inox	POM (polyoxymethylene)	Silicone
Cable	PVC	2 wires	PVC (105 °C max.)	PVC (105 °C max.)	Silicone (200 °C max.)
Cable length	3000 mm	600 mm	3000 mm	3000 mm	800 mm
Protection rating	IP67	-	IP64	IP67	IP64
Isolation class	-	-	1	2	1
Dielectric strength according to IEC 335	-	1000 V AC / 1 mn	1250 V AC / 1 mn	-	2000 V AC / 1 mn
Dimensions	Threading 1/2" Length 68 mm	5 x 6 mm Length 15 mm	$\varnothing 4,8$ Length 30 mm	$\varnothing 6$ mm Length 30 mm	$\varnothing 5$ Length 30 mm


Comments

Accessories

Accessories	Operating temperature	Operating pressure	Code
Copper protective sleeve	-20 \rightarrow +100 °C	10 bar	89750146
316 stainless steel protective sleeve	-20 \rightarrow +400 °C	16 bar	89750147


Dimensions (mm)

89750180

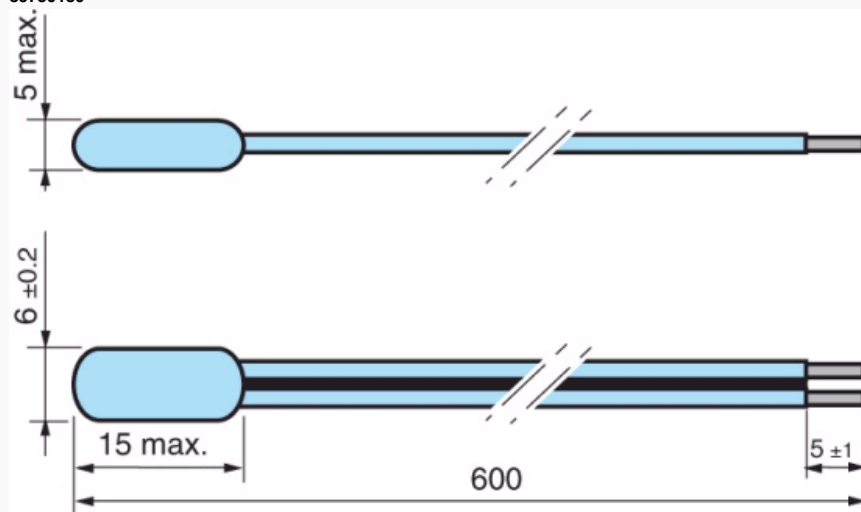

Connections

CA 89750183

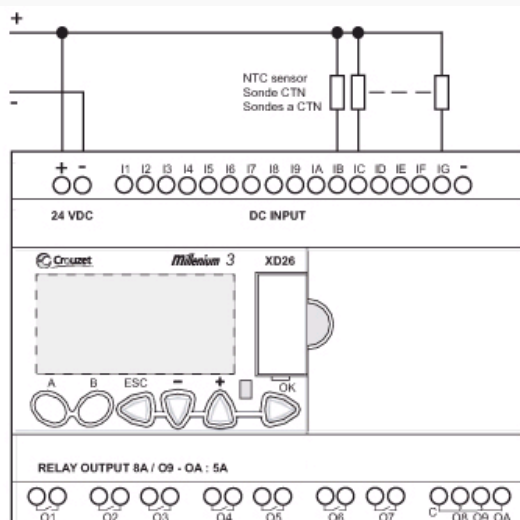 24V +/- 10%


X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Temperature Sensors](#) category:

Click to view products by [Crouzet](#) manufacturer:

Other Similar products are found below :

[590-32AC34-103-WRI](#) [590-59CN02-103](#) [G9864ST22F0](#) [HEL-705-U-0-12-C1](#) [HEL-736-U-2-36](#) [HEL-717-U-0-24-00](#) [519-39AW09-245](#)
[519-39CH01-295](#) [535-32AB36-202](#) [535-34AE08-303](#) [512-32AQ01-503](#) [521-33AG04-303](#) [521-53BR01-503](#) [E52P6DY4M](#) [535-34AE09-222](#)
[590-32AC34-103](#) [590-32AD05-103](#) [HEL-705-U-0-36-00](#) [E52-CA6D-N 4M](#) [E52-P6DY 2M](#) [E52-P20C-N D=8](#) [E52-THE5A 100-200 2M](#)
[HRTS-5760-B-T-0-18](#) [6655-71990001](#) [LTPCTGA20MBSIBX01](#) [LTPCTAA20MDSIEX01](#) [BB-HS-104T2505402](#) [NCP81255MNTXG](#) [HEL-](#)
[707-T-1-24-00](#) [HEL-716-U-0-24-00](#) [USW2247](#) [R-11614-1](#) [RP103ST22P2](#) [R-10331-3F6](#) [E52-P20AY-D32 4M](#) [B57045K0222K000](#)
[B57045K0154K000](#) [PPG102A6](#) [R-7119](#) [R-8949-34](#) [BB-WTJ-10-36-TT](#) [20006233-00](#) [USW2889](#) [E52-P35C-ND3.2](#) [IWTTP100A](#) [NB-](#)
[PTCO-142](#) [B57045K0682K000](#) [R-10224-16](#) [R-1630](#) [R-8204](#)