

## NTC probes Stainless Part number 89750182



- Direct connection with no converter on analog input
- Easy-to-use and low-cost temperature control solution
- Fields of application : HVAC, compressors, geothermal systems, swimming pools, fountains
- Analog input configured as a potentiometer via the NTC functions in the M3 Soft (minimum AC 5)

### Part numbers

Type	Description	Ohmic value	Measurement range
89750182 Stainless	NTC2 probe stainless 305 for Millenium 3 (24 V DC, $\pm 10\%$ )	10 k $\Omega$ @ 25 °C	-35 $\rightarrow$ +120 °C

### Specifications

#### General characteristics

#### Environmental characteristics

Operating temperature	-25 $\rightarrow$ +85 °C	-25 $\rightarrow$ +85 °C	-25 $\rightarrow$ +120 °C	-20 $\rightarrow$ +105 °C	-40 $\rightarrow$ +200 °C
Storage temperature	-30 $\rightarrow$ +100 °C	-30 $\rightarrow$ +100 °C	-40 $\rightarrow$ +180 °C	-40 $\rightarrow$ +105 °C	-40 $\rightarrow$ +200 °C
Accuracy	-25 $\rightarrow$ +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 $\rightarrow$ +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +70 $\rightarrow$ +85 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	-25 $\rightarrow$ +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 $\rightarrow$ +50 °C : $\pm 1,2$ °C (repeatability $\leq \pm 1$ °C) +50 $\rightarrow$ +60 °C : $\pm 1,4$ °C (repeatability $\leq \pm 1,4$ °C) +60 $\rightarrow$ +70 °C : $\pm 2$ °C (repeatability $\leq \pm 2$ °C) +70 °C $\rightarrow$ +85 : $\pm 3$ °C (repeatability $\leq \pm 2$ °C)	-35 $\rightarrow$ +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 $\rightarrow$ +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +70 $\rightarrow$ +120 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	-20 $\rightarrow$ +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 $\rightarrow$ +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +70 $\rightarrow$ +105 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	0 $\rightarrow$ +40 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 1$ °C) +40 °C $\rightarrow$ +140 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +140 °C $\rightarrow$ +180 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 1$ °C)

#### Mechanical characteristics

Material	PVC	AS	Inox	POM (polyoxymethylene)	Silicone
Cable	PVC	2 wires	PVC (105 °C max.)	PVC (105 °C max.)	Silicone (200 °C max.)
Cable length	3000 mm	600 mm	3000 mm	3000 mm	800 mm
Protection rating	IP67	-	IP64	IP67	IP64
Isolation class	-	-	1	2	1
Dielectric strength according to IEC 335	-	1000 V AC / 1 mn	1250 V AC / 1 mn	-	2000 V AC / 1 mn
Dimensions	Threading 1/2" Length 68 mm	5 x 6 mm Length 15 mm	$\varnothing 4,8$ Length 30 mm	$\varnothing 6$ mm Length 30 mm	$\varnothing 5$ Length 30 mm


#### Comments

#### Accessories

Accessories	Operating temperature	Operating pressure	Code
Copper protective sleeve	-20 $\rightarrow$ +100 °C	10 bar	89750146
316 stainless steel protective sleeve	-20 $\rightarrow$ +400 °C	16 bar	89750147

#### Dimensions (mm)


89750182

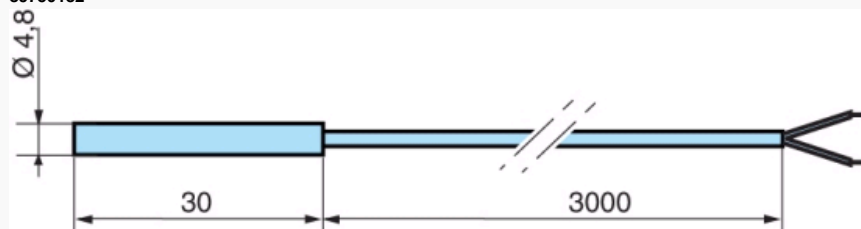

#### Connections

CA 89750183

⚠ 24V +/- 10%

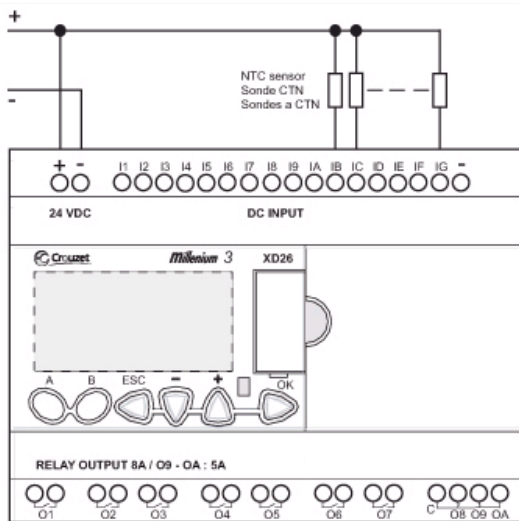

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Industrial Temperature Sensors](#) category:*

*Click to view products by [Crouzet](#) manufacturer:*

Other Similar products are found below :

[590-32AC34-103-WRI](#) [590-59CN02-103](#) [G9864ST22F0](#) [HEL-705-U-0-12-C1](#) [HEL-736-U-2-36](#) [HEL-717-U-0-24-00](#) [519-39AW09-245](#)  
[519-39CH01-295](#) [535-32AB36-202](#) [535-34AE08-303](#) [512-32AQ01-503](#) [521-33AG04-303](#) [521-53BR01-503](#) [E52P6DY4M](#) [535-34AE09-222](#)  
[590-32AC34-103](#) [590-32AD05-103](#) [HEL-705-U-0-36-00](#) [E52-CA6D-N 4M](#) [E52-P6DY 2M](#) [E52-P20C-N D=8](#) [E52-THE5A 100-200 2M](#)  
[HRTS-5760-B-T-0-18](#) [6655-71990001](#) [LTPCTGA20MBSIBX01](#) [LTPCTAA20MDSIEX01](#) [BB-HS-104T2505402](#) [NCP81255MNTXG](#) [HEL-](#)  
[707-T-1-24-00](#) [HEL-716-U-0-24-00](#) [USW2247](#) [R-11614-1](#) [RP103ST22P2](#) [R-10331-3F6](#) [E52-P20AY-D32 4M](#) [B57045K0222K000](#)  
[B57045K0154K000](#) [PPG102A6](#) [R-7119](#) [R-8949-34](#) [BB-WTJ-10-36-TT](#) [20006233-00](#) [USW2889](#) [E52-P35C-ND3.2](#) [IWTTP100A](#) [NB-](#)  
[PTCO-142](#) [B57045K0682K000](#) [R-10224-16](#) [R-1630](#) [R-8204](#)