



CRYSTEK

MICROWAVE

A DIVISION OF CRYSTEK CORPORATION

50 GHZ LOW LOSS RF COAX CABLE ASSEMBLIES WITH 2.4mm STAINLESS STEEL CONNECTORS



50 GHz Low Loss Coaxial Cables

Features:

- Strain Relief:** Heavy duty adhesive strain relief
- Center Conductor:** Silver-plated solid copper
- Inner Shield:** Flat silver-plated copper strip
- Middle Shield:** High temp. aluminum polyimide foil
- Outer Shield:** PC (Round Silver-Plated Copper Braid)
- Dielectric:** Expanded PTFE, Type F (Polytetrafluoroethylene)
- Jacket:** ETFE, Type X per ASTM D3159
- Cable Outer Diameter:** 0.122" (3.10mm)
- Connectors:** SST, corrosion-resistant 303 stainless steel per ASTM-A582 (Passivated finish per SAE-AMS-2700)
- Center Pin:** GPBC (Gold-Plated Beryllium Copper)
- Jacket Color:** Grey
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 0.40"

Electrical Specifications:


- Impedance:** 50 Ohms
 - Frequency:** Up to 50 GHz
 - Insertion Loss:** <1.44 dB/ft at 50 GHz
 - VSWR:** <1.35 to 50 GHz
 - Max Oper. Voltage:** 500V RMS
 - Nominal Capacitance:** 27.0 pF/ft
 - Velocity of Propagation:** 78%
 - Shield Effectiveness:** Greater than 90 dB
 - Attenuation (dB/ft):**
 - 0.11 Max at 500 MHz
 - 0.17 Max at 1 GHz
 - 0.43 Max at 6 GHz
 - 0.63 Max at 12 GHz
 - 0.79 Max at 18 GHz
 - 0.97 Max at 26 GHz
 - 1.26 Max at 40 GHz
 - 1.44 Max at 50 GHz
- *connector loss not included

Mechanical Specifications:

- Connector Corrosion (salt spray):** MIL-STD-202, method 101, test cond. B 5% salt solution.
- Connector Durability:** 500 connections Minimum

Electrical Test Data Supplied With Each Cable Assembly
Custom Lengths Available

2.4mm / 2.4mm [Straight/Straight]

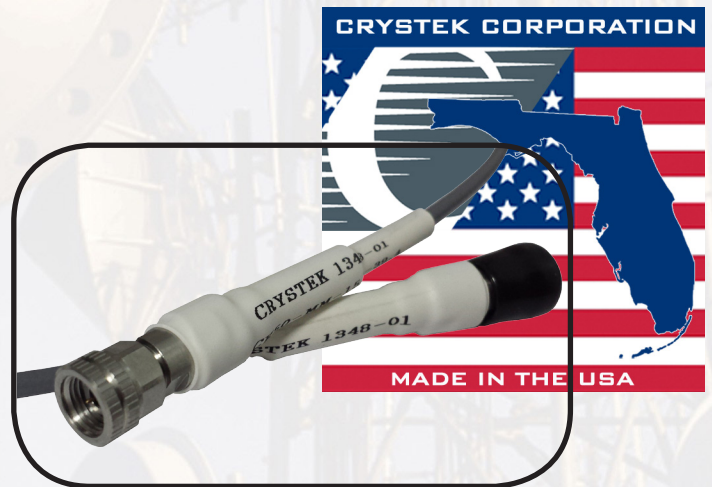

Part Number	Description	Length
CC2450-MM-150-24	50 GHz Low Loss Coax Cable, 2.4mm Male/Male, Straight/Straight	24"
CC2450-MM-150-39.4	50 GHz Low Loss Coax Cable, 2.4mm Male/Male, Straight/Straight	39.4"
CC2450-MM-150-48	50 GHz Low Loss Coax Cable, 2.4mm Male/Male, Straight/Straight	48"



CRYSTEK
CORPORATION





12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14



CRYSTEK MICROWAVE

A DIVISION OF CRYSTEK CORPORATION

50 GHZ LOW LOSS RF COAX CABLE ASSEMBLIES WITH 2.4mm STAINLESS STEEL CONNECTORS

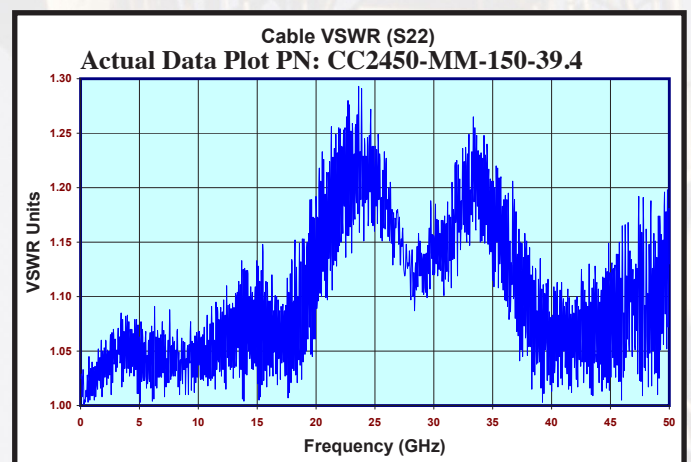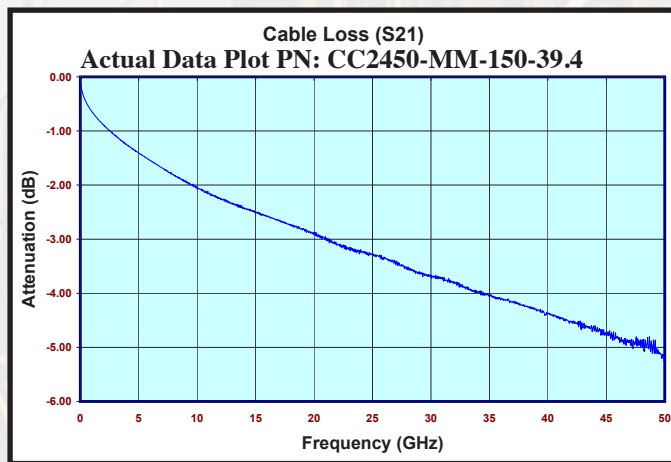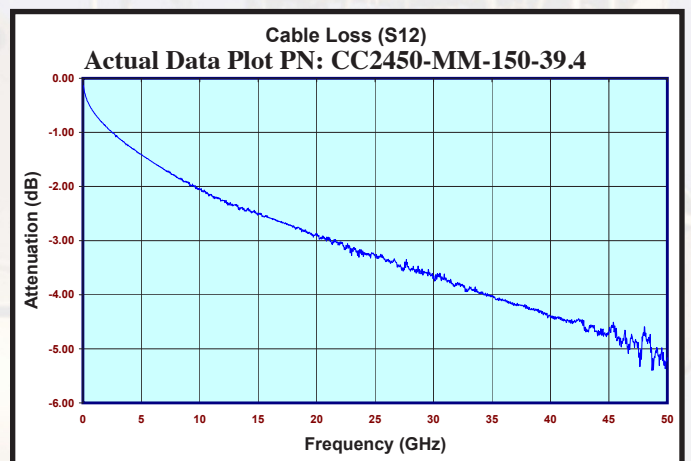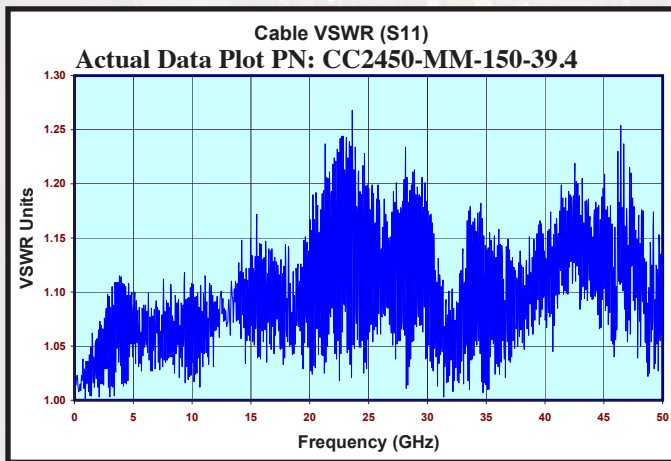

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)