

CCLD-033 5×7mm SMD LVDS Clock Oscillator

CCLD-033 Model
5×7 mm SMD, 3.3V, LVDS



Model CCLD-033 is a 77.760 MHz to 161.000 MHz LVDS Clock Oscillator operating at 3.3 Volts. The oscillator utilizes a High Q Third Overtone crystal design providing very low Jitter and Phase Noise. No Sub-Harmonics are present in the Output Signal.



5×7mm SMD

Applications:

**Digital Video
SONET/SDH/DWDM
Storage Area Networks
Broadband Access
Ethernet, Gigabit Ethernet**


| |
|-------------------|
| Rev: R |
| Date: 13-Feb-2017 |
| Page 1 of 3 |

CCLD-033 Model

5×7 mm SMD, 3.3V, LVDS



| | |
|--|---|
| Frequency Range: | 77.760 MHz to 161.000 MHz |
| Frequency Stability Options(ppm): | ±20, ±25, ±50, ±100 |
| Temperature Range: | (standard) 0°C to +70°C |
| | -20°C to +70°C |
| | (Option M) |
| | (Option X) |
| Storage: | -45°C to 90°C |
| Input Voltage: | 3.3V ± 0.3V |
| Input Current: | 66mA Max |
| Standby Current: | 30uA Max |
| Output: | Differential LVDS |
| Symmetry: | 45/55% Max @ zero crossing point |
| Rise/Fall Time: | 1ns Max (20% to 80%) |
| Load: | 100 Ohms Connected between OUT and COUT |
| Logic: | |
| Output Voltage Levels | “0”=0.90 Min, 1.10 Typical |
| | “1”=1.43 Typical, 1.60 Max |
| Differential Output Voltage: | 247mV Min, 454mV Max |
| Disable Time: | 200ns Max |
| Start-up Time: | 10ms Max |
| Phase Jitter: 12kHz~80MHz | 0.5ps Typical, 1ps RMS Max |
| Phase Noise: (See Plot Below) | |
| Sub-harmonics: | None |
| Aging: | <3ppm 1 st year, <1ppm every year thereafter |

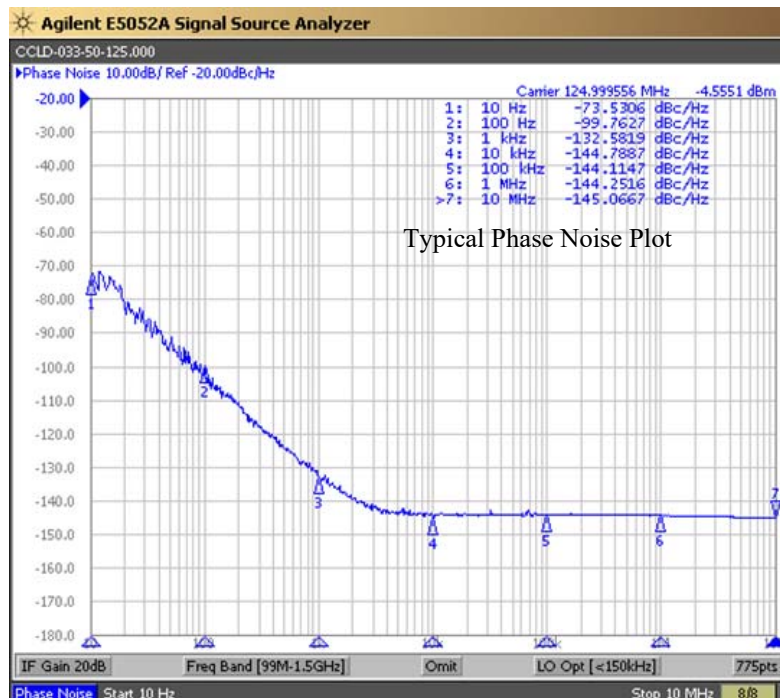

Rev: R
Date: 13-Feb-2017
Page 2 of 3



Specifications subject to change without notice.

CCLD-033 Model
5×7 mm SMD, 3.3V, LVDS




| Crystek Part Number Guide | | | | | | | | | | | | | |
|--|-------------|---------------------|--|-------|----------|----|---------|----|---------|-----|---------|--------------------------|--|
| CCLD - 033 X - 50 - 155.520 | | | | | | | | | | | | | |
| #1 | #2 #3 #4 #5 | | | | | | | | | | | | |
| <div style="border: 1px solid black; padding: 5px;"> <p>#1 Crystek LVDS Osc. #2 Model 033 #3 Temp Range: Blank = 0/70°C, M = -20/70°C, X = -40/85°C #4 Stability: (see Table 1) #5 Frequency in MHz: 3 or 6 decimal places</p> </div> | | | | | | | | | | | | | |
| <p>Example: CCLD-033X-50-155.520 3.3V, -40/85°C, ±50ppm, 155.520 MHz</p> | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2" style="text-align: center;">Stability Indicator</th> </tr> </thead> <tbody> <tr> <td>Blank</td> <td>± 100ppm</td> </tr> <tr> <td>50</td> <td>± 50ppm</td> </tr> <tr> <td>25</td> <td>± 25ppm</td> </tr> <tr> <td>20*</td> <td>± 20ppm</td> </tr> <tr> <td colspan="2">*not available in -40/85</td> </tr> </tbody> </table> <p style="text-align: center;">Table 1</p> | | Stability Indicator | | Blank | ± 100ppm | 50 | ± 50ppm | 25 | ± 25ppm | 20* | ± 20ppm | *not available in -40/85 | |
| Stability Indicator | | | | | | | | | | | | | |
| Blank | ± 100ppm | | | | | | | | | | | | |
| 50 | ± 50ppm | | | | | | | | | | | | |
| 25 | ± 25ppm | | | | | | | | | | | | |
| 20* | ± 20ppm | | | | | | | | | | | | |
| *not available in -40/85 | | | | | | | | | | | | | |


| Mechanical: | |
|-------------------------------|---|
| Shock: | MIL-STD-883, Method 2002, Condition B |
| Solderability: | MIL-STD-883, Method 2003 |
| Vibration: | MIL-STD-883, Method 2007, Condition A |
| Solvent Resistance: | MIL-STD-202, Method 215 |
| Resistance to Soldering Heat: | MIL-STD-202, Method 210, Condition I or J |
| Environmental: | |
| Thermal Shock: | MIL-STD-883, Method 1011, Condition A |
| Moisture Resistance: | MIL-STD-883, Method 1004 |

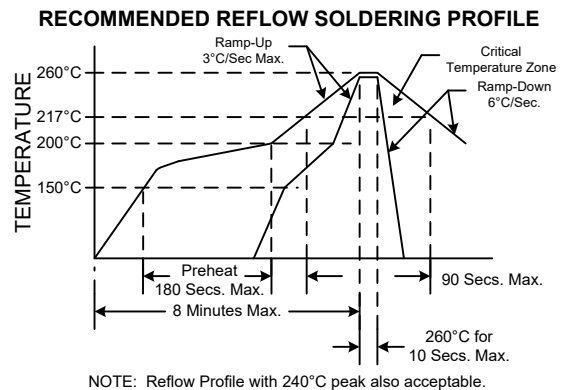


Dimensions inches (mm)
All dimensions are Max unless otherwise specified.

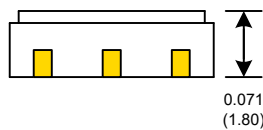

| Enable/Disable | |
|-----------------------------------|------------|
| Function pin 1 | Output pin |
| Open or N/C | Active |
| "1" level 0.7×V _{dd} Min | Active |
| "0" level 0.3×V _{dd} Max | High Z |

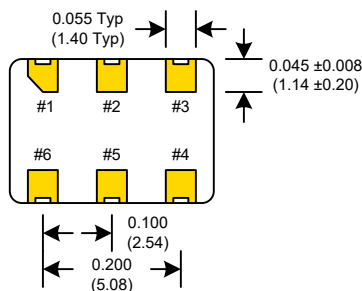

SUGGESTED PAD LAYOUT

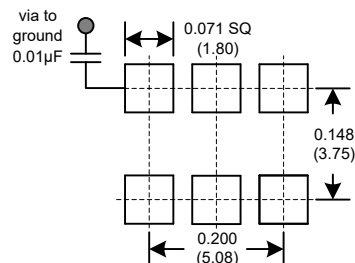

0.01µF Bypass Capacitor Recommended

| PIN | Connection |
|-----|-----------------|
| 1 | Enable/Disable |
| 2 | N/C |
| 3 | GND |
| 4 | Output |
| 5 | Comp Output |
| 6 | V _{cc} |

Rev: R
Date: 13-Feb-2017
Page 3 of 3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-25.000000X](#)