


True Sinewave Clock Oscillators and Voltage Controlled Crystal Oscillators

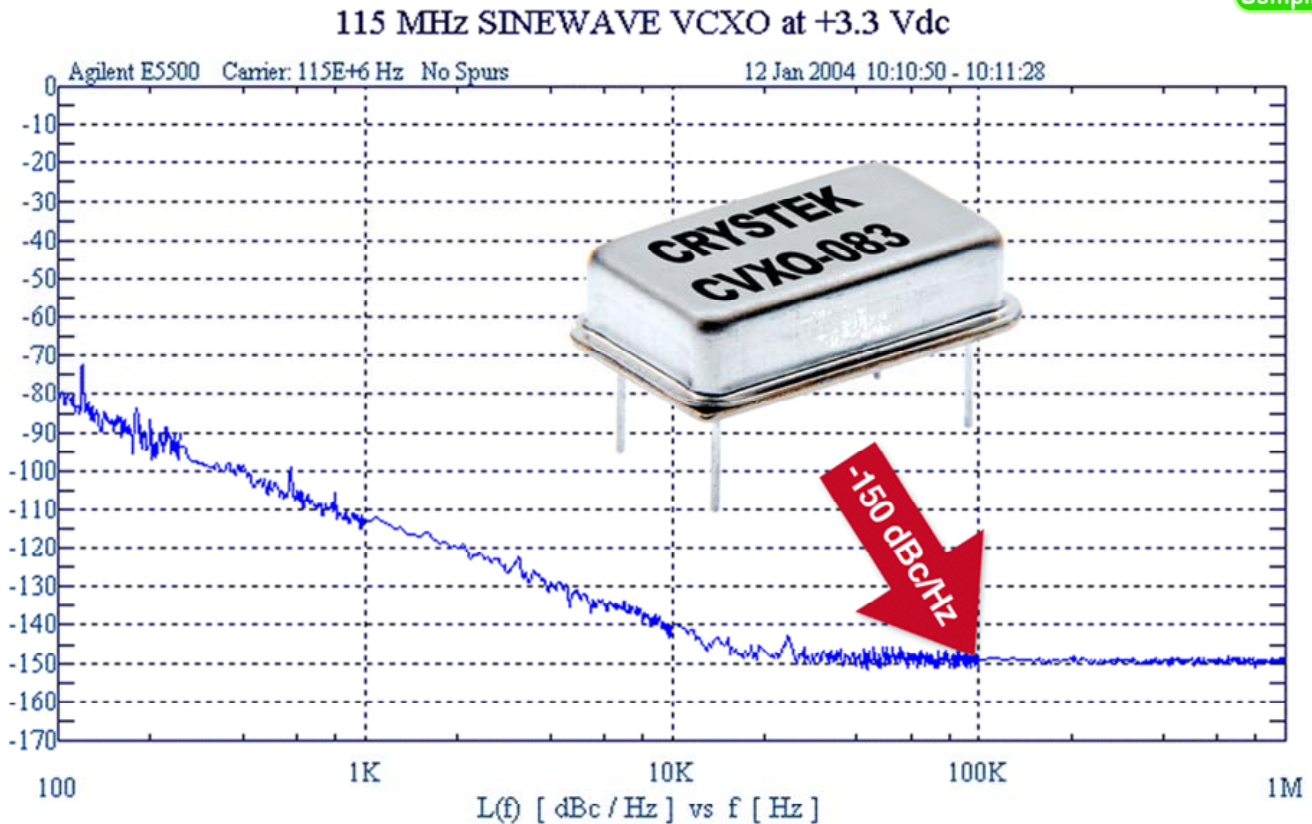

Model CCO-083/085 (Clock Version) and CVXO-083/085 (VCXO Version) generate frequencies from 10 MHz to 200 MHz. This low current sinewave oscillator provides -150 dBc/Hz noise floor while only consuming 8mA typical. Output level is 0dBm Min into 50 ohms, and harmonics are lower than -20 dBc. The series has no sub-harmonics due to the use of Inverted Mesa (High Frequency Fundamental Crystal) technology. The oscillator is offered in an extended operating temperature range (-40°C to +85°C), also available in 3.3V and 5V models. Applications include low current applications and sources for driving PLLs and Mixers.

Rev: K
Date: 19-Jan-2017
Page 1 of 2

True Sinewave Clock Oscillators and Voltage Controlled Crystal Oscillators



Frequency Range:

10.000 MHz to 200.000 MHz

Temperature Range:

0°C to +70°C
-40°C to +85°C

(Option X)

Storage:

-45°C to 90°C

(Option 3)

(Option 5)

Input Current:

8mA Typical, 15mA Max @ 3.3V
12mA Typical, 20mA Max @ 5.0V

Output:

True Sinewave

Load:

50 Ω

Power (std):

0 dBm Min into 50 Ω

(Option B)

+3 dBm Min into 50 Ω

(Option C)

+5 dBm Min into 50 Ω

(Option D)

+7 dBm Min into 50 Ω

Harmonics:

-20 dBc Max

Sub-Harmonics:

None

Enable/Disable:

None

Phase Noise Floor:

-150dBc Typical

Aging:

<3ppm 1st year, <1ppm thereafter

CCO-083/085 Options Temperature Range:

0°C to +70°C (±25ppm Max)
-40°C to +85°C (±50ppm Max)

CVXO-083/085

Frequency Pulling:

±50ppm APR Min

Control Voltage

(083): 1.65V ±1.65V

(085): 2.5V ±2.0V

Settability

(083): 1.65V ±0.25V

(085): 2.5V ±0.5V

Linearity:

±10% Max

Phase Noise Typical:

100 Hz -80 dBc/Hz

1 kHz -112 dBc/Hz


10 kHz -140 dBc/Hz

100 kHz -150 dBc/Hz

Part Number Example


CCO-083-100.000 = 3.3V, 0°C to +70°C (±25ppm), 100 MHz

CVXO-085XC-100.000 = 5.0V, -40°C to +85°C (±50ppmAPR), +5dBm, 100 MHz

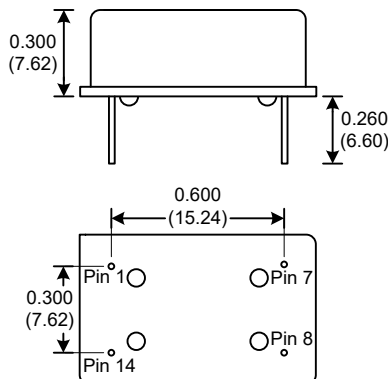

Dimensions inches
(mm)

All dimensions are Max unless otherwise specified.

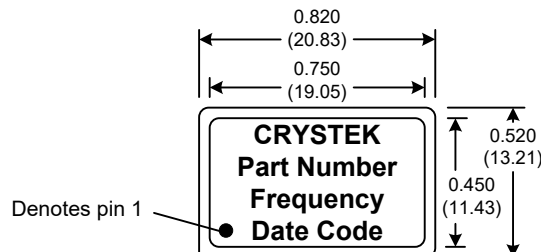

PIN	Connection
1	N/C or Volt Cntrl
7	GND
8	Output
14	Vdd

Rev: K

Date: 19-Jan-2017

Page 2 of 2

Specifications subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#)
[601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#)
[8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#)
[ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#)
[9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#)
[3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-25.000000X](#)