

CCPD-033 5×7mm SMD LVPECL Clock Oscillator

CCPD-033 Model
5×7 mm SMD, 3.3V, LVPECL



Model CCPD-033 is a 77.760 MHz to 161.132800 MHz LVPECL Clock Oscillator operating at 3.3 Volts. The oscillator utilizes a High Q Third Overtone crystal design providing very low Jitter and Phase Noise. No Sub-Harmonics are present in the Output Signal.



5×7mm SMD

Applications:

**Digital Video
SONET/SDH/DWDM
Storage Area Networks
Broadband Access
Ethernet, Gigabit Ethernet**

Rev: Y
Date: 26-Aug-2021
Page 1 of 3



CCPD-033 5×7mm SMD LVPECL Clock Oscillator



CCPD-033 Model


5×7 mm SMD, 3.3V, LVPECL

Frequency Range:
Frequency Stability Options(ppm):
Temperature Range:
 (Option M)
 (Option X)
Storage:
Input Voltage:
Input Current:
Standby Current:
Output:
 Symmetry:
 Rise/Fall Time:
 Output Drive Capability (see Note 1)
Logic:
 Temp. 0°C to 85°C
 Temp. -40°C to 0°C
 Disable Time:
 Start-up Time:
 Phase Jitter: 12kHz~80MHz
 Phase Noise: (See Plot Below)
 Sub-harmonics:
 Aging:

77.760 MHz to 161.132800 MHz
 ±20, ±25, ±50, ±100
 (standard) 0°C to +70°C
 -20°C to +70°C
 -40°C to +85°C
 -45°C to 90°C
 3.3V ± 0.3V
 55mA Typical, 88mA Max
 30uA Max
 Differential LVPECL
 45/55% Max @ zero crossing point
 1ns Max (20% to 80%)
 Zero Impedance Bipolar Process
 Terminated to Vdd-2V into 50 Ω
 “0”=1.490 Min, 1.680 Max
 “1”=2.275 Min, 2.420 Max
 “0”=1.470 Min, 1.745 Max
 “1”=2.215 Min, 2.420 Max
 200ns Max
 2ms Max
 0.5ps Typical, 1ps RMS Max
 None
 <3ppm 1st year, <1ppm every year thereafter

Note 1:

Internal Driver will change to Finite Impedance CMOS Process. Consult factory for additional details and changeover date.

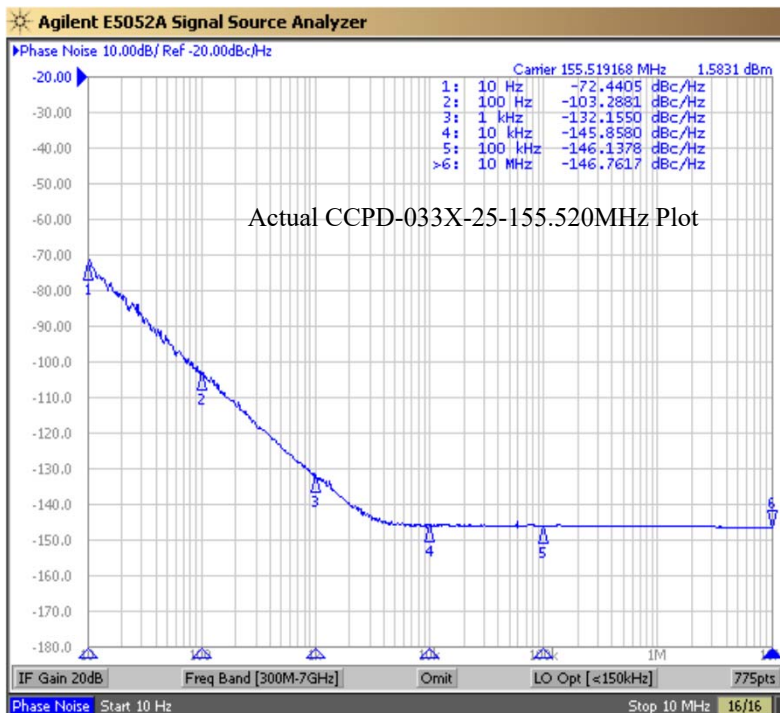



Rev: Y
 Date: 26-Aug-2021
 Page 2 of 3

CCPD-033 Model
5×7 mm SMD, 3.3V, LVPECL




Crystek Part Number Guide													
CCPD - 033 X - 25 - 155.520													
#1	#2 #3 #4 #5												
#1 Crystek LVPECL Osc. #2 Model 033 #3 Temp Range: Blank = 0/70°C, M = -20/70°C, X = -40/85°C #4 Stability: (see Table 1) #5 Frequency in MHz: 3 or 6 decimal places													
Example: CCPD-033X-25-155.520 3.3V, -40/85°C, ±25ppm, 155.520 MHz													
<table border="1"> <thead> <tr> <th colspan="2">Stability Indicator</th> </tr> </thead> <tbody> <tr> <td>Blank</td> <td>± 100ppm</td> </tr> <tr> <td>50</td> <td>± 50ppm</td> </tr> <tr> <td>25</td> <td>± 25ppm</td> </tr> <tr> <td>20*</td> <td>± 20ppm</td> </tr> <tr> <td colspan="2">*not available in -40/85</td> </tr> </tbody> </table>		Stability Indicator		Blank	± 100ppm	50	± 50ppm	25	± 25ppm	20*	± 20ppm	*not available in -40/85	
Stability Indicator													
Blank	± 100ppm												
50	± 50ppm												
25	± 25ppm												
20*	± 20ppm												
*not available in -40/85													
Table 1													


Mechanical:	
Shock:	MIL-STD-883, Method 2002, Condition B
Solderability:	MIL-STD-883, Method 2003
Vibration:	MIL-STD-883, Method 2007, Condition A
Solvent Resistance:	MIL-STD-202, Method 215
Resistance to Soldering Heat:	MIL-STD-202, Method 210, Condition I or J
Environmental:	
Thermal Shock:	MIL-STD-883, Method 1011, Condition A
Moisture Resistance:	MIL-STD-883, Method 1004

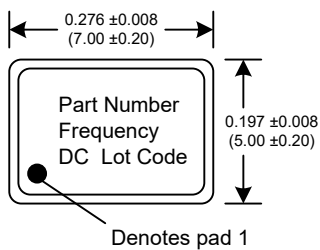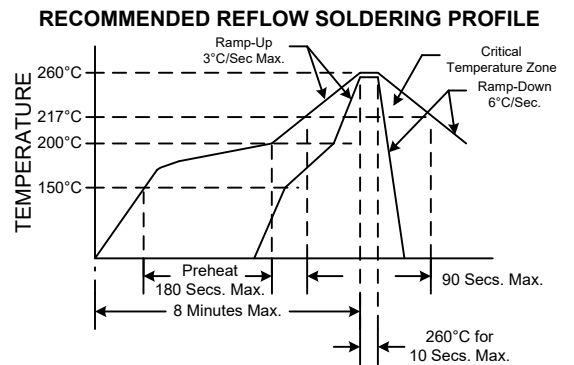


Dimensions inches (mm)
All dimensions are Max unless otherwise specified.

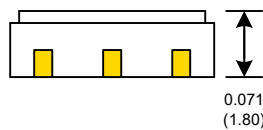

Enable/Disable	
Function pin 1	Output pin
Open or N/C	Active
"1" level 0.7×V _{dd} Min	Active
"0" level 0.3×V _{dd} Max	High Z

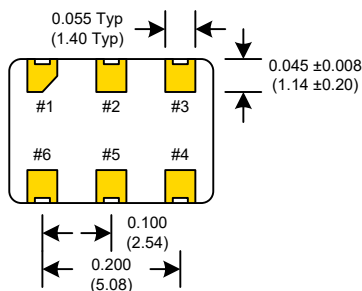

SUGGESTED PAD LAYOUT

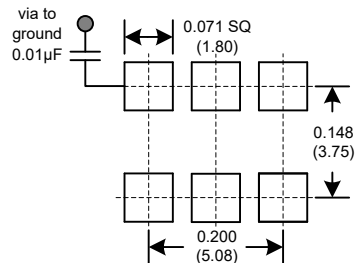

0.01µF Bypass Capacitor Recommended

PIN	Connection
1	Enable/Disable
2	N/C
3	GND
4	Output
5	Comp Output
6	V _{cc}

Rev: Y
Date: 26-Aug-2021
Page 3 of 3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-25.000000X](#)