



CRYSTEK
MICROWAVE
 A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ LOW LOSS RF
 COAX CABLE ASSEMBLIES
 2.92mm(K) AND SMA
 STAINLESS STEEL
 CONNECTORS**



26.5 GHz Low Loss Coaxial Cables

Features:

- Strain Relief:** Heavy duty adhesive strain relief
- Center Conductor:** Silver-plated solid copper
- Inner Braid:** Flat silver-plated copper strip
- Outer Braid:** PC (Round Silver-Plated Copper Braid)
- Dielectric:** Low density microporous PTFE (Polytetrafluoroethylene)
- Jacket:** FEP (Fluorinated Ethylene Propylene)
- Cable Outer Diameter:** 0.205" (5.21mm)
- Connectors:** SST, corrosion-resistant 303 stainless steel per ASTM-A582 (Passivated finish per SAE-AMS-2700)
- Center Pin:** GPBC (Gold-Plated Beryllium Copper)
- Jacket Color:** Grey
- Operating Temperature:** -40°C to +85°C

Minimum Bend Radius: 1.1"


Custom Lengths Available

- Connector Corrosion (salt spray):** MIL-STD-202, method 101, test cond. B 5% salt solution.
- Connector Durability:** 500 connections Minimum

Electrical Specifications:

- Impedance:** 50 Ohms
- Frequency:** Up to 26.5 GHz
- Insertion Loss:** <0.5 dB/ft at 26.5 GHz
- VSWR:** <1.35 to 26.5 GHz
- Max Operating Voltage:** 500V RMS
- Nominal Capacitance:** 27.0 pF/ft
- Velocity of Propagation:** 76%
- Shield Effectiveness:** Greater than 90 dB
- Attenuation (dB/ft):** 0.05 Max at 500 MHz
 0.11 Max at 2 GHz
 0.30 Max at 12 GHz
 0.38 Max at 18 GHz
 0.50 Max at 26.5 GHz

*connector loss not included

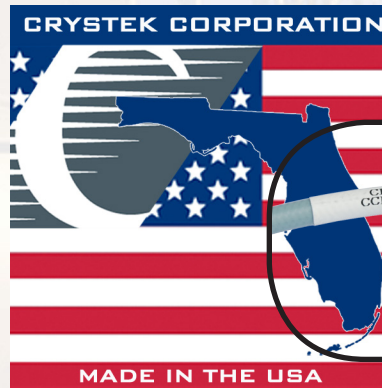

Electrical Test Data Supplied With Each Cable Assembly

2.92mm(K) / 2.92mm(K) [Straight/Straight]

Part Number	Description	Length
CCK26.5-MM-190-30	26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	30"
CCK26.5-MM-190-36	26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	36"
CCK26.5-MM-190-39.4	26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	39.4"
CCK26.5-MM-190-48	26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	48"

SMA / SMA [Straight/Straight]

Part Number	Description	Length
CCSMA26.5-MM-190-30	26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	30"
CCSMA26.5-MM-190-36	26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	36"
CCSMA26.5-MM-190-39.4	26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	39.4"
CCSMA26.5-MM-190-48	26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	48"





12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
 PHONE: 239-561-3311 • 800-237-3061 Rev.: C
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ LOW LOSS RF
COAX CABLE ASSEMBLIES
2.92mm(K) AND SMA
STAINLESS STEEL
CONNECTORS**

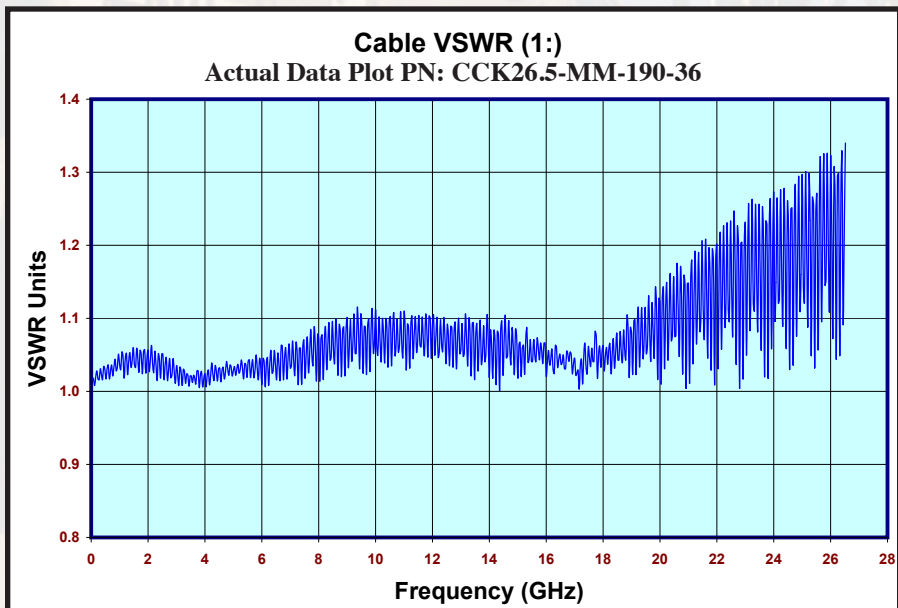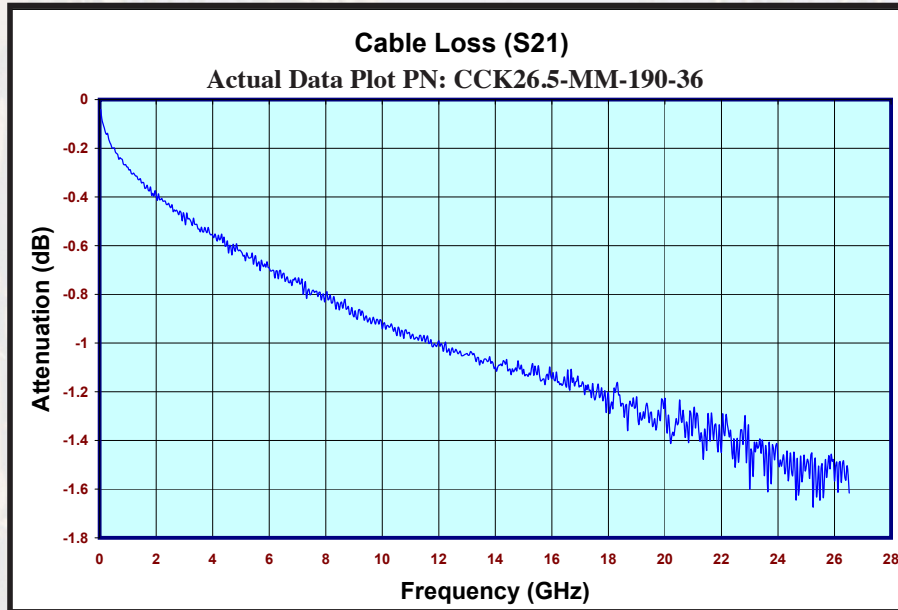



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ LOW LOSS RF
COAX CABLE ASSEMBLIES
2.92mm(K) AND SMA
STAINLESS STEEL
CONNECTORS**

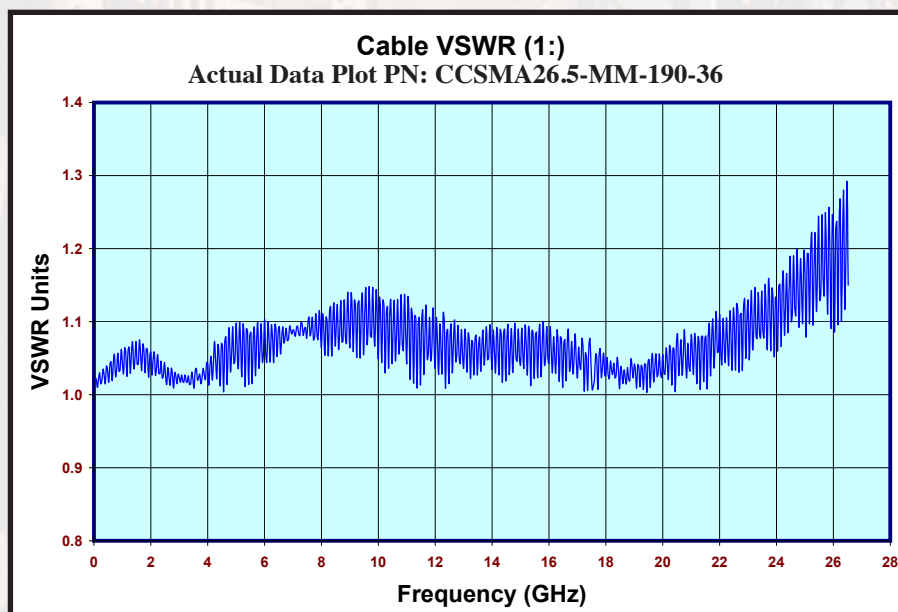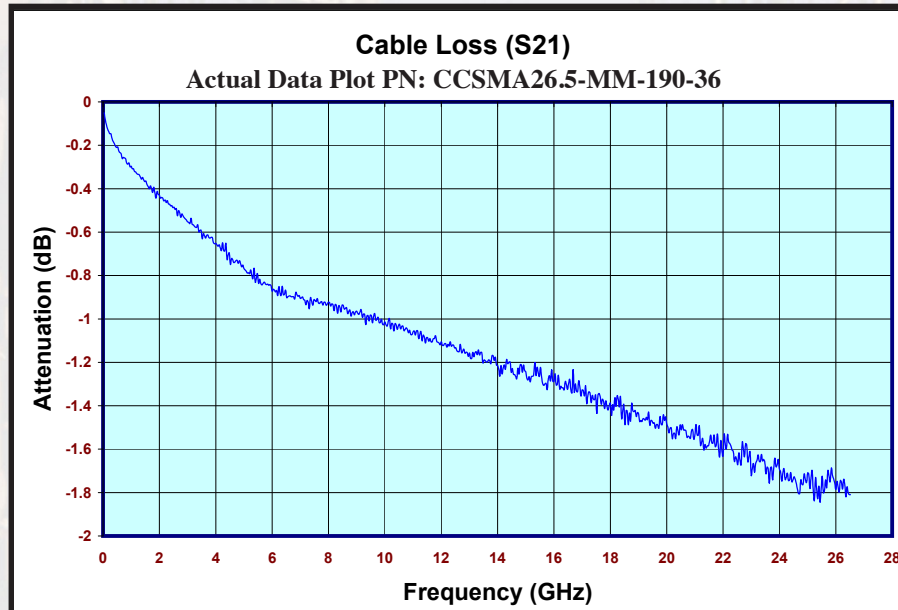

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)