



CRYSTEK
MICROWAVE
 A DIVISION OF CRYSTEK CORPORATION

12 GHz HAND FORMABLE .086 COAX CABLES




50 Ohm DC-12 GHz Hand Formable Coaxial Cables

Features:

- Center Conductor:** Silver-plated copper clad steel wire
- Outer Braid:** Tin-soaked copper braid, 100% coverage
- Insulation:** PTFE (Polytetrafluoroethylene) dielectric
- Cable Outer Diameter:** 0.086" (2.2mm)
- Connectors:** Gold-plated brass
- Center Pin:** Gold-plated brass
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 0.24" (6mm) single bend
 0.99" (25mm) multiple bends

Electrically Matched Pairs Available

PN: CCSMA-MM-086-3
 INSERTION LOSS

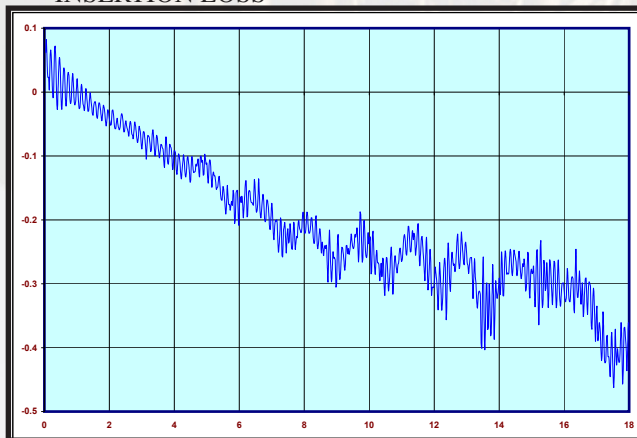

Electrical Specifications:

- Impedance:** 50 Ohms
- Frequency:** DC to 12 GHz
- Insertion Loss:** <0.82 dB/ft at 12 GHz
- VSWR:** <1.3, DC to 12 GHz
- Nominal Capacitance:** 28.6 pF/ft
- Velocity of Propagation:** 70%
- Break Down Voltage:** 1.5KV rms
- Shield Effectiveness:** Greater than 130 dB
- Attenuation (dB/ft):** 0.30 Typical at 2 GHz
 *connector loss not included 0.46 Typical at 4 GHz
 (refer to actual cable 0.70 Typical at 8 GHz
 plot (below) 0.76 Typical at 10 GHz
 0.82 Typical at 12 GHz
- Max Power in (Watts):** 253 @ 400 MHz
 *as specified at 40°C, sea level 157 @ 1 GHz
 47 @ 10 GHz

- Applications:** Jumpers
 Instrumentation
 High Frequency Interconnects



SMA / SMA [Straight/Straight]

Part Number	Description	Length
CCSMA-MM-086-3	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	3"
CCSMA-MM-086-4	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	4"
CCSMA-MM-086-5	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	5"
CCSMA-MM-086-6	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	6"
CCSMA-MM-086-7	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	7"
CCSMA-MM-086-8	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	8"
CCSMA-MM-086-10	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	10"
CCSMA-MM-086-12	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	12"
CCSMA-MM-086-18	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	18"
CCSMA-MM-086-24	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	24"



CRYSTEK
 CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
 PHONE: 239-561-3311 • 800-237-3061 Rev.: 1
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 11-24-17

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)