


Ultra-Low Phase Noise SAW Clock

Frequency Range:

245.760 MHz to 1100 MHz

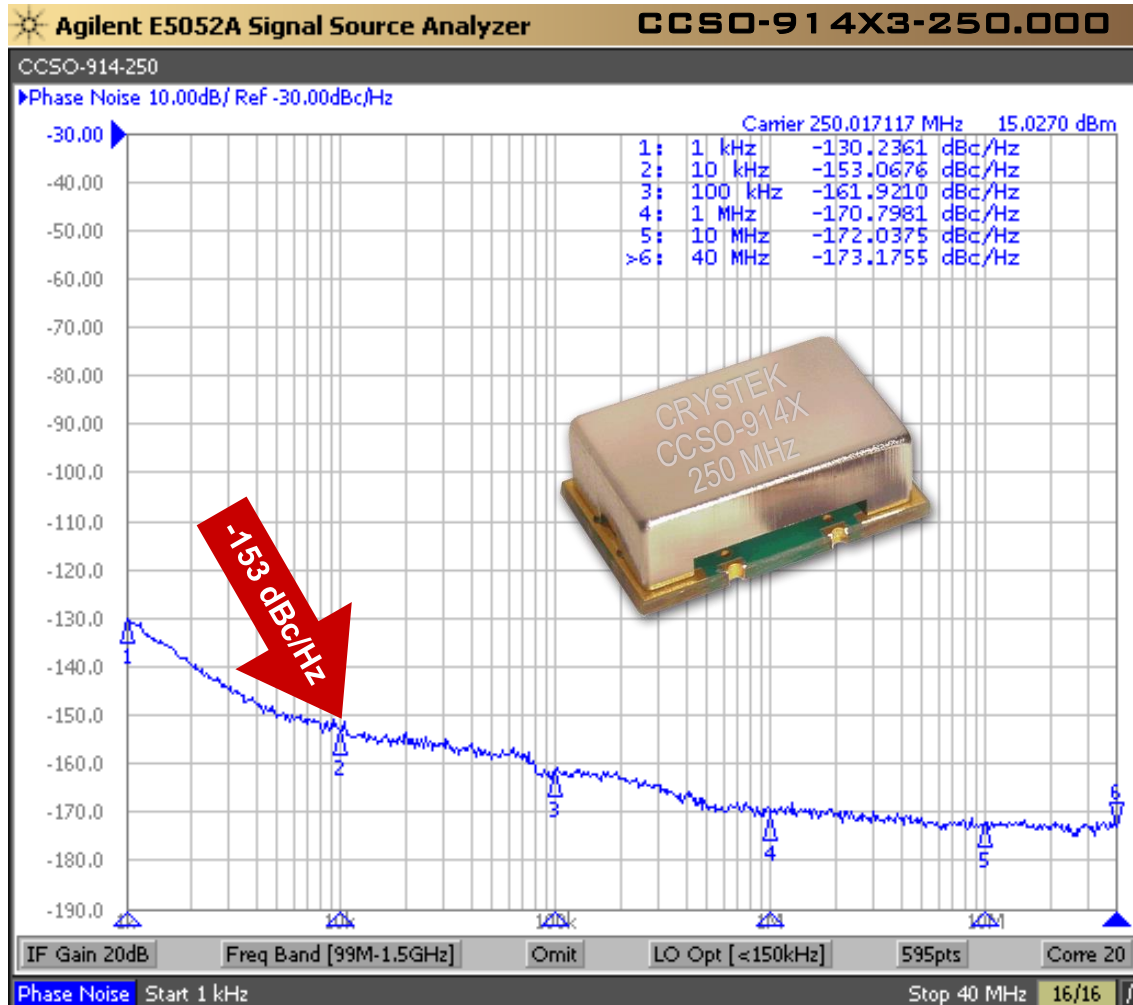

Model CCSO-914X is a SAW (surface acoustic wave) Clock Oscillator (CCSO). SAW crystal technology provides low-noise and low-jitter performance with true sinewave output. Features include -145 dBc/Hz phase noise at 10 kHz offset at 1 GHz, 3.3V & 5V input voltage available, -40°C to +85°C operating temperature, FR5 PCB and 9×14 mm SMT package. The oscillator has no sub-harmonic and the second harmonic is typically -20 dBc.

Applications include:

Analog to Digital Converters (A/D Converters), System Clock for Network Clock Generator/Synchronizer, Clock for DDS, Test and Measurement, Avionics, Point-to-Point Radios, and Multi-point Radios.

Rev: AA
Date: 24-Apr-2023
Page 1 of 5

CCSO-914X
True SineWave
SAW Based Clock Oscillator
9x14mm SMD
3.3 & 5.0 Volt



Frequency Range:	245.760 MHz to 1100 MHz
Temperature Range:	-40°C to +85°C
Storage:	-45°C to 90°C
Input Voltage:	(option 3) 3.3V ± 0.165V
	(standard) 5.0V ± 0.25V
Frequency vs Temperature (Typical):	±200ppm (-40/85)
	±150ppm (0/70)
Input Current:	25mA Typical, 45mA Max
Output:	True SineWave
Output Power:	(3.3V) +5dBm Min into 50 Ω Load
	(5.0V) +8dBm Min into 50 Ω Load
Start-Up Time:	2ms Typical, 10ms Max
2nd Harmonic:	-20dBc Typical, -15dBc Max
Sub-Harmonics:	None





Phase Noise Typical @ 1 GHz:

1kHz	-116 dBc/Hz
10kHz	-145 dBc/Hz
100kHz	-168 dBc/Hz
1MHz	-170 dBc/Hz
10MHz	-171 dBc/Hz

G-sensitivity:


0.9×10⁻⁹ per g

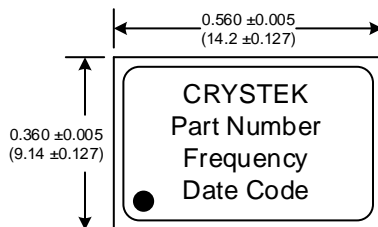


Package Height Options

	inches	mm
Standard	0.210	5.33
Option L	0.135	3.43

Table A

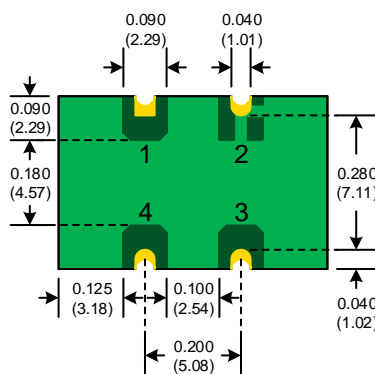

SUGGESTED PAD LAYOUT



PAD FINISH: Immersion Gold (ENIG); 5 micro inches maximum

Pad	Connection
1	N/C
2	GND
3	Output
4	Vdd

Rev: AA

Date: 24-Apr-2023

Page 2 of 5



CCSO-914X
True SineWave
SAW Based Clock Oscillator
9×14mm SMD
3.3 & 5.0 Volt

Crystek Part Number Guide



CCSO - 914X 3 L - 1000.000
#1 #2 #3 #4 #5

- #1 Crystek Saw Osc.
- #2 Model 914 with -40/85°C Temperature Range
- #3 (3 = 3.3Volts) (Blank = 5 Volts)
- #4 Height (L = 0.135") (Blank = 0.210")
- #5 Frequency in MHz: 3 or 6 decimal places

Available Frequencies (MHz):
245.760 500.000 916.000
250.000 622.080 1000.000
433.920 800.000

Custom Frequencies Available with NRE Fee

Similar Product in 5×7.5mm Package
[Click Here](#)

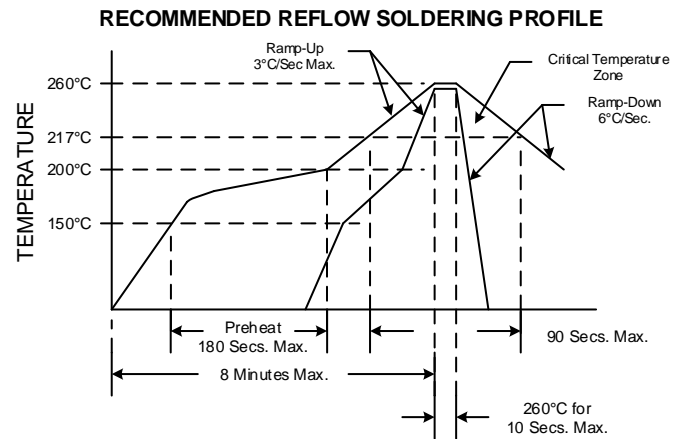
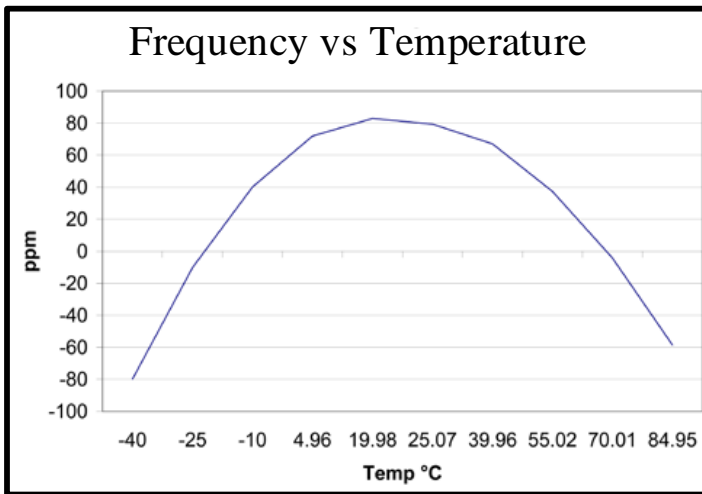


NOTE: Reflow Profile with 240°C peak also acceptable.

Parameter	Conditions
Mechanical Shock	MIL-STD-883, Method 2002, Condition B
Mechanical Vibration	MIL-STD-883, Method 2007, Condition A
Solderability	MIL-STD-883, Method 2003
Solvent Resistance	MIL-STD-202, Method 215
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition I or J
Thermal Shock	MIL-STD-883, Method 1011, Condition A
Moisture Resistance	MIL-STD-883, Method 1004


Rev: AA
Date: 24-Apr-2023
Page 3 of 5

CCSO-914X
True SineWave
SAW Based Clock Oscillator
9x14mm SMD
3.3 & 5.0 Volt

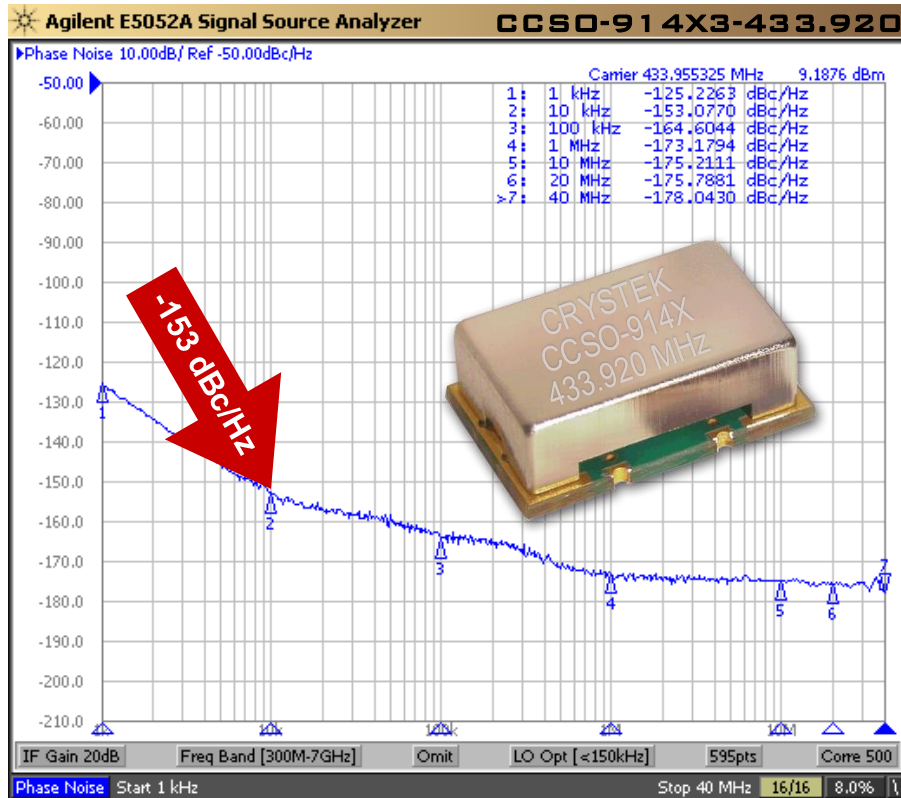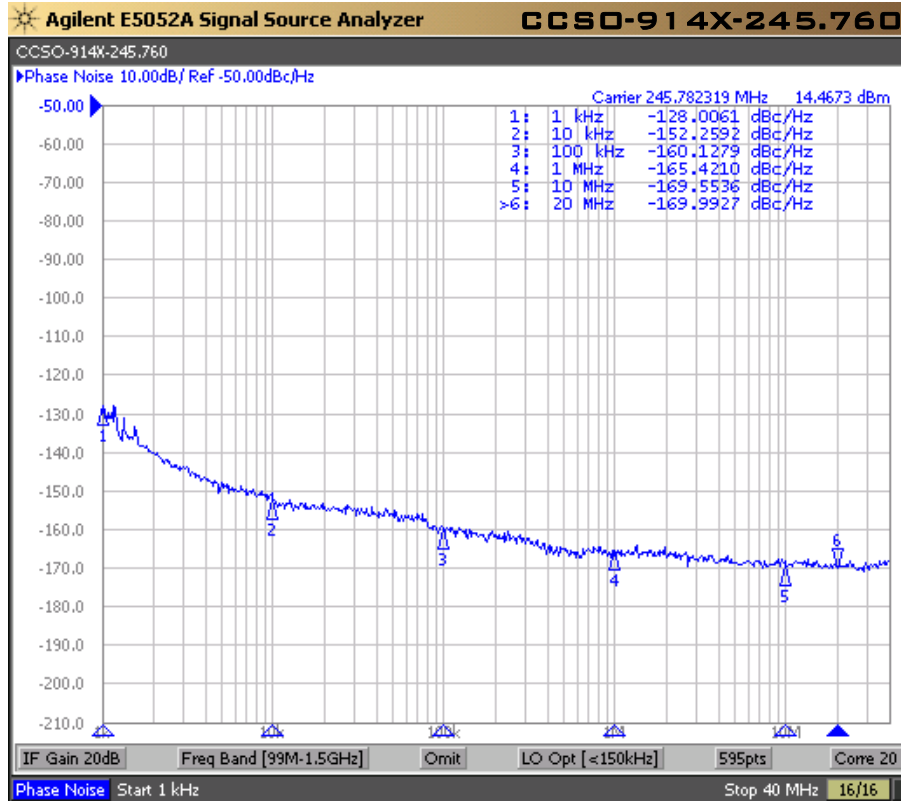

Rev: AA
Date: 24-Apr-2023
Page 4 of 5

CCSO-914X
True SineWave
SAW Based Clock Oscillator
9x14mm SMD
3.3 & 5.0 Volt

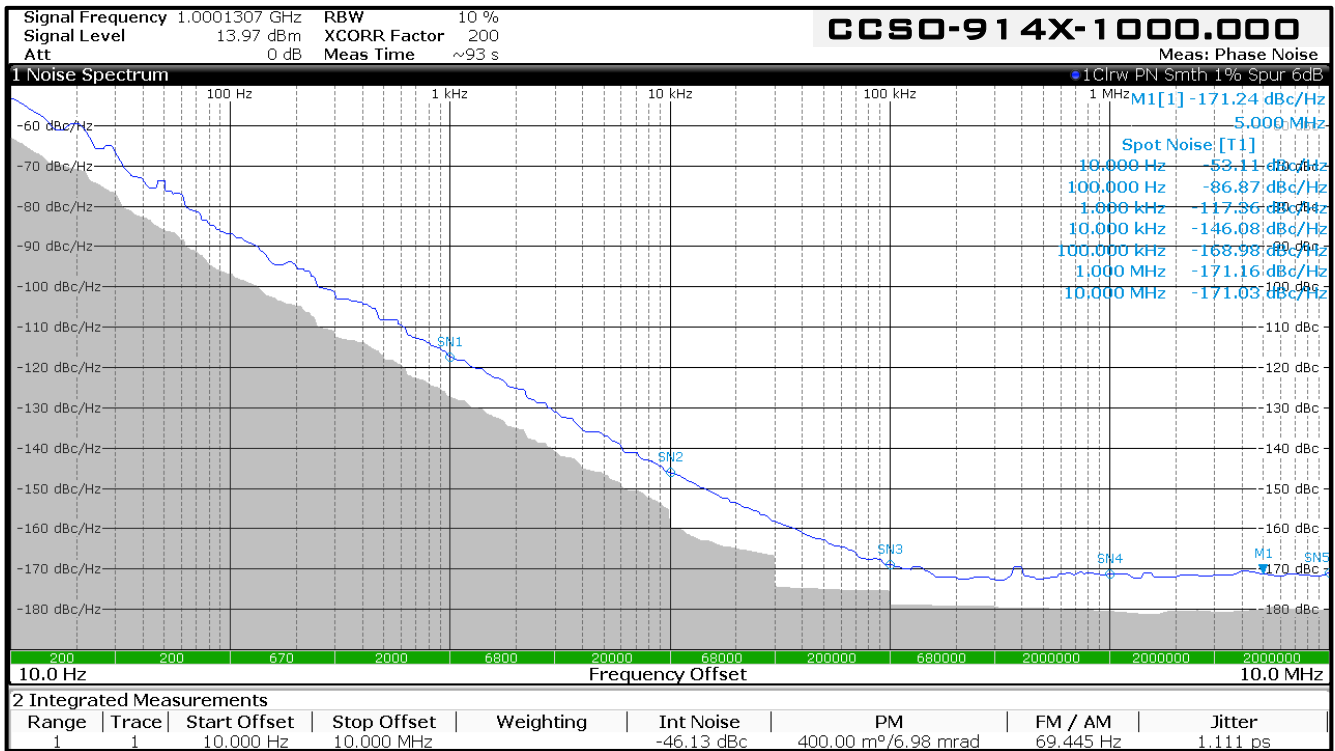

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SAW Oscillators](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[XG-2102CA 100.0000M-LGPAL3](#) [XG-2102CA 156.2500M-LGPAL3](#) [CCSO-914XL-500.000](#) [XG-2102CA 125.0000M-PHPA](#) [EG-2121CA 100.0000M-LHPAB](#) [EG-2121CA 125.0000M-LGPNB](#) [EG-2121CA 125.0000M-LHPAB](#) [EG-2121CA 125.0000M-PHPAL3](#) [CVCSO-914-1000](#) [CCSO-914X-250.000](#) [CCSO-914X3-1000](#) [CVCSO-914XL-1000.000](#) [S1614E-25.0000\(T\)](#) [EG-2121CA 100.0000M-LGPAL3](#) [EG-2121CA 125.0000M-LGRNLX](#) [EG-2121CA 125.0000M-LHPAL3](#) [EG-2121CA 200.0000M-LHPAB](#) [EG-2121CA 200.0000M-LHPAL3](#) [EG-2121CA 200.0000M-PHPAL3](#) [EG-2121CA 644.53125M-LGPAB](#) [EG-2121CA 100.0000M-LGPAB](#) [EG-2121CA 212.5000M-PHPAB](#) [EG-2121CA 312.5000M-LGPAB](#) [EG-2121CA 200.0000M-LGPAB](#) [XG-2102CA 312.5000M-LGRN](#) [XG-2102CA 200.0000M-LHPA](#) [VS-705-ECE-KAAN-155M520000](#) [VS-705-ECE-KAAN-983M040000](#) [VS-705-ECE-SAAN-125M000000](#)