


# Crystek SS402 Cable

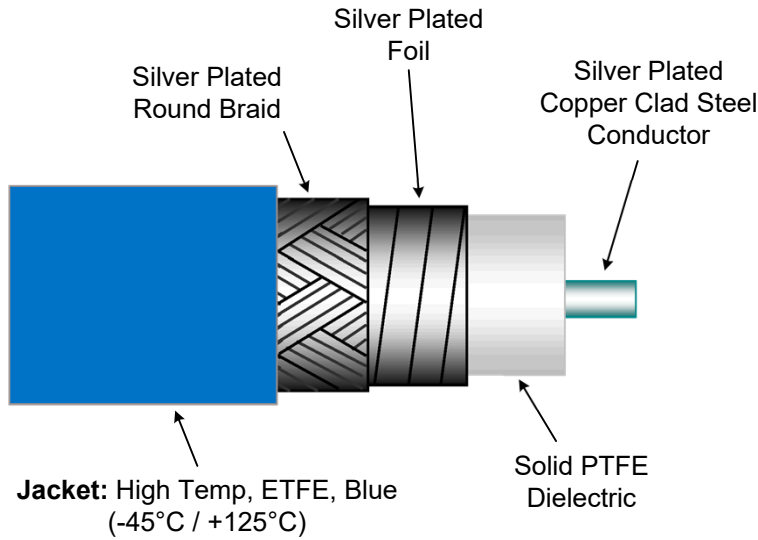

**Printing:** "Crystek SS402 yyww-xx" (spacing 12")

Packaging: 100' and less in bulk coil  
Greater than 100' on reel  
yyww = date code, xx = sequential dash # for each splice (-01, -02, -03, etc.)





Electrical Properties (Cable Only)	
Impedance (Ω)	50
Velocity of Propagation (%)	70
Shielding Effectiveness (dB)	>100
Phase vs. Flexure	Figure 3
Phase vs. Temperature	Figure 4
Min Breakdown Voltage (kV)	8.2
Capacitance (pF/ft)	29
Inductance (nH/ft)	72
Max Operating Freq (GHz)	18.0
Max Structural VSWR	1.25:1

Physical Properties (Cable Only)	
Maximum Temperature (°C)	-65/+125
Recommended Temperature (°C)	-45/+125
High Temp. Jacket Option (in)	0.161
Silver Plated Round Braid O.D. (in)	0.143
Silver Plated Foil O.D. (in)	0.125
Solid PTFE Dielectric O.D. (in)	0.118
Solid Center Conductor (in)	0.036
Inside Min. Bend Radius (in)	0.8
Flexure Life (3× Min. Bend Radius)	>1000
Weight (lbs/ft)	0.028

(This cable series is constructed in accordance with MIL-DTL-17)

Center Conductor: Silver Plated Copper Clad Steel  
 Dielectric: Type F per ASTM D4894 or D4895, Semisolid PTFE (proprietary)  
 Primary Shield: Silver Plated Copper per ASTM B298  
 Second Shield: Silver Plated Copper per ASTM B298  
 High Temp Jacket: Type X per ASTM D3159, ETFE (Flame Resistance and Smoke = UL94 V-0)  
 Outdoor Jacket: Type XII Polyurethane (optional) (Zero Halogen, Flame Resistance and Smoke = UL94 V-0)

Attenuation (dB/100ft) @ 25°C		
Frequency (GHz)	dB/100 ft	K Watts
0.5	7.94	0.92
1.0	11.59	0.62
3.0	21.65	0.36
6.0	32.79	0.22
12.0	50.73	0.15
18.0	66.23	0.12
K1	10.35	
K2	1.24	

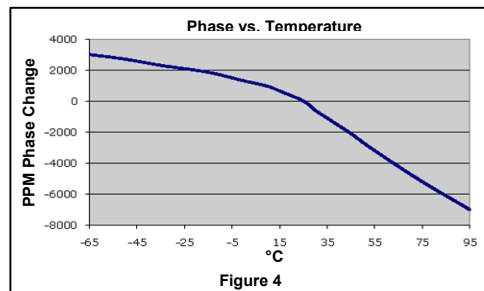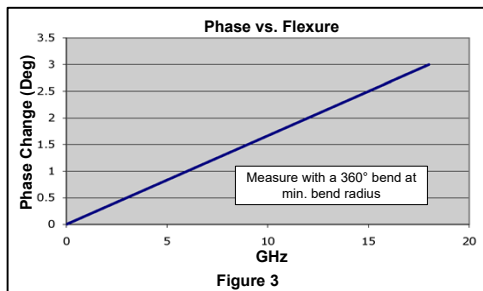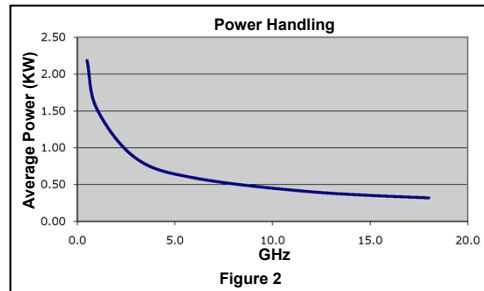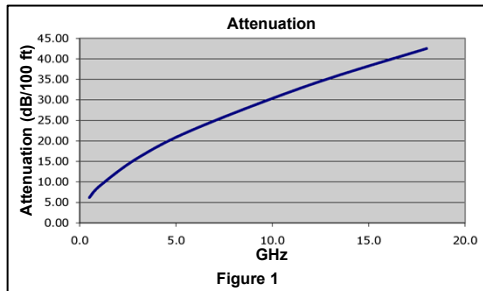

Part Number  
CC-SS402

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Coaxial Cables](#) category:*

*Click to view products by [Crystek](#) manufacturer:*

Other Similar products are found below :

[89880-003-1000](#) [CY2389-000](#) [8221-010-U1000](#) [9116-010-U500](#) [1322R-010-1000](#) [1807A-B59-U1000](#) [2020K8421-9X-CS3417](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [735A1-008-1000](#) [8212-010-U500](#) [480414-000](#) [7915A 009U1000](#) [5024A1311-0](#) [1281S5 010250](#) [1530A 010U1000](#) [9248 010U1000](#) [9244 0101000](#) [1694A 0081000](#) [1190A 0101000](#) [8241F J5C1000](#) [1674A TIN50](#) [7915A 0091000](#) [TRCH-50-2](#) [9066 0031000](#) [7805R 008100](#) [1674A TIN100](#) [9116SB 0101000](#) [9271 0061000](#) [1613A 0101000](#) [1807A B591000](#) [5339Q5 009U500](#) [539945 0091000](#) [9116R 0101000](#) [89207 010100](#) [9058 0101000](#) [8241A 0101000](#) [DA7805R 0101000](#) [C6424](#)