

CCSS-945 Model

9×14 mm SMD, 5.0V, SineWave

Frequency Range:
Frequency Stability Options(ppm)
Temperature Range:
(Option M)
(Option X)

10 MHz to 125 MHz
±20, ±25, ±50
(standard) 0°C to 70°C
-20°C to +70°C
-40°C to +85°C
-45°C to +90°C

Storage:

Input Voltage:
Input Current:

5.0V ± 0.5V
30mA Max

Output:

Output Power:
Start-up time:
Load:

True SineWave
+5 dBm Min, +7 dBm Typical
2ms Typical, 5ms Max
50 ohms

2nd Harmonic:
Sub-harmonics:




-25 dBc Typical
None

Phase Noise Typical:
(@100MHz)


10Hz	-85 dBc/Hz
100Hz	-120 dBc/Hz
1kHz	-145 dBc/Hz
10kHz	-162 dBc/Hz
100kHz	-170 dBc/Hz
1MHz	-170 dBc/Hz

Aging:


<3ppm 1st year, <1ppm every year thereafter

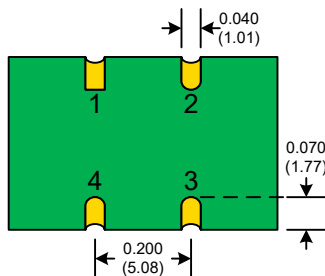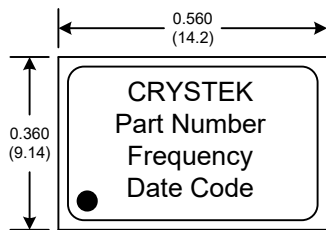

SUGGESTED PAD LAYOUT

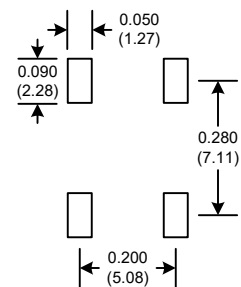

PAD FINISH: Immersion Gold (ENIG); 5 micro inches maximum

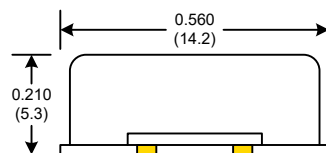

Pad	Connection
1	NC
2	GND
3	OUT
4	Vdd

Rev: H
Date: 28-Mar-2018
Page 1 of 3

Specifications subject to change without notice.

CCSS-945 Model
9×14 mm SMD, 5.0V, SineWave

Crystek Part Number Guide

CCSS - 945 X - 25 - 125.000

#1 #2 #3 #4 #5

#1 Crystek 9×14 SMD SineWave Clock
#2 Model 945 = Ultra Low Noise 5.0V
#3 Temp Range: Blank = 0/70°C, M = -20/70°C, X = -40/85°C
#4 Stability: (see Table 1)
#5 Frequency in MHz: 3 or 6 decimal places

Example:

CCSS-945X-25-100.000
5.0V, -40/85°C, ±25ppm, 100.000 MHz

Stability Indicator

Blank ± 100ppm
50 ± 50ppm
25 ± 25ppm
20* ± 20ppm

*not available in -40/85


Table 1

Standard Frequencies MHz

10.000
50.000
80.000
100.000
122.880
125.000

RECOMMENDED REFLOW SOLDERING PROFILE
900034 (See App Note listed on website)

<http://www.crystek.com/specification/reflow/900034.pdf>

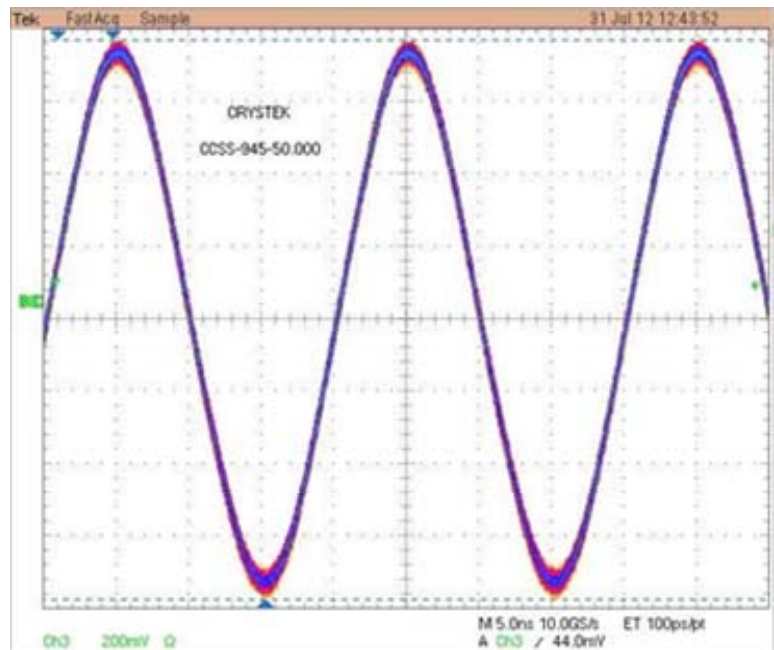

Mechanical:

Shock: MIL-STD-883, Method 2002, Condition B
Solderability: MIL-STD-883, Method 2003
Vibration: MIL-STD-883, Method 2007, Condition A
Solvent Resistance: MIL-STD-202, Method 215
Resistance to Soldering Heat: MIL-STD-202, Method 210, Condition I or J

Environmental:

Thermal Shock: MIL-STD-883, Method 1011, Condition A
Moisture Resistance: MIL-STD-883, Method 1004

Packaging:

Tape/Reel: 100ea, 250ea, 500ea 24mm Tape


Rev: H

Date: 28-Mar-2018


Page 2 of 3




CCSS-945 Model
9x14 mm SMD, 5.0V, SineWave

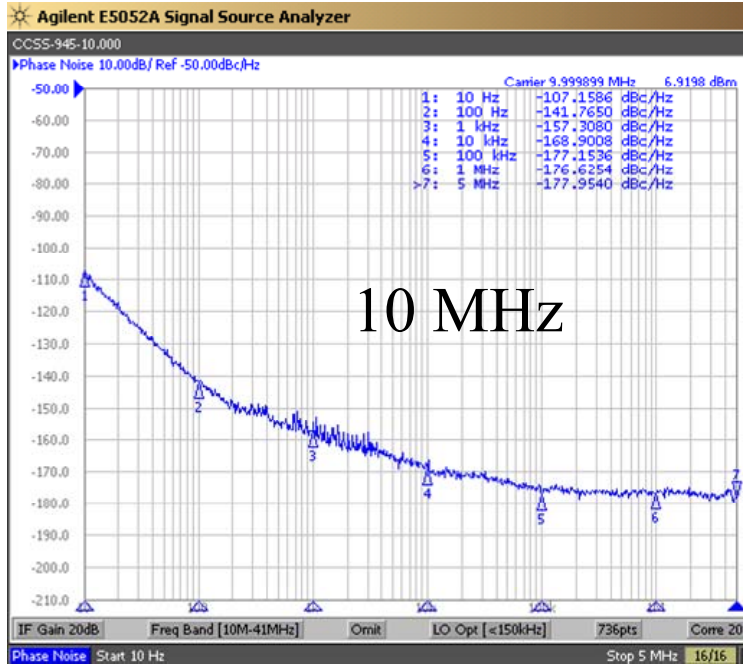

10 MHz

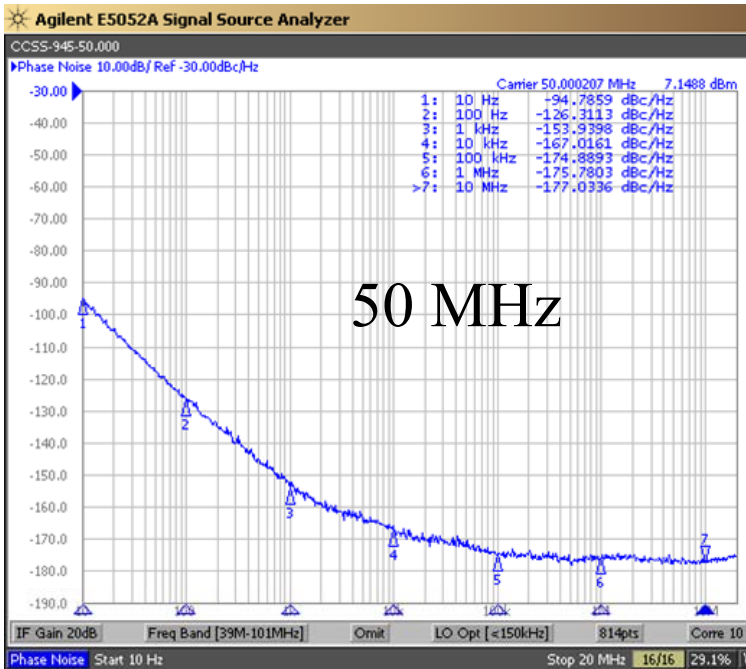

50 MHz

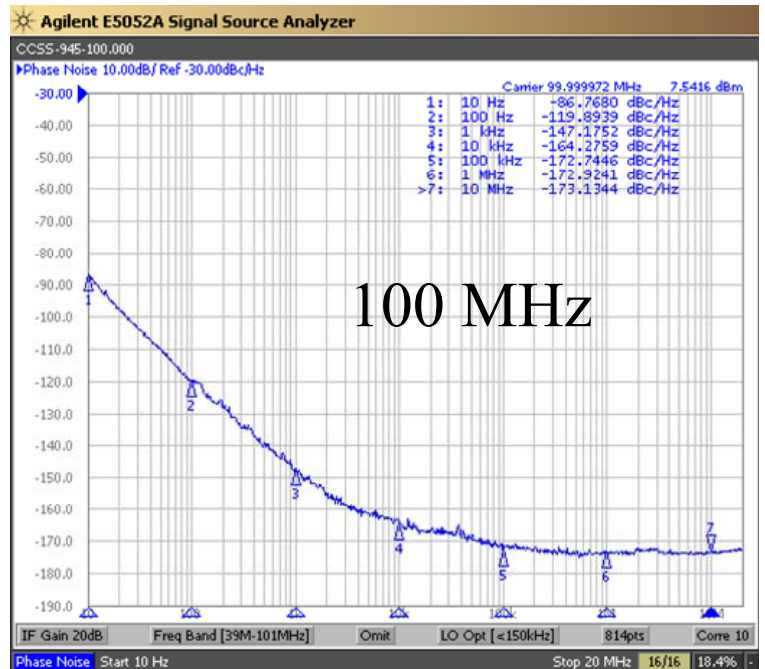

100 MHz

Rev: H
Date: 28-Mar-2018
Page 3 of 3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-25.000000X](#)