



CRYSTEK
CRYSTALS
A DIVISION OF CRYSTEK CORPORATION

POCKET REFERENCE OSCILLATOR

CPRO Series



Actual Size

Crystek's new **PRO** Series, **P**ocket **R**eference **O**scillator is an industry first! A complete HCMOS crystal clock oscillator has been integrated in a rugged SMA housing. Simply connect +3.3Vdc to the female SMA side, and it will output a clean Low Jitter signal from the male SMA side. In effect, each **PRO** is a fixed frequency portable crystal generator. Frequency stability is ± 25 ppm over 0°C to 70°C. Available off the shelf in many standard frequencies (see next page). Perfect for Lab use.



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913

PHONE: 239-561-3311 • 800-237-3061

FAX: 239-561-1025 • WWW.CRYSTEK.COM



CRYSTEK
CRYSTALS
A DIVISION OF CRYSTEK CORPORATION

**POCKET
REFERENCE
OSCILLATOR**

CPRO Series

Temperature Range: 0°C to +70°C
Operating Temp.: -40°C to 85°C
Storage: -45°C to 90°C
Input Voltage: +3.3V ± 0.3V

Input Current:
1.54~34.0MHz 18 mA Max
35.0~50.0MHz 25 mA Max
51.0~69.0MHz 30 mA Max
70.0~156.25MHz 45 mA Max


Rise/Fall Time:
1.54~10.0MHz 5nsec Max @ 20% to 80% Vdd
10.1~30.0MHz 4nsec Max @ 20% to 80% Vdd
30.1~50.0MHz 3nsec Max @ 20% to 80% Vdd
50.1~80.1MHz 2.5nsec Max @ 20% to 80% Vdd
80.1~156.25MHz 2nsec Max @ 20% to 80% Vdd

Output: HCMOS
Symmetry: 45/55% Max @ 50% Vdd
Logic: "0" = 10% Vdd Max
"1" = 90% Vdd Min.

Load: 15pF Typical
Jitter: 12KHz~80MHz 0.5psec Typ., 1psec RMS Max

Part Number	Description
CPRO33-4.000	4.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-5.000	5.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-8.000	8.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-10.000	10.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-12.000	12.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-16.000	16.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-16.384	16.384MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-20.000	20.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-25.000	25.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-30.720	30.720MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-32.768	32.768MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-44.736	44.736MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-45.000	45.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-50.000	50.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-62.500	62.500MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-77.760	77.760MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-80.000	80.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-100.000	100.000MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-106.250	106.250MHz, 3.3V ±25ppm Max(0/70°C)
CPRO33-125.000	125.000MHz, 3.3V ±25ppm Max(0/70°C)

Available Accessories:
Power Supply Banana Plug
SMA to BNC Power Cable
Signal Injection Cable

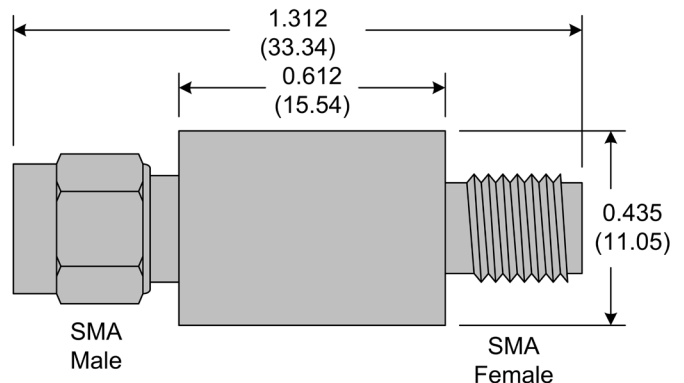

Visit our Website for additional Information
WWW.CRYSTEK.COM



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913

PHONE: 239-561-3311 • 800-237-3061

FAX: 239-561-1025 • WWW.CRYSTEK.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-25.000000X](#)