




Quartz Crystal


Designed to meet the precision and space requirements needed for wireless applications.

CSX1 Model

5x7 mm Low Profile SMD Crystal

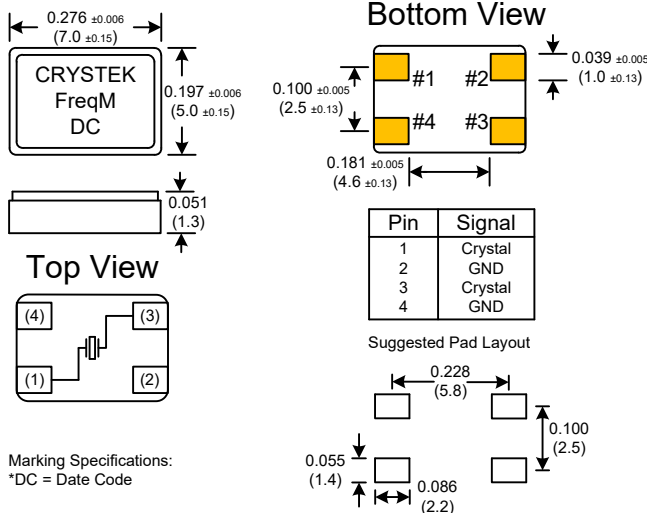

RECOMMENDED REFLOW SOLDERING PROFILE

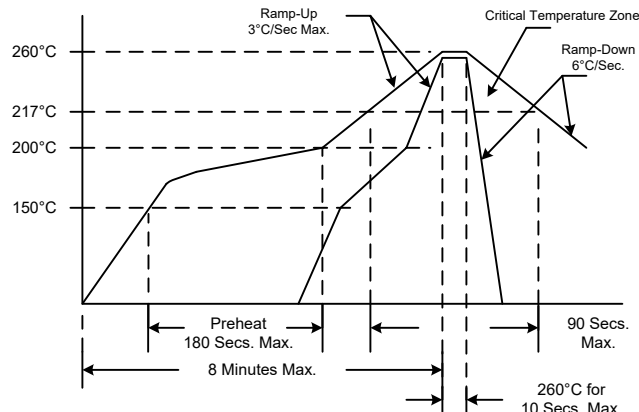

NOTE: Reflow Profile with 240°C peak also acceptable.

Packaging Specifications: 1K ea. Tape and Real

Frequency Range: 8.000 MHz to 50.000 MHz (Fund)
40.000 MHz to 100.000 MHz (3rd OT)

Calibration Tolerance: ±10ppm to ±50ppm

Frequency Stability: ±15ppm to ±100ppm

Operating Temp. Ranges: 0°C to 70°C
-20°C to 70°C
-40°C to 85°C

Storage Temp. Range: -40°C to 85°C

Resistance: See Table 1

Shunt Cap: 5pF Max

Holder Type: 5x7mm SMD

Aging: ±3ppm/1st year Max

Drive level: 50uW Typical, 300uW Max

Motional Capacitance: Not Specified

Spurious Response: Not Specified

C0/C1 Ratio: Not Specified

Pullability: Not Specified


Trim Sensitivity: Not Specified

Temp. Coefficient: Not Specified

Custom Designs Available

Build Your Own P/N

CSX1 - X X X - XX - Freq

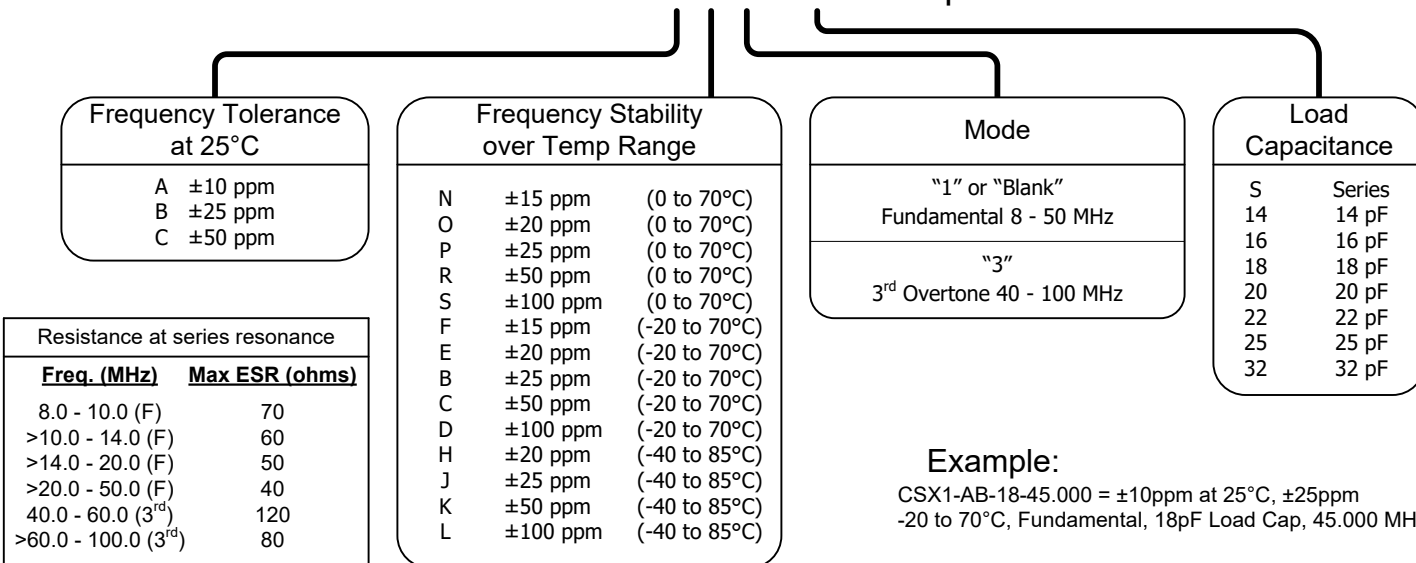

Resistance at series resonance	
Freq. (MHz)	Max ESR (ohms)
8.0 - 10.0 (F)	70
>10.0 - 14.0 (F)	60
>14.0 - 20.0 (F)	50
>20.0 - 50.0 (F)	40
40.0 - 60.0 (3 rd)	120
>60.0 - 100.0 (3 rd)	80

Table 1

Example:

CSX1-AB-18-45.000 = ±10ppm at 25°C, ±25ppm
-20 to 70°C, Fundamental, 18pF Load Cap, 45.000 MHz

Specifications subject to change without notice.

CSX1 Rev. K

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFX TAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [7A-14.31818MBBK-T](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [ABM3-13.52313MHZ-10-B4Y-T](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [ECS-80-18-30-JGN-TR](#) [17000](#)