

Voltage Controlled Crystal Oscillator

CVXO-014S & 014 Models 8 & 14 Pin Dip, 5V, HCMOS/TTL


Frequency Range:	1MHz to 200MHz
Frequency Stability:	±20ppm to ±100ppm
Temperature Range:	See Table 1
Storage:	-45°C to 90°C
Input Voltage:	5V ±0.5V
Control Voltage:	2.5V ±2.0V
Input Current:	100mA Max @ 200MHz
Output:	HCMOS/TTL
Symmetry:	40/60% Max @ 50% Vdd
(Option Y)	45/55% Max
Rise/Fall Time:	4ns Typ, 10ns Max
Control Range:	See Table 2
	(50ppm Min, 150ppm Max Std.)
Output Voltage:	"0" = 10% Vdd Max
	"1" = 90% Vdd Min
Load:	15pF/10TTL Max
Linearity:	±10% Max
Aging:	<3ppm 1st/yr, 1ppm every year thereafter




Designed to meet today's requirements for economical solutions.

****Custom Designs Available**


CVXO-014S

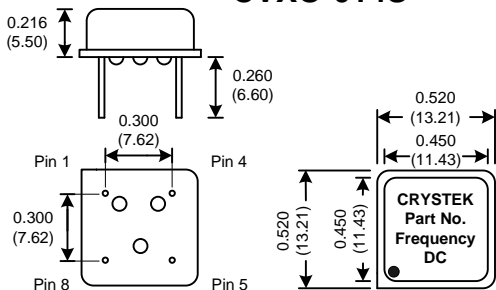

CVXO-014

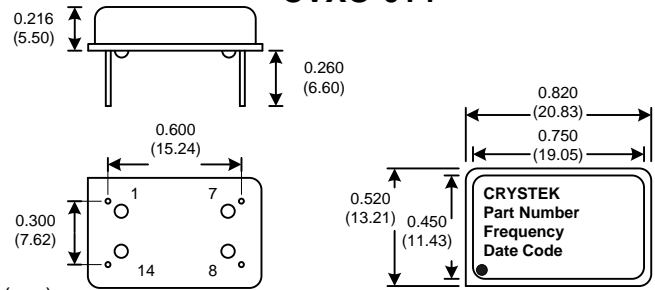

Dimensions inches (mm)
All dimensions are Max unless otherwise specified.

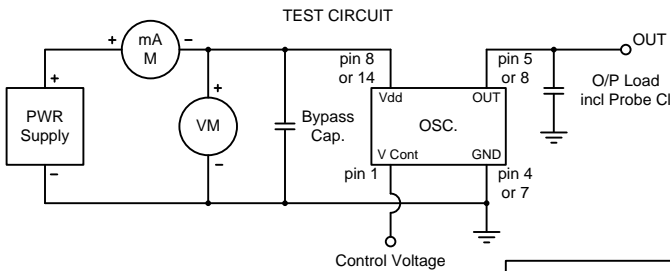

CONTROL RANGE OPTIONS	
A	20ppm Typ, 30ppm Max
B	30ppm Min
C	50ppm Min
D	100ppm Min
E	150ppm Min
F	200ppm Min
G	(STD) 50ppm Min, 150ppm Max
H	150ppm Min, 250ppm Max
I	200ppm Min, 300ppm Max

Operating Temperature	Freq. Stability (± ppm)			
	20	25	50	100
A 0°C to 50°C	20	25	50	100
B -10°C to 60°C	20	25	50	100
C 0°C to 70°C	20	25	50	100
D -10°C to 70°C	20	25	50	100
E -20°C to 70°C		25	50	100
F -30°C to 60°C		25	50	100
G -40°C to 85°C		25	50	100

Table 1

Table 2

Crystek Part Number Guide for 8 pin

CVXO-014S - A A Y - 25 - 44.768

#1	#2	#3	#4	#5	#6	#7
#1 Crystek VCXO	#2 Model	#3 Temp. Range: (see table 1)	#4 Control Range: (see table 2)	#5 Symmetry: (Blank = 40/60, Y=45/55)	#6 Stability: (see table 1, Blank = 100ppm)	#7 Frequency in MHz: 3 or 6 decimal places

Example:
CVXO-014SAAY-25-25.000 = 5.0V VCXO, 0/50°C, ±30ppm Max Pull, 45/55, 25ppm, 25.000 MHz
CVXO-014SED-19.660 = 5.0V VCXO, -20/70, ±100ppm Min Pull, 40/60, 100ppm, 19.660 MHz

Crystek Part Number Guide for 14 pin

CVXO-014 - A A Y - 25 - 44.768

#1	#2	#3	#4	#5	#6	#7
#1 Crystek VCXO	#2 Model	#3 Temp. Range: (see table 1)	#4 Control Range: (see table 2)	#5 Symmetry: (Blank = 40/60, Y=45/55)	#6 Stability: (see table 1, Blank = 100ppm)	#7 Frequency in MHz: 3 or 6 decimal places

Example:
CVXO-014AAAY-25-25.000 = 5.0V VCXO, 0/50°C, ±30ppm Max Pull, 45/55, 25ppm, 25.000 MHz
CVXO-014ED-19.660 = 5.0V VCXO, -20/70, ±100ppm Min Pull, 40/60, 100ppm, 19.660 MHz

TD-02077 Rev.E

Specifications subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [VCXO Oscillators](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[3808AI-DF-33NG-80.0000](#) [SIT3808AI-CF-33EM-50.000000X](#) [603281](#) [YNETHE125](#) [FRSONT019](#) [SiT3701AC-43-33C-10.00000X](#)
[315LB3I1250T](#) [CVSS-945-125.000](#) [VX-501-0245-160M0](#) [CVHD-950-122.880](#) [CVHD-950-80.000](#) [CVHD-950X-100.000](#) [CVPD-920-100.000](#) [ASG-P-V-A-1.000GHZ](#) [ECXV-P37C2M-640.000](#) [CVHD950X-125.000](#) [CVHD-957-22.57920](#) [ECXV-P37C2N-155.520](#) [ECXV-P37C2N-56.000](#) [ECXV-P37C2N-184.320](#) [ECXV-P37C2N-155.000](#) [ECXV-P35C2N-155.520](#) [LFVCXO067515Bulk](#) [ASG-D-V-A-1.000GHZ](#)
[ASG-D-V-A-491.520MHz](#) [CVHD-950-74.25](#) [CVPD-920-74.25](#) [ABLNO-V-92.160MHZ](#) [ABLNO-V-120.000MHZ](#) [ABLNO-V-80.000MHZ](#)
[ABLJO-V-100.000MHZ](#) [ABLJO-V-120.000MHZ](#) [ABLJO-V-122.880MHZ](#) [ABLJO-V-150.000MHZ](#) [ABLJO-V-155.520MHZ](#) [ABLJO-V-200.000MHZ](#) [ABLJO-V-200.000MHZ-T](#) [ABLJO-V-96.000MHZ](#) [ABLNO-V-100.000MHZ](#) [ABLNO-V-100.000MHZ-T2](#) [ABLNO-V-120.000MHZ-T2](#) [ABLNO-V-122.880MHZ](#) [ABLNO-V-125.000MHZ](#) [ABLNO-V-156.250MHZ](#) [ABLNO-V-96.000MHZ](#) [ABLNO-V-96.000MHZ-T2](#) [ABLNO-V-104.000MHZ](#) [ABLNO-V-125.000MHZ-T2](#) [ABLNO-V-155.520MHZ](#) [ASG2-D-V-A-1000.000MHZ](#)