



CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Features

- High isolation 5000 VRMS
- CTR flexibility available see order information
- Extra low coupling capacitance
- DC input with transistor output
- Temperature range - 55 °C to 125 °C
- External creepage distance > 8 mm
- Internal creepage distance > 4.6 mm
- Distances through insulation > 0.4 mm
- Green Package
- Regulatory Approvals
 - UL - UL1577 (E364000)
 - VDE - EN60747-5-5(VDE0884-5)
 - CQC – GB4943.1, GB8898
 - IEC60065, IEC60950


Applications

- Switch mode power supplies
- Computer peripheral interface
- Microprocessor system interface


Description

The CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W, CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W consists of a photo transistor optically coupled to a gallium arsenide Infrared-emitting diode in a 4-lead SOP Package.

Package Outline

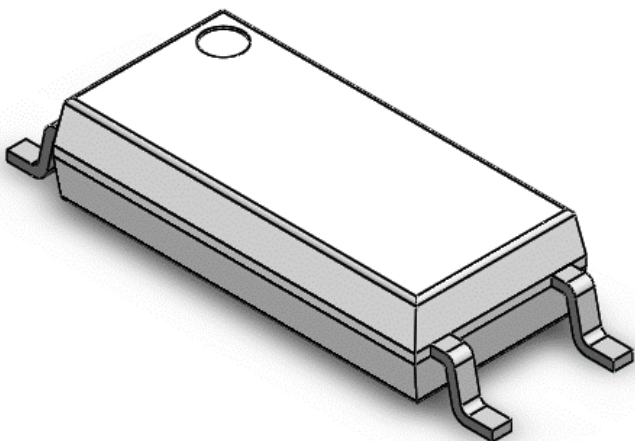

Schematic

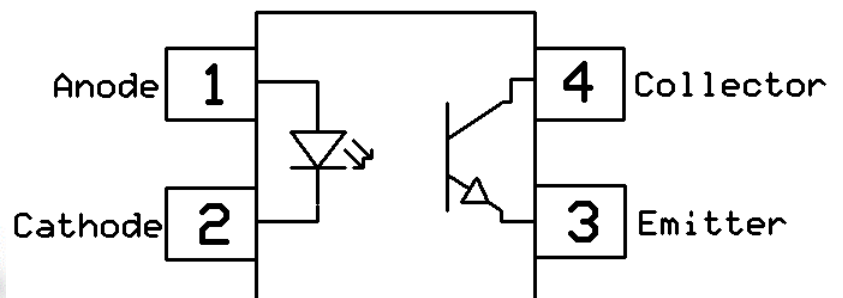



CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W
CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W
DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Absolute Maximum Rating at 25°C

| Symbol | Parameters | Ratings | Units | Notes |
|-----------------------|--|----------------|------------------|--------------|
| V _{ISO} | Isolation voltage | 5000 | V _{RMS} | |
| T _{OPR} | Operating temperature | -55 ~ +125 | °C | |
| T _{STG} | Storage temperature | -55 ~ +150 | °C | |
| T _{SOL} | Soldering temperature | 260 | °C | |
| Emitter | | | | |
| I _F | Forward current | 50 | mA | |
| I _{F(TRANS)} | Peak transient current (≤1μs P.W,300pps) | 1 | A | |
| V _R | Reverse voltage | 6 | V | |
| P _D | Power dissipation | 85 | mW | |
| Detector | | | | |
| P _C | Power dissipation | 150 | mW | |
| B _{VCEO} | Collector-Emitter Breakdown Voltage | 80 | V | |
| B _{VECO} | Emitter-Collector Breakdown Voltage | 7 | V | |
| I _C | Collector Current | 50 | mA | |

Thermal Characteristics

| Symbol | Parameters | Ratings | Units | Notes |
|------------------|-------------------------------------|----------------|--------------|--------------|
| R _{θJA} | Thermal Resistance Junction-Ambient | 445 | °C/W | |
| T _J | Junction temperature | 125 | °C | |



CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W

DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Electrical Characteristics $T_A = 25^\circ\text{C}$ (unless otherwise specified)

Emitter Characteristics

| Symbol | Parameters | Test Conditions | Min | Typ | Max | Units | Notes |
|----------|-------------------|---------------------|-----|------|-----|---------------|-------|
| V_F | Forward voltage | $I_F = 10\text{mA}$ | | 1.26 | 1.4 | V | |
| | | $I_F = 50\text{mA}$ | - | 1.42 | 1.5 | V | |
| I_R | Reverse Current | $V_R = 6\text{V}$ | - | - | 5 | μA | |
| C_{IN} | Input Capacitance | $f = 1\text{kHz}$ | - | 45 | - | pF | |

Detector Characteristics

| Symbol | Parameters | Test Conditions | Min | Typ | Max | Units | Notes |
|---------------|--------------------------------|---|-----|-----|-----|-------|-------|
| $B_{V_{CEO}}$ | Collector-Emitter Breakdown | $I_C = 100\mu\text{A}$ | 80 | - | - | V | |
| $B_{V_{ECO}}$ | Emitter-Collector Breakdown | $I_E = 100\mu\text{A}$ | 7 | - | - | V | |
| I_{CEO} | Collector-Emitter Dark Current | $V_{CE} = 20\text{V}, I_F = 0\text{mA}$ | - | - | 100 | nA | |

Transfer Characteristics

| Symbol | Parameters | Test Conditions | Min | Typ | Max | Units | Notes | | |
|---------------|--------------------------------------|---------------------------------------|---|--|-----|----------|-------|-----|--|
| CTR | Current Transfer Ratio | CT1012-W | $I_F = 1\text{mA}, V_{CE} = 5\text{V}$ | 22 | - | - | % | | |
| | | CT1013-W | | 34 | - | - | | | |
| | | CT1014-W | | 56 | - | - | | | |
| | | CT1011-W | $I_F = 10\text{mA}, V_{CE} = 5\text{V}$ | 60 | - | 300 | | | |
| | | CT1012-W | | 63 | - | 125 | | | |
| | | CT1013-W | | 100 | - | 200 | | | |
| | | CT1014-W | | 160 | - | 320 | | | |
| | | CT1010-W | | $I_F = 5\text{mA}, V_{CE} = 5\text{V}$ | 50 | - | | 600 | |
| | | CT1015-W | | | 50 | - | | 150 | |
| | | CT1016-W | 100 | | - | 300 | | | |
| | | CT1017-W | 80 | | - | 160 | | | |
| | | CT1018-W | 130 | | - | 260 | | | |
| | | CT1019-W | 200 | - | 400 | | | | |
| $V_{CE(SAT)}$ | Collector-Emitter Saturation Voltage | $I_F = 10\text{mA}, I_C = 1\text{mA}$ | - | - | 0.4 | V | | | |
| R_{IO} | Isolation Resistance | $V_{IO} = 500\text{V}_{DC}$ | 5×10^{10} | | | Ω | | | |
| C_{IO} | Isolation Capacitance | $f = 1\text{MHz}$ | | | 1 | pF | | | |



CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Electrical Characteristics $T_A = 25^\circ\text{C}$, $V_{CC} = 5\text{V}$ (unless otherwise specified)

Switching Characteristics

| Symbol | Parameters | Test Conditions | Min | Typ | Max | Units | Notes |
|-----------|---------------|---|-----|-----|-----|---------------|-------|
| T_{ON} | Turn On Time | $I_C = 5\text{mA}$, $V_{CE} = 5\text{V}$, $R_L = 100\Omega$ | - | 4.8 | 22 | μs | |
| T_{OFF} | Turn Off Time | | - | 4.2 | 22 | | |
| t_r | Rise Time | | - | 2.7 | 18 | | |
| t_f | Fall Time | | - | 4 | 18 | | |



CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Typical Characteristic Curves

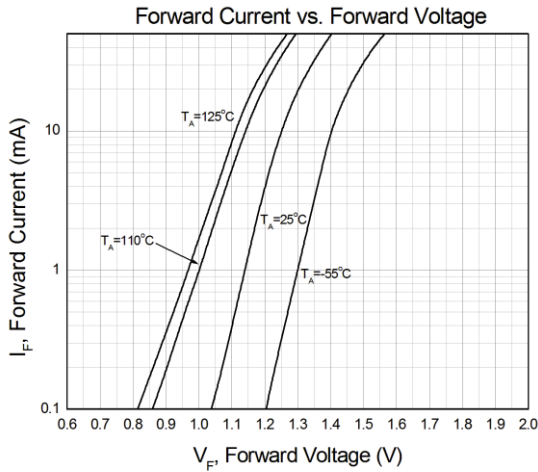


Figure 1

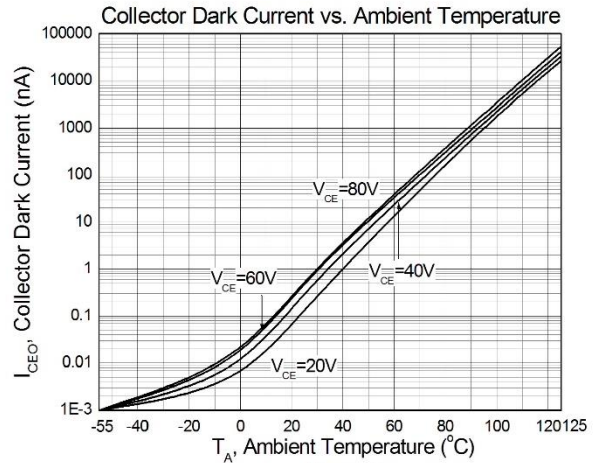


Figure 4

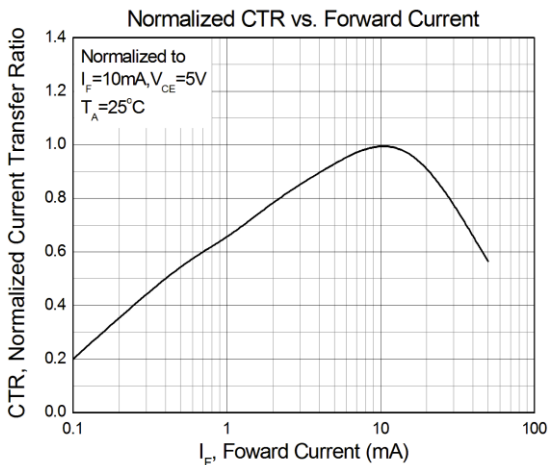


Figure 3

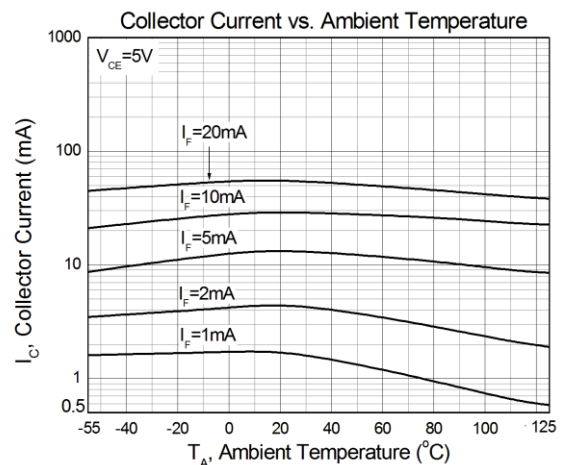


Figure 4

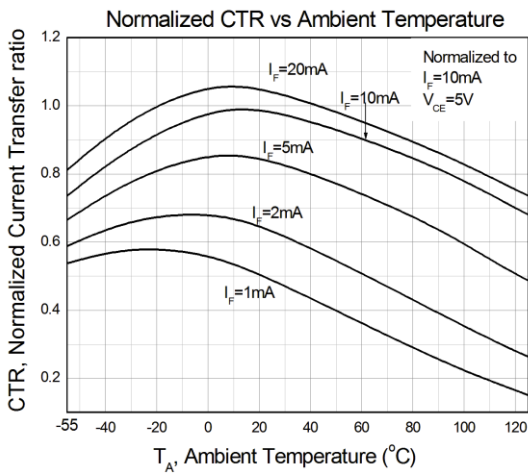


Figure 5





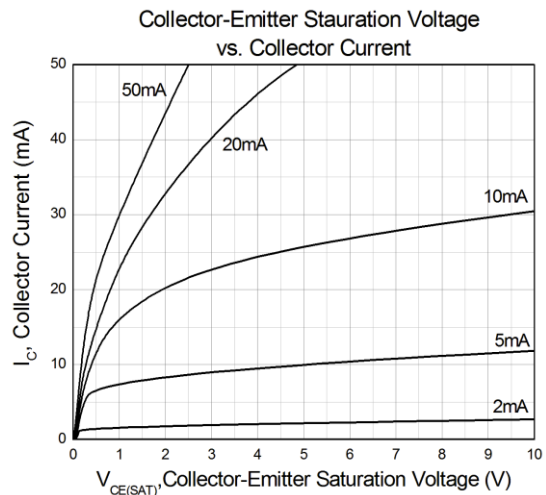


Figure 6

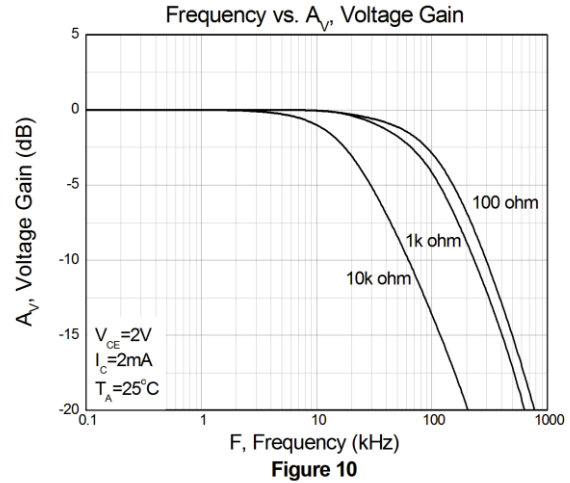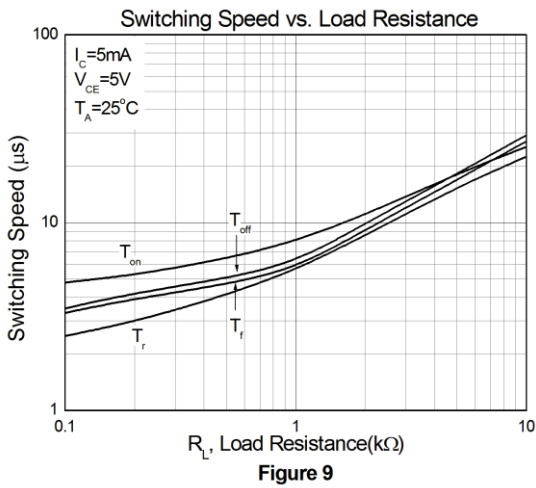


CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

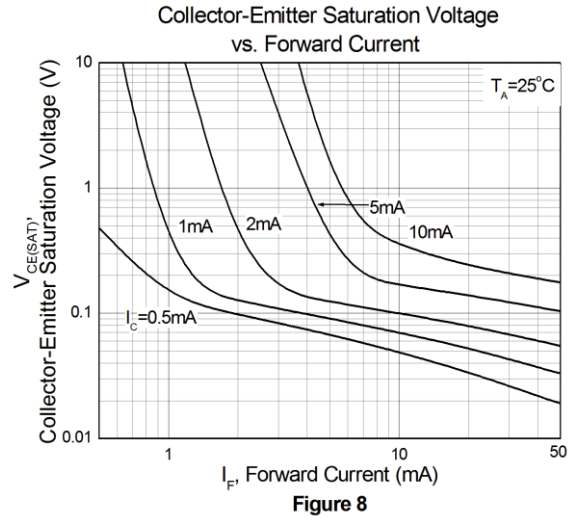

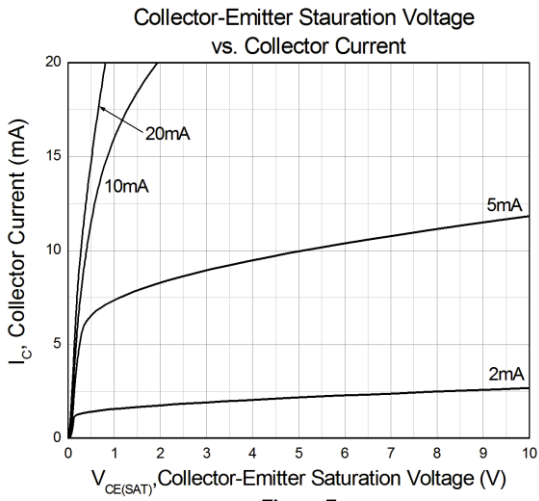


CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W
CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W
DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Package Dimension *Dimensions in mm unless otherwise stated*

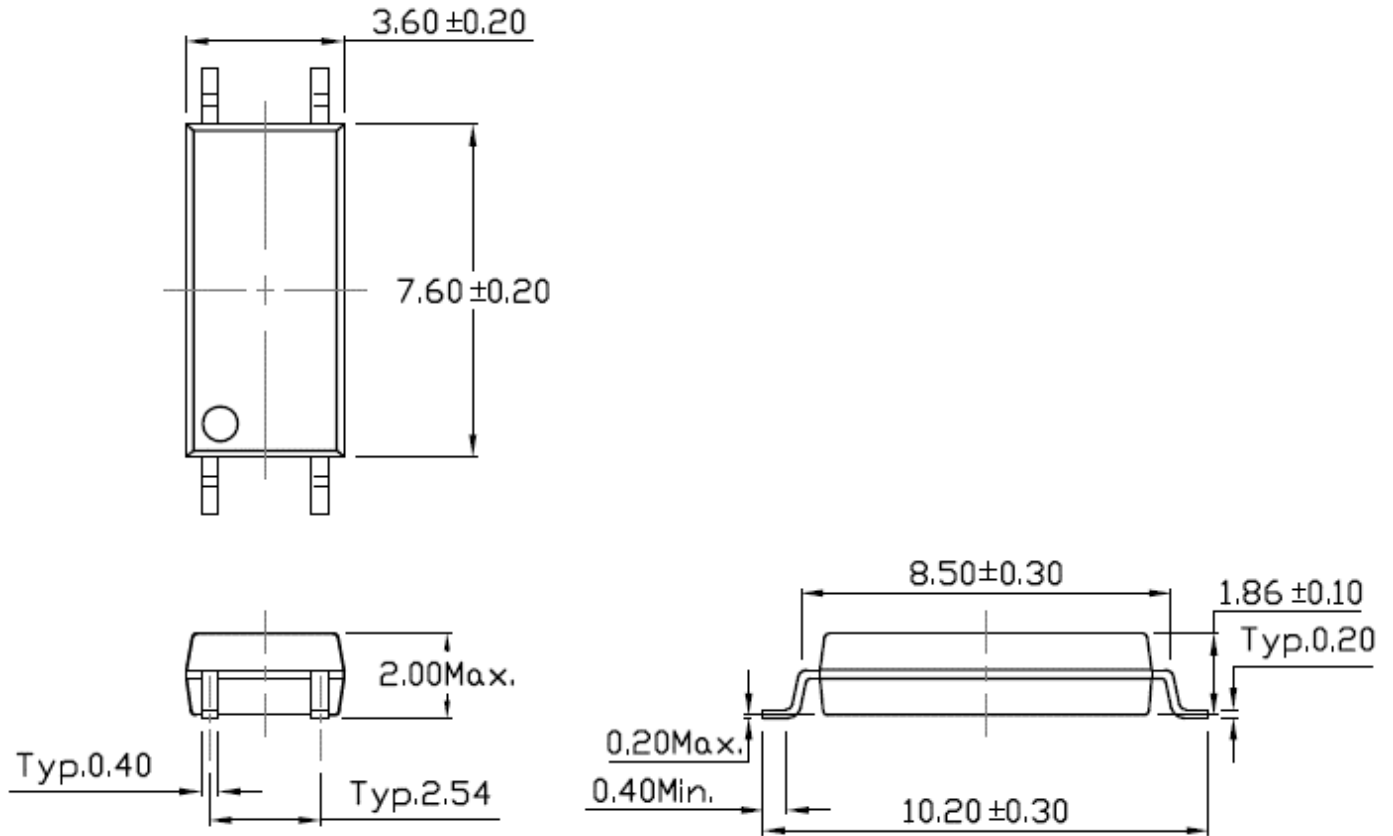

Recommended Solder Mask *Dimensions in mm unless otherwise stated*

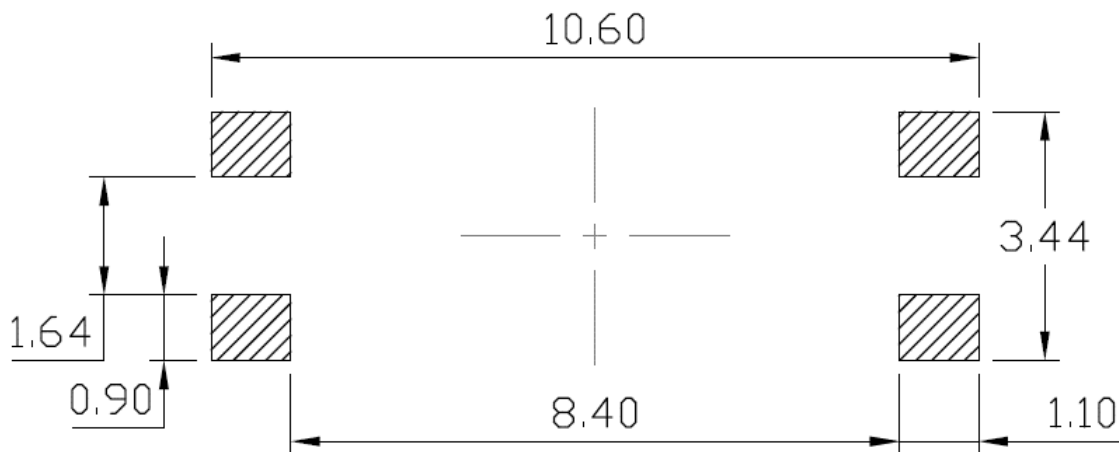



CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W
CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W
DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Marking Information



Note:

- CT : Denotes “CT Micro”
- 1019 : Part Number
- Y : Fiscal Year
- V : VDE safety mark (option)
- WW : Work Week
- K : Manufacturing Code

Ordering Information

CT101X(V)(Y) -W

- X = Part No. (0,1,2,3,4,5,6,7,8,9)
- V = VDE safety mark option (V or none)
- Y = Tape and reel option (T1 or T2)
- W = Outline Color (W, White)


| Option | Description | Quantity |
|---------------|---|-----------------|
| T1 | Surface Mount Lead Forming – With Option 1 Taping | 3000Units/Reel |
| T2 | Surface Mount Lead Forming – With Option 2 Taping | 3000Units/Reel |




CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W
CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W
DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Carrier Tape Specifications *Dimensions in mm unless otherwise stated*

Option T1

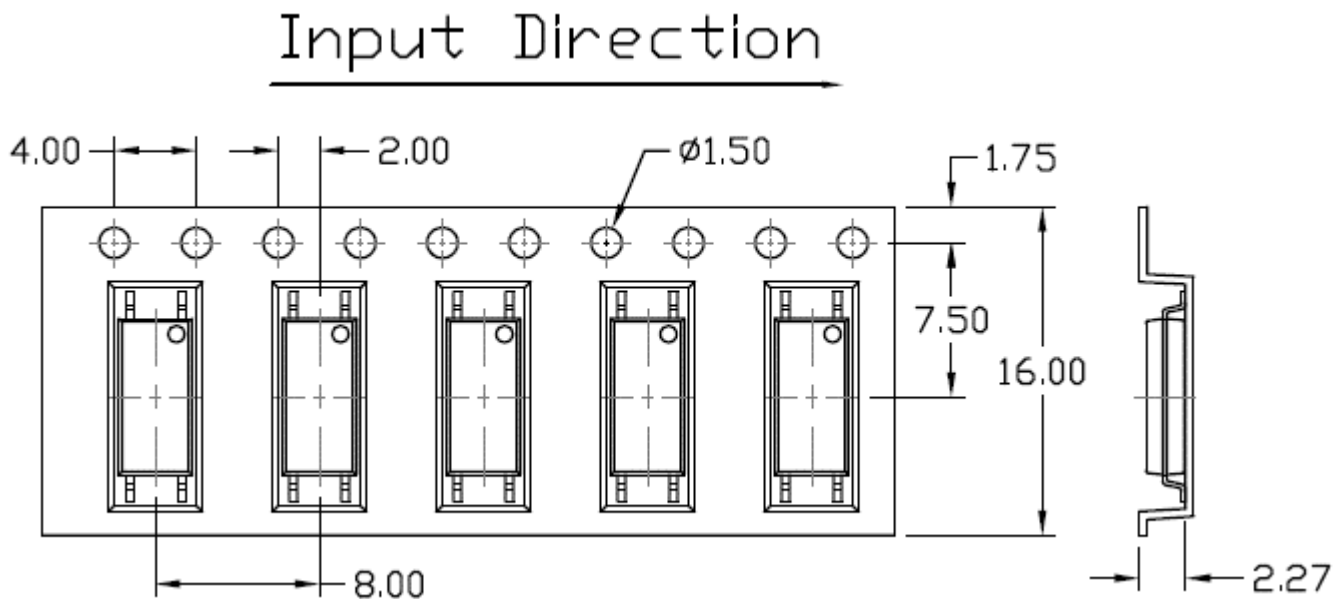

Option T2

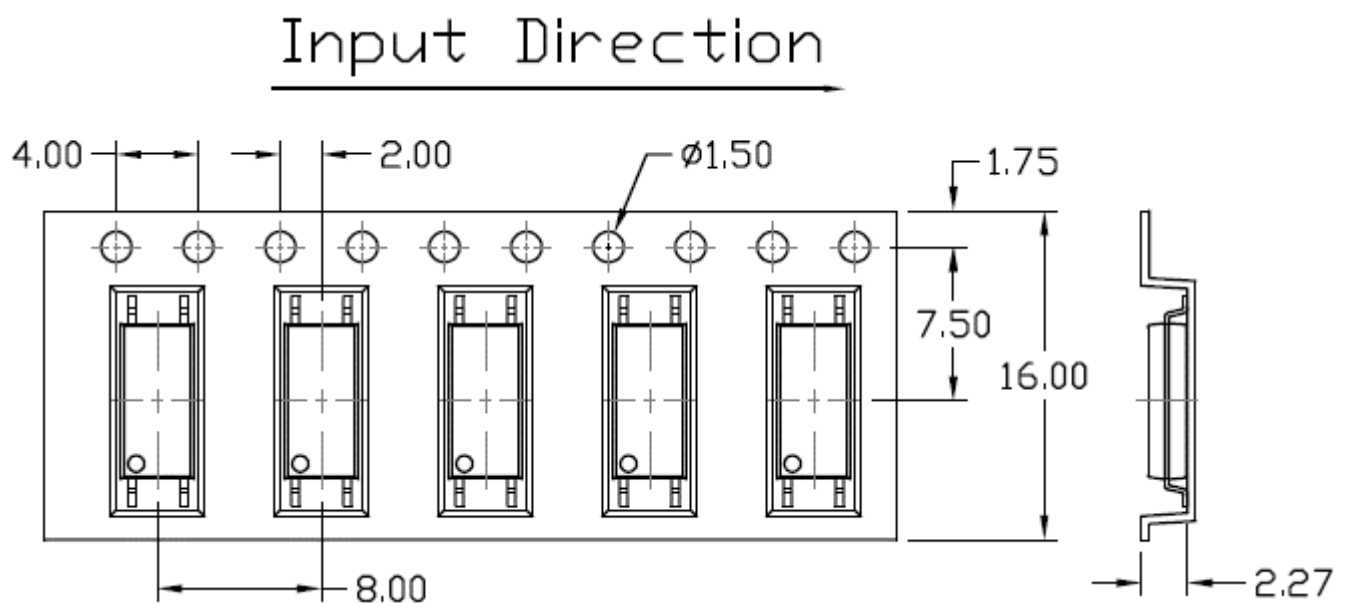



CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W
CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W
DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Wave soldering (JEDEC22A111 compliant)


One time soldering is recommended within the condition of temperature.

Temperature: $260 \pm 5^\circ\text{C}$.

Time: 10 sec.

Preheat temperature: 25 to 140°C .

Preheat time: 30 to 80 sec.

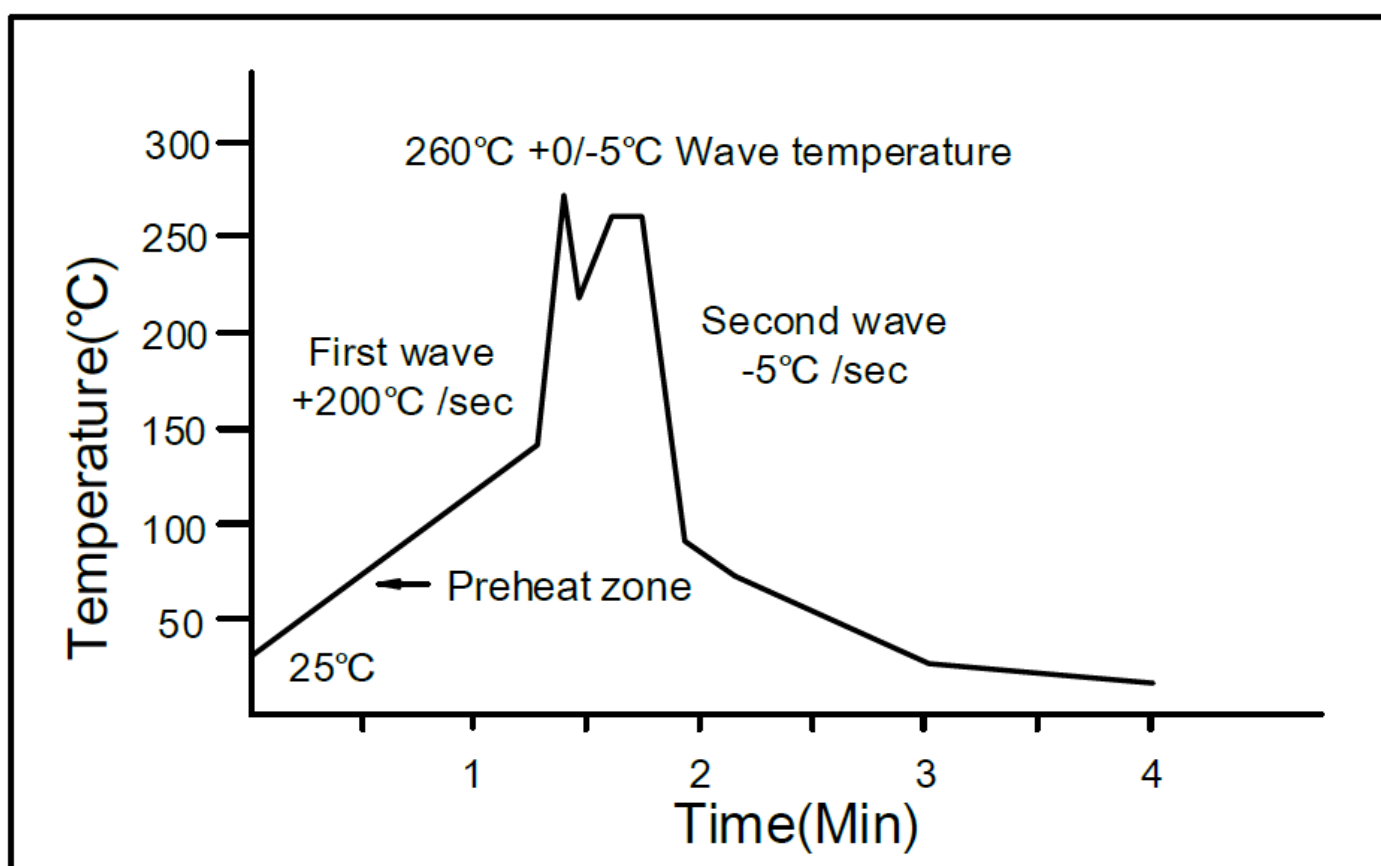

Hand soldering by soldering iron

Allow single lead soldering in every single process.


One time soldering is recommended. Temperature: $350 \pm 5^\circ\text{C}$

Time: 3 sec max.



CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W
 CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W
 DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

Reflow Profile

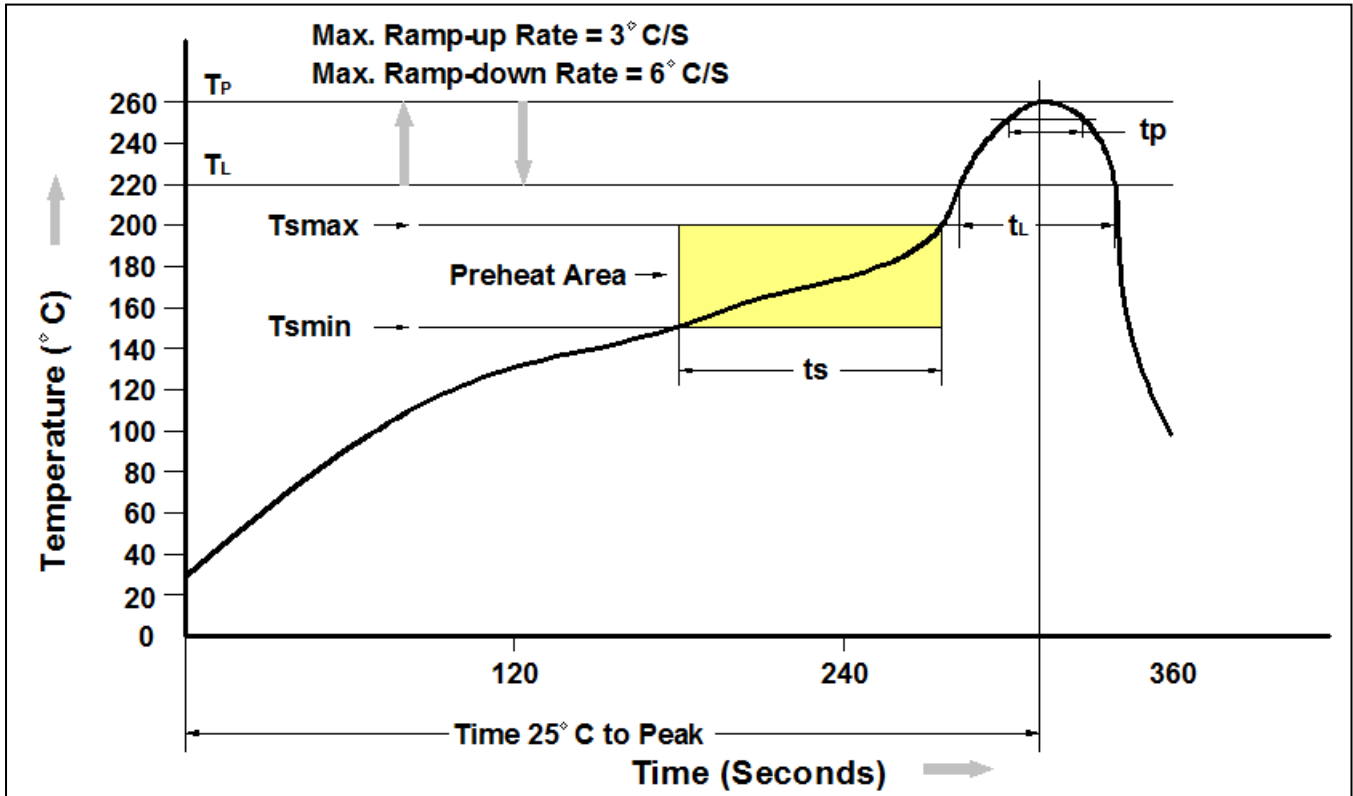

| Profile Feature | Pb-Free Assembly Profile |
|---|--------------------------|
| Temperature Min. (T _{smin}) | 150°C |
| Temperature Max. (T _{smax}) | 200°C |
| Time (t _s) from (T _{smin} to T _{smax}) | 60-120 seconds |
| Ramp-up Rate (t _L to t _P) | 3°C/second max. |
| Liquidous Temperature (T _L) | 217°C |
| Time (t _L) Maintained Above (T _L) | 60 – 150 seconds |
| Peak Body Package Temperature | 260°C +0°C / -5°C |
| Time (t _P) within 5°C of 260°C | 30 seconds |
| Ramp-down Rate (T _P to T _L) | 6°C/second max |
| Time 25°C to Peak Temperature | 8 minutes max. |



CT1010-W, CT1011-W, CT1012-W, CT1013-W, CT1014-W
CT1015-W, CT1016-W, CT1017-W, CT1018-W, CT1019-W
DC Input 4-Pin Long Mini-Flat Phototransistor Optocoupler

DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [High Speed Optocouplers](#) category:

Click to view products by [CT Micro International](#) manufacturer:

Other Similar products are found below :

[6N136F](#) [PS8502L2-AX](#) [ACNW261L-000E](#) [ACPL-344JT-000E](#) [ACPL-K49T-500E](#) [ACPL-K74T-000E](#) [ACPL-K75T-000E](#) [ACPL-W21L-560E](#) [ACPL-K44T-500E](#) [TLP187\(TPL,E\(T](#) [TLP2601\(TP1,F\)](#) [610737H](#) [6N137A-X001](#) [6N137A-X017T](#) [6N139-X007T](#) [HCPL2630M](#) [HCPL2731SM](#) [TLP555\(F\)](#) [HCPL2630SM](#) [PS2841-4A-F3-AX](#) [PS9817A-1-F3-AX](#) [PS9821-2-F3-AX](#) [ORPC-817D](#) [ORPC-817M/C](#) [ORPC-817M/B](#) [PT17-51C/L129\(BIN2\)](#) [TLP521-4GBSM](#) [UMW817C](#) [6N137S1\(TA\)](#) [TLP521GB](#) [TLP521GB-S](#) [PS2501](#) [PS2501-S](#) [TLP785GB](#) [TLP785GB-S](#) [LTV-214-G](#) [TLP2766A\(E](#) [TLP2766A\(LF4,E](#) [LCR-0202](#) [EL814S1\(TA\)-V](#) [PC817X4NSZ2B](#) [CYPC817](#) [OR-MOC3023](#) [TLP267J\(TPL,E\(T](#) [TLP109\(TPL,E\(O](#) [EL2514S1\(TU\)\(CLW\)-G](#) [EL816S2\(C\)\(TU\)-F](#) [TLP281-4](#) [MOC3023M](#) [ACPL-K49T-060E](#)