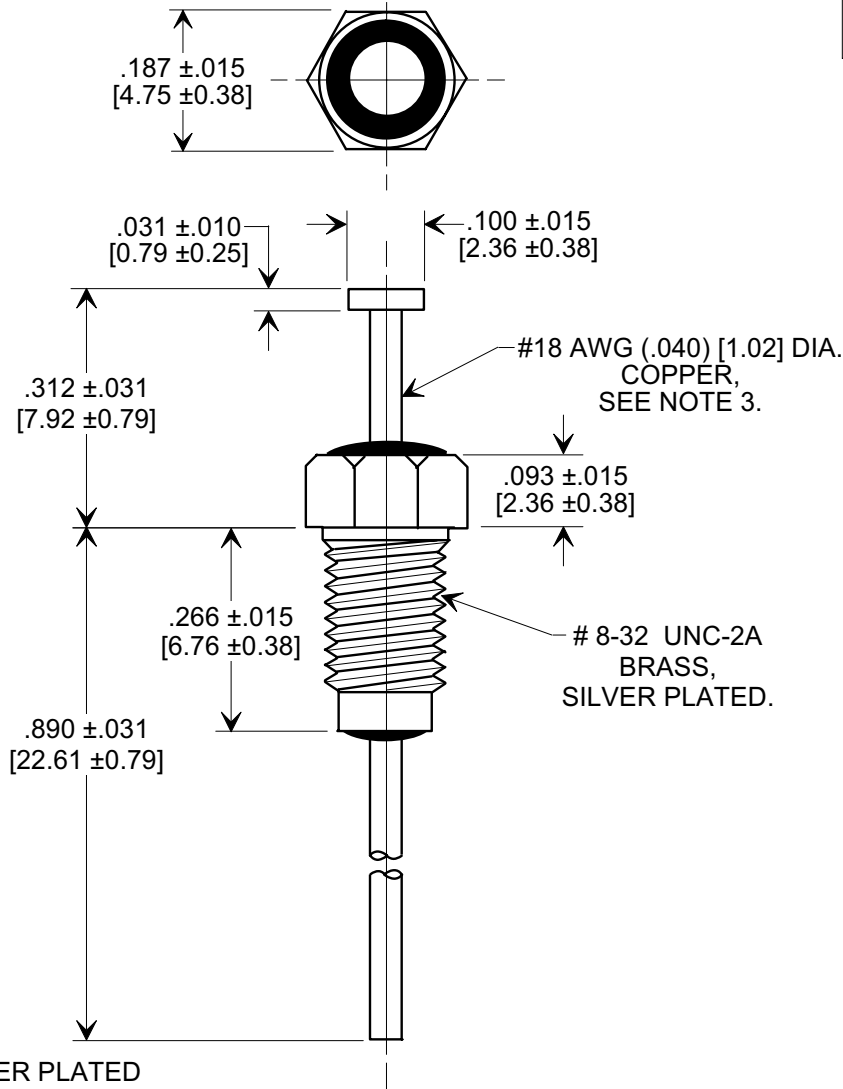# MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - [   ]

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

.187 ±.015
[4.75 ±0.38]

ORIENTATION

CIRCUIT

.031 ±.010
[0.79 ±0.25]

.100 ±.015
[2.36 ±0.38]

#18 AWG (.040) [1.02] DIA.
COPPER,
SEE NOTE 3.

.312 ±.031
[7.92 ±0.79]

.093 ±.015
[2.36 ±0.38]

.266 ±.015
[6.76 ±0.38]

8-32 UNC-2A
BRASS,
SILVER PLATED.

.890 ±.031
[22.61 ±0.79]

NOTES:
1. SUPPLIED WITH SILVER PLATED
HEX NUT AND LOCKWASHER.
2. TUSONIX STANDARD PART NUMBER: 4201-006.
TUSONIX RoHS COMPLIANT PART NUMBER: 4201-006 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
3. LEAD FINISH: STANDARD PART #: 60/40 SOLDER PLATED. RoHS PART #: SILVER PLATED.
4. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS.
STANDARD PART: BLACK INK. RoHS PART: GREEN INK.

MIN. CAP. (pF)	WORKING VOLTAGE (WVdc)		CURRENT (Idc)	DWV (VDC)	I.R. MIN. @ 100 VDC	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220			
	85°C	125 °C				10 MHz	100 MHz	1 GHz	10 GHz
1500	200	100	15 A	400	10 G	5	38	63	70

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for EMI Feedthrough Filters *category:*

Click to view products by CTS *manufacturer:*

Other Similar products are found below :

FN7611-63-M6 FN7612-10-M3 FN7660-100-M8 1202F-054 1609991-8 1609992-2 16DFC6-C 16FFD6-HE 2-1609992-2 2443-007-X5S0-102MLF 2443-007-X5W0-502ZLF 2463-001-X5S0-471MLF 1609990-8 1609991-3 1609992-1 1609992-3 1609993-1 1609993-7 200AFC6-P 200DFC6-P FN7510-100-M8 FN7510-32-M4 FN7562-100-M8 FN7562-200-M10 FN7563-100-M8 FN7611-10-M3 FN7612-63-M6 FN7661-16-M4 2450-001-X5U0-102PLF 2499-003-X5S0-152MLF 32AFC6-H 4100-000LF 4201-050LF 4204-001LF 4253-002LF 4306-019LF 4101-004LF 4201-003LF 4208-000LF 4600-067 094-6526-0000 100AFC6-G 10AFC6-B 10DFC6-C 1-1609990-3 1-1609990-7 1-1609992-8 1-1609990-1 1-1609991-1 FN7514-32-M4