

Features

- Low Loss
- High Rejection
- Low Ripple


Description

Surface mount, silver (Ag) coated ceramic duplexer designed for broadband applications.

Weight: 3.3 grams typical

Material: Filter is composed of a ceramic block coated with Ag and a shield made of nickel silver plated steel.

Filter complies with RoHS standards.

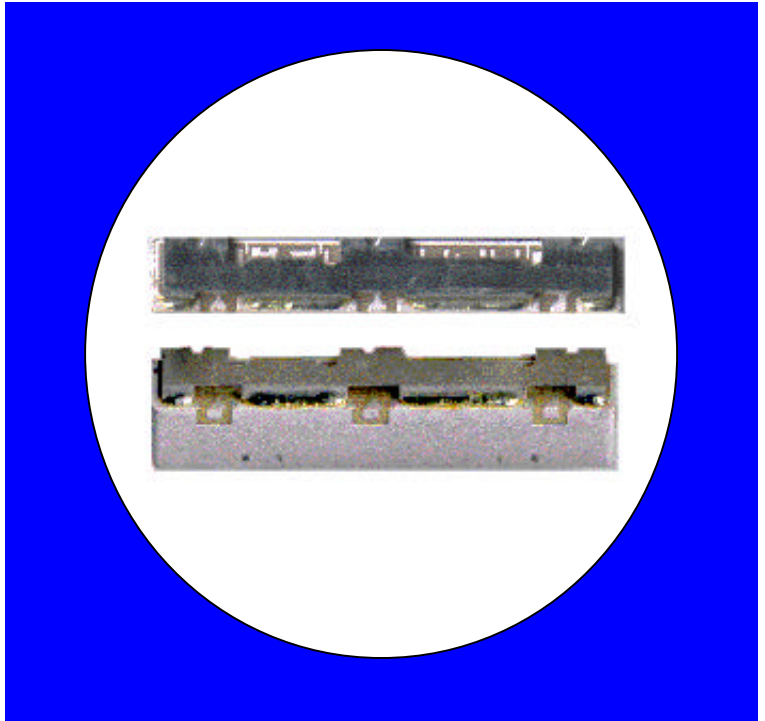

Electrical Specifications

Parameter	Frequency MHz	Typical @ 25°C	Specification @ 25°C	Spec over -30°C to +80°C
Low Band Response (S12)				
Passband Iloss	3400 - 3450	-2.40	-2.60	-3.00
Passband Ripple	3400 - 3450	0.90	1.30	1.50
Passband Return Loss @ Port 1	3400 - 3450	-12.50	-10.00	-10.00
Passband Return Loss @ Port 2	3400 - 3450	-12.50	-10.00	-10.00
Attenuation	3350	-33.00	-30.00	-30.00
	3500 - 3550	-51.00	-48.00	-48.00
High Band Response (S31)				
Passband Iloss	3500 - 3550	-2.40	-2.60	-3.00
Passband Ripple	3500 - 3550	1.00	1.30	1.50
Passband Return Loss @ Port 1	3500 - 3550	-12.50	-10.00	-10.00
Passband Return Loss @ Port 3	3500 - 3550	-12.50	-10.00	-10.00
Attenuation	3400 - 3450	-53.00	-50.00	-50.00
	3625	-31.00	-28.00	-28.00
Isolation (S23)				
Rejection @ Low Band	3400 - 3450	-58.00	-55.00	-55.00
Rejection @ High Band	3500 - 3550	-53.00	-50.00	-50.00
Power into any port		2 Watt max		

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning category](#):

Click to view products by [CTS manufacturer](#):

Other Similar products are found below :

[MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [DC4859J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [DSS-313-PIN](#) [B39321R801H210](#) [B39321R821H210](#) [B39921B4317P810](#) [1A0220-3](#) [2089-6207-00](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [1P510S](#) [CER0813B](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [B69842N5807A150](#) [BD0810N50100AHF](#) [BD2326L50200AHF](#) [BD2425J50200AHF](#) [HMC189AMS8TR](#) [C5060J5003AHF](#) [JHS-114-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2081E](#) [SF2194E](#) [SF2238E](#) [CDBLB455KCAX39-B0](#) [RF1353C](#) [PD0922J5050D2HF](#)