




**FEATURES**


- 32.7680 kHz Frequency Reference
- Package Size 2.5mm x 2.0mm
- Fundamental Crystal Design
- Hermetic Ceramic Package
- Frequency Stability,  $\pm 50$  ppm Standard
- Operating Temperature,  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  Standard
- Tape & Reel Packaging, EIA-418
- **RoHS/Green Compliant [6/6]**

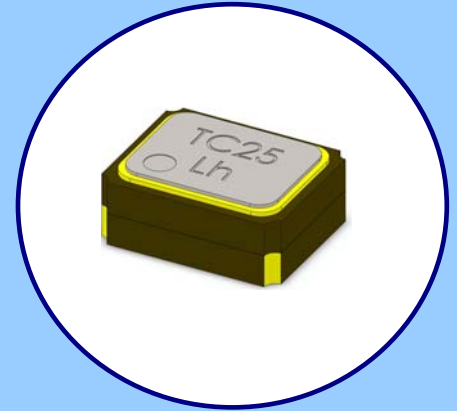

**APPLICATIONS**

Model TC25 is ideal for use in a wide range of communication equipment, Measurement equipment, industrial applications, automotive electronics, wireless communications, PDAs, mobile phones and notebooks.

**ORDERING INFORMATION**

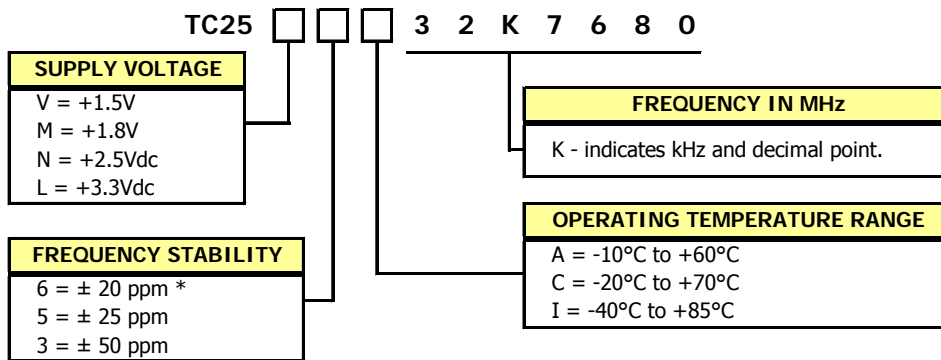

\* Temperature codes A and C.


Example Part Numbers:

- TC25L3I32K7680
- TC25L5I32K7680

**Not all performance combinations and frequencies may be available.  
Contact your local CTS Representative or CTS Customer Service for availability.**

**PACKAGING INFORMATION [Reference Only]**

Device quantity is 1k pcs. minimum and 3k pcs. maximum per 180mm reel.  
DIMENSIONS IN MILLIMETERS

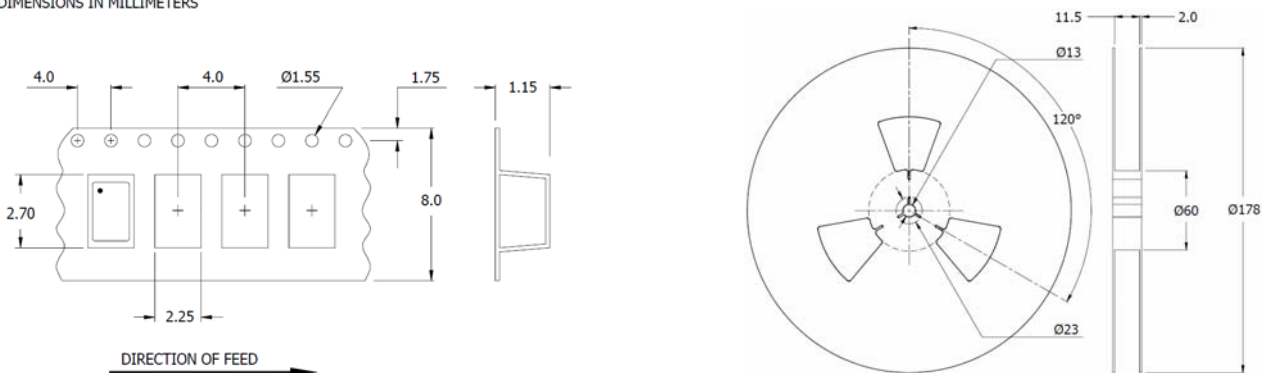


**ELECTRICAL CHARACTERISTICS**


ELECTRICAL PARAMETERS	PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
	Frequency	$f_o$	-		32.7680		kHz
	Operating Mode	-	-	AT Fundamental			-
	Output Type	-	-	HCMOS			
	Supply Voltage	$V_{CC}$	$\pm 10\%$	1.5, 1.8, 2.5, 3.3			V
	Current	$I_{CC}$	15pF Load	-	-	3.0	mA
	Frequency Stability	$\Delta f/f_o$	See Ordering Information	20, 25, 50			ppm
	Operating Temperature Range	$T_A$	-	-10	-	+60	°C
				-20	-	+70	
				-40	-	+85	
	Load Capacitance	$C_L$	CMOS	-	15	-	pF
	Output Voltage Levels						
Logic '1' Level	$V_{OH}$	CMOS Load	0.9 $V_{CC}$	-	-	V	
Logic '0' Level	$V_{OL}$	CMOS Load	-	-	0.1 $V_{CC}$		
Rise and Fall Time	$T_{r}, T_f$	-	-	-	50	ns	
Output Duty Cycle	SYM	@ 50% Level	45	-	55	%	
Start-up Time	$T_S$	Application of $V_{CC}$	-	5.0	10	ms	
Enable Function							
Enable Input Voltage	$V_{IH}$	Pin 1 Logic '1', Output Enabled	0.7 $V_{CC}$	-	-	V	
Disable Input Voltage	$V_{IL}$	Pin 1 Logic '0', Output Disabled	-	-	0.3 $V_{CC}$		
Aging	$\Delta f/f_o$	@ +25°C, 1st year	-	3.0	5.0	$\pm$ ppm	
Storage Temperature Range	$T_{STR}$	-	-55	-	+125	°C	

**MECHANICAL SPECIFICATIONS**

**TC25 PACKAGE DRAWING**

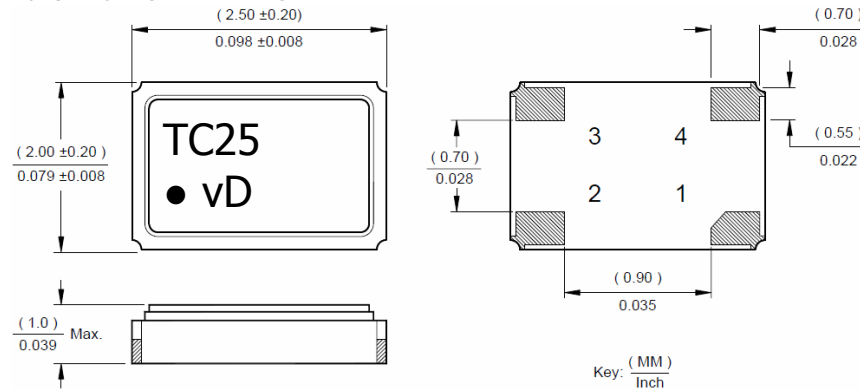

**SUGGESTED SOLDER PAD GEOMETRY**

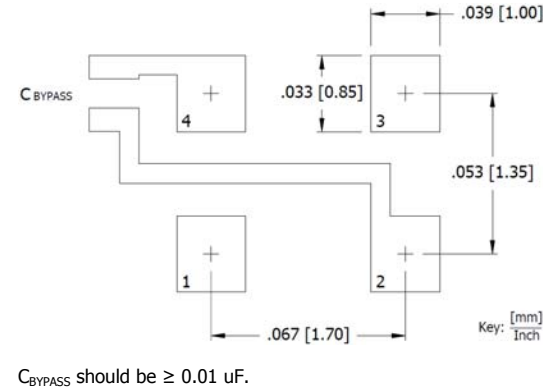

**MARKING INFORMATION**

- TC25 – CTS Model Series.
- – Pin 1 identifier.
- v – Voltage code.  
[L=3.3V, N=2.5V, M=1.8V, V=1.5V]
- D – Date code. See Table I for codes.

Complete CTS part number, frequency value, date code and manufacturing site code information must appear on reel and carton labels.

**NOTES**

- Termination pads (e4); barrier plating is nickel [Ni] with gold [Au] flash plate.
- Reflow conditions per JEDEC J-STD-020; 260°C maximum, 20 seconds.
- MSL = 1.

**PIN ASSIGNMENTS**

PIN	SYMBOL	DESCRIPTION
1	EOH	Enable Input
2	GND	Circuit & Package Ground
3	Output	RF Output
4	$V_{CC}$	Supply Voltage

**TABLE I – DATE CODE**

YEAR		MONTH					JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2001	2005	2009	2013	2017	A	B	C	D	E	F	G	H	J	K	L	M		
2002	2006	2010	2014	2018	N	P	Q	R	S	T	U	V	W	X	Y	Z		
2003	2007	2011	2015	2019	a	b	c	d	e	f	g	h	j	k	l	m		
2004	2008	2012	2016	2020	n	p	q	r	s	t	u	v	w	x	y	z		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Clock Oscillators](#) category:*

*Click to view products by [CTS](#) manufacturer:*

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-25.000000X](#)