Additional Resources: Product Page | 3D Model | PCB Footprint

# **CUI** DEVICES

date 02/04/2020

page 1 of 3

## MODEL: CC-0601 | DESCRIPTION: MAGNETIC BUZZER TRANSDUCER

#### **FEATURES**

- through hole
- 1.5 V rated
- externally driven





#### **SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage	Vo-p		1.5		Vo-p
operating voltage		1.0		1.7	Vo-p
current consumption	at rated voltage, 3,000 Hz square wave, ½ duty			80	mA
rated frequency			3,000		Hz
sound pressure level	at 10 cm (A-weight), rated voltage, 3,000 Hz square wave, ½ duty	70	77		dBA
coil resistance		5	6	7	Ω
dimensions	Ø6.6 x 3.5				mm
weight			0.4		g
material	PPO				
terminal	pin type (Au plating)				
operating temperature		-20		60	°C
storage temperature		-30		70	°C
RoHS	yes				

Notes: 1. All specifications measured at 5~35°C, humidity at 45~85%, under 86~106 kPa pressure, unless otherwise noted.

### **SOLDERABILITY**


parameter	conditions/description	min	typ	max	units
hand soldering <sup>2</sup>	for maximum 2 seconds	330		380	°C

Notes: 2. Not recommended for wave soldering


### **MECHANICAL DRAWING**

units: mm


tolerance: ±0.5 mm

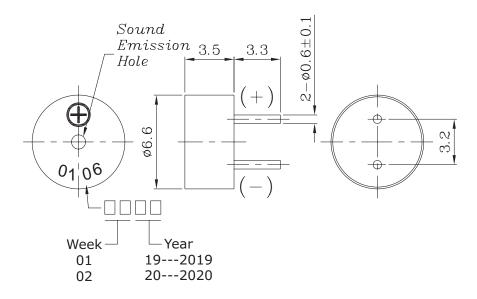

## **FREQUENCY RESPONSE CURVE**

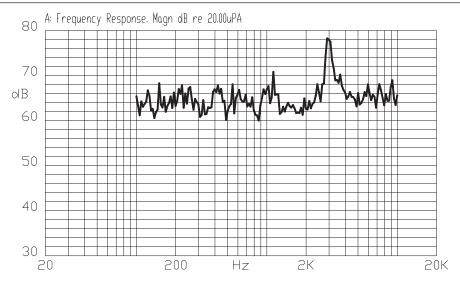

## **APPLICATION CIRCUIT**

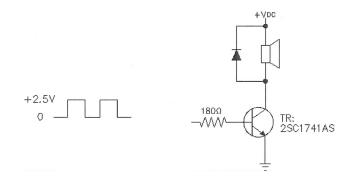

Additional Resources: Product Page | 3D Model | PCB Footprint

CUI Devices | MODEL: CC-0601 | DESCRIPTION: MAGNETIC BUZZER TRANSDUCER date 02/04/2020 | page 3 of 3

#### **REVISION HISTORY**

rev.	description	date
1.0	initial release	08/21/2006
1.01	brand update	02/04/2020

The revision history provided is for informational purposes only and is believed to be accurate.

## **CUI** DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Piezo Buzzers & Audio Indicators category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below:

6-4 68S1240-PA MBA-624 FDG06PSLLF FDG111PLF F/EM12PLF F/NRMB 24 BLACK LF PF-35N29WQ PFD-21A29W PFD-27A35PQ PL-21N30WQ PL-27A35PSQ PLD-21N30W PLD-21N30WQ PS-531Q PT-3534FP EBPT-401 B822B PB-1220PEQ S6109 SBM616PR SC110E SC2036ACP SC616N-2 SC628FW SC628MPG SC648D SCS045MD9DT3S ESZ-25B-5-250B FCM12PLF SSX-52SA F/EB20P-DR LF F/SMD03A LF FSMD8585JSLF F/TCW 12 WITH LABEL LF F/UCW 06 WITH LABEL LF PFD-27N36W PKM22EPPH40S1-B0 PKM35-4A0 PL-35N29WQ PLD-27A35PQ PS-552Q CM-5 REF-202 B/SE 128 RED LF KBS-20DA-7AS KBS-27DA-5C-105 LSC628ANR 03-810.001 RTO-1R07-001