CUI DEVICES

date 04/15/2021

page 1 of 4

MODEL: CDMG15008-03A | DESCRIPTION: SPEAKER

FEATURES

- 15 mm round frame
- 0.3 W input power
- 8.0 Ohm
- mylar cone
- neodymium magnet





SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
input power	max. power: IEC-60268-5, filter 60 s on / 120 s off, 10 cycles at room temp		0.3	0.5	W
impedance	at 1.5 kHz, 1 V	6.8	8	9.2	Ω
resonant frequency	at 1 V	720	900	1,080	Hz
response				20,000	Hz
sound pressure level	at 0.3 W, 10 cm ave. at 1.0, 1.2, 1.5, 2.0 kHz at 1.0 W, 1 m ave. at 1.0, 1.2, 1.5, 2.0 kHz	87 85	92 88	95 91	dB dB
distortion	at 1.5 kHz, 0.3 W			10	%
buzz, rattle, etc.	must be normal at sine wave between Fo-20 kHz			1.55	V
dimensions	Ø15 x 2.8				mm
magnet	Nd-Fe-B				
material	metal				
cone material	mylar				
terminal	solder pads				
operating temperature		-40		85	°C
weight			1.2		g
RoHS	yes				


SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for 3±1 seconds	360	370	380	°C


MECHANICAL DRAWING


units: mm

tolerance: ± 0.2 mm

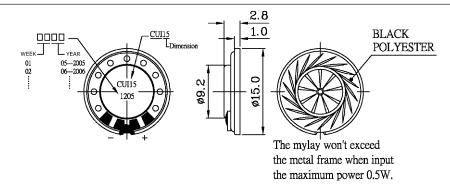

FREQUENCY RESPONSE CURVE

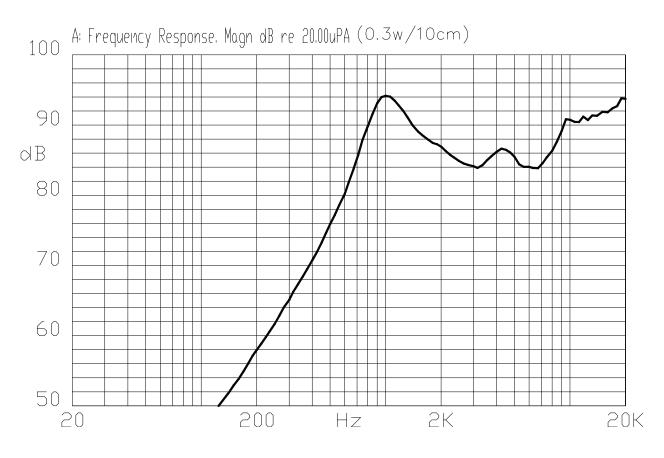


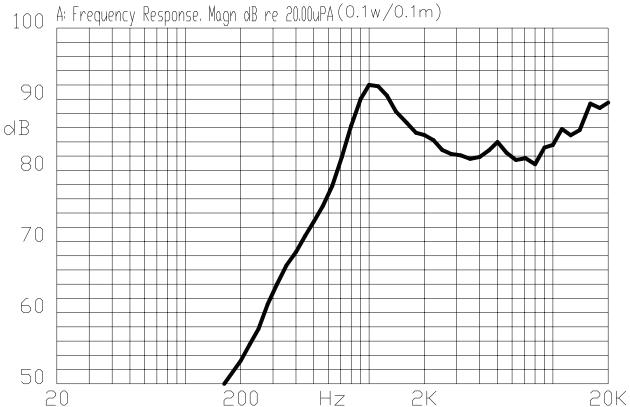


PACKAGING

units: mm

Tray Size: 350 x 235 x 20 mm
Tray QTY: 100 pcs per tray
Carton Size: 355 x 242 x 300 mm
Carton QTY: 2,500 pcs per carton

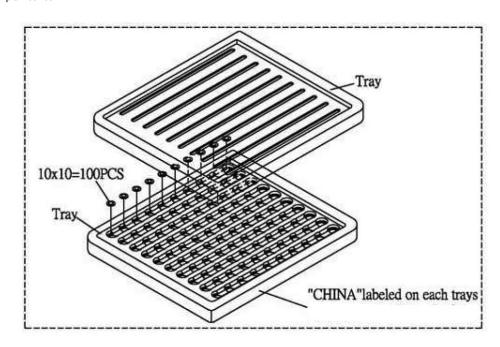

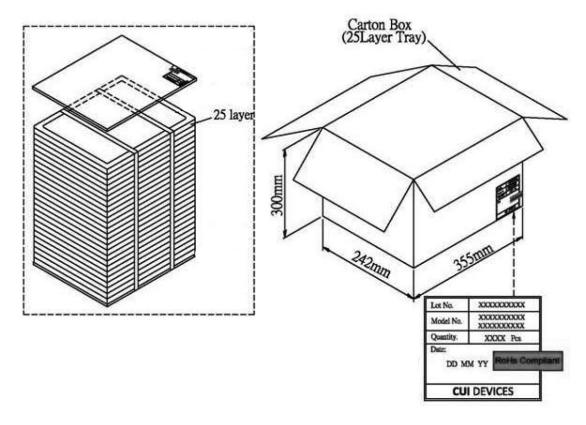

Additional Resources: Product Page | 3D Model

CUI Devices | MODEL: CDMG15008-03A | DESCRIPTION: SPEAKER date 04/15/2021 | page 4 of 4

REVISION HISTORY

rev.	description	date
1.0	initial release	12/06/2006
1.01	brand update	04/15/2021

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below:

FC-30814-P127 AS02832MR-2-R PB-1220PE PB-2015PQ 900-00001 AB2025B-LW50-R SWFK-31736-000 PT-2065FW PT-4175W AT-2830-TW-LW35-R ED-30761-000 CI-30120-A42 SMT-0440-T-2-R PB-0927PQ BF-7083-000 SMS2020-08H4.5 LF BDT1717-08H6.5W56MLF GSPK1003PN-8R0.2W-L100 GSPK151103TN-8R0.2W GSPK2014035PN-8R0.5W-L100 AS03608MR-LW100-R 24520 SMT-0540-S-2-R 1450069 9091653 9091661 IPS-G6000-5 9090231 FS50MS0820-H9.7 FS4014-4-2W PBM4-13.B29R.A115.0663 PBM4-13.B31R.A115.0663 PBM4-13.B33R.A115.0663 PBM4-13.B35R.A115.0663 A-10-6-BG360-HD1Z-GA-M4Z-ZW A-10-6-BG410-HD1Z-AA-AGZ-ZW A-10-6-BG410-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-AGZ-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-AGZ-ZW A-10-6-BG340-HD1Z-AA-AGZ-ZW A-10-6-