Additional Resources: Product Page | 3D Model

CUI DEVICES

date 10/23/2020

page 1 of 3

MODEL: CLS0361-L152 | DESCRIPTION: SPEAKER

FEATURES

- 36 mm
- round frame
- 2.0 W
- 8 Ω
- neodymium magnet
- paper cone
- wire leads






SPECIFICATIONS

•	min	typ	max	units
		2	3	W
at 1k Hz, 1.0 V	6.8	8	9.2	Ω
at 1.0 V	360	450	540	Hz
	Fo		10,000	Hz
at 1.0 W, 50 cm, avg at 0.6, 0.8, 1.0, 1.2 kHz	85	88	91	dB
at 1 kHz, 1 W			10	%
must be normal at sine wave			4	V
36 x 36 x 6.0				mm
Nd-Fe-B				
paper				
wire leads				
		8.6		g
	-25		60	°C
for maximum 3 seconds	340	350	360	°C
yes				
	at 1.0 V at 1.0 W, 50 cm, avg at 0.6, 0.8, 1.0, 1.2 kHz at 1 kHz, 1 W must be normal at sine wave 36 x 36 x 6.0 Nd-Fe-B paper wire leads for maximum 3 seconds	at 1.0 V 360 Fo at 1.0 W, 50 cm, avg at 0.6, 0.8, 1.0, 1.2 kHz 85 at 1 kHz, 1 W must be normal at sine wave 36 x 36 x 6.0 Nd-Fe-B paper wire leads -25 for maximum 3 seconds 340	at 1k Hz, 1.0 V 6.8 8 at 1.0 V 360 450 Fo at 1.0 W, 50 cm, avg at 0.6, 0.8, 1.0, 1.2 kHz 85 88 at 1 kHz, 1 W must be normal at sine wave 36 x 36 x 6.0 Nd-Fe-B paper wire leads 8.6 -25 for maximum 3 seconds 360 450 Fo 88 88 88 88 88 88 88 88 88 88 88 88 88	at 1k Hz, 1.0 V 6.8 8 9.2 at 1.0 V 360 450 540 Fo 10,000 at 1.0 W, 50 cm, avg at 0.6, 0.8, 1.0, 1.2 kHz 85 88 91 at 1 kHz, 1 W 10 must be normal at sine wave 4 4 36 x 36 x 6.0 36 x 36 x 6.0 8.6 Nd-Fe-B 8.6 8.6 paper 8.6 60 for maximum 3 seconds 340 350 360

MECHANICAL DRAWING


units: mm

tolerance: ±0.3 mm wire: UL1007 28 AWG

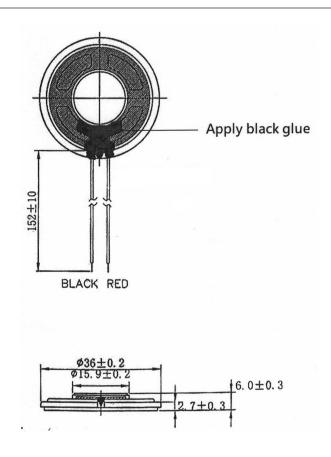

FREQUENCY RESPONSE CURVE

parameter	conditions/description
potentiometer range	50 dB
rectifier	RMS
lower limit frequency	20 Hz
wr. speed	100 mm/sec
zero level	60 dB

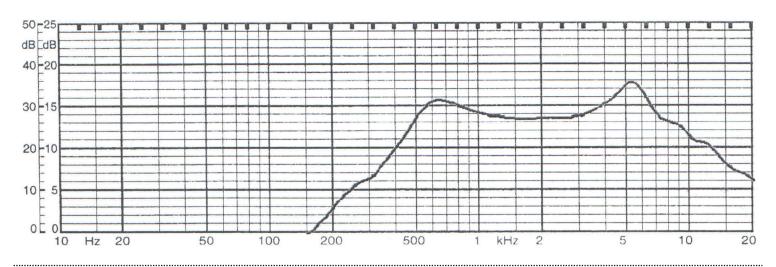

Additional Resources: Product Page | 3D Model

CUI Devices | MODEL: CLS0361-L152 | DESCRIPTION: SPEAKER date 10/23/2020 | page 3 of 3

REVISION HISTORY

rev.	description	date	
1.0	initial release	07/03/2007	
1.01	housing, frequency response, and resonant frequency changed	06/20/2019	
1.02	brand update	01/20/2020	
1.03	added glue over terminals	10/23/2020	

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below:

FC-30814-P127 AS02832MR-2-R PB-1220PE PB-2015PQ 900-00001 AB2025B-LW50-R SWFK-31736-000 PT-2065FW PT-4175W AT-2830-TW-LW35-R ED-30761-000 CI-30120-A42 SMT-0440-T-2-R PB-0927PQ BF-7083-000 SMS2020-08H4.5 LF BDT1717-08H6.5W56MLF GSPK1003PN-8R0.2W-L100 GSPK151103TN-8R0.2W GSPK2014035PN-8R0.5W-L100 AS03608MR-LW100-R 24520 SMT-0540-S-2-R 1450069 9091653 9091661 IPS-G6000-5 9090231 FS50MS0820-H9.7 FS4014-4-2W PBM4-13.B29R.A115.0663 PBM4-13.B31R.A115.0663 PBM4-13.B33R.A115.0663 PBM4-13.B35R.A115.0663 A-10-6-BG360-HD1Z-GA-M4Z-ZW A-10-6-BG410-HD1Z-AA-AGZ-ZW A-10-6-BG410-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-AGZ-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-AGZ-ZW A-10-6-BG340-HD1Z-AA-AGZ-ZW A-10-6-