CUI DEVICES

MODEL: CMS-34348N | DESCRIPTION: SPEAKER

FEATURES

- miniature speaker
- 380 Hz resonant frequency
- Nd-Fe-B magnet





SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
input power	maximum power: IEC-60268-5, filter 60s on/120s off, 10 cycles at room temp		3.0	4.0	W
impedance	at 1.0 kHz, 1.0 V	6.8	8	9.2	Ω
resonant frequency (Fo)	at 1.0 V	304	380	456	Hz
frequency response	output SPL -10 dB	Fo		10,000	Hz
sound pressure level	at 1.0 W, 0.5 m ave, at 0.8, 1.0, 1.2, 1.5 kHz at 3.0 W, 0.5 m ave, at 0.8, 1.0, 1.2, 1.5 kHz	77 82	80 85	83 88	dB dB
distortion	at 1.0 kHz, 1.0 W			5	%
buzz, rattle, etc.	must be normal at sine wave between Fo \sim 20,000 Hz		4.9		V
dimensions	34 x 34 x 14.5				mm
magnet	Nd-Fe-B				
material	ABS77D				
cone material	mylar				
terminal	solder terminals				
weight			30		g
operating temperature		-20		55	°C
storage temperature		-30		65	°C
RoHS	yes				

Notes: 1. All specifications measured at 5~35°C, humidity at 45~85%, under 86~106 kPa pressure, unless otherwise noted.


SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 3 seconds	370	380	390	°C

MECHANICAL DRAWING

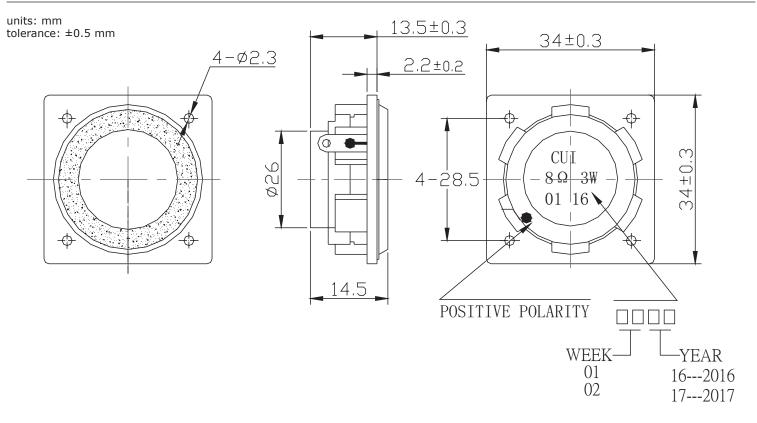

FREQUENCY RESPONSE CURVE

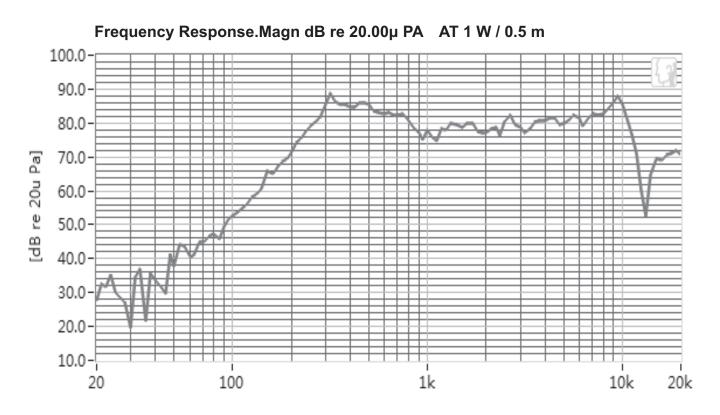


PACKAGING

.....

units: mm

Tray Size: 400 x 200 x 18 mm Carton Size: 420 x 215 x 275 mm Tray QTY: 20 pcs per tray Carton QTY: 280 pcs per carton

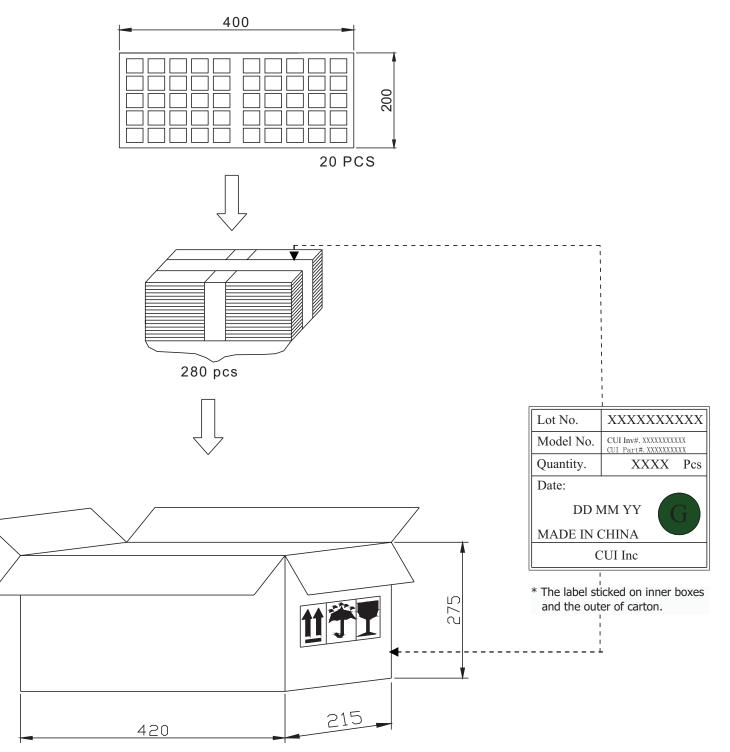

REVISION HISTORY

rev.	description	date
1.0	initial release	06/28/2016
1.01	brand update	01/23/2020

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below :

FC-30814-P127
AS02832MR-2-R
PB-1220PE
PB-2015PQ
900-00001
AB2025B-LW50-R
SWFK-31736-000
PT-2065FW
PT-4175W
AT

2830-TW-LW35-R
ED-30761-000
CI-30120-A42
SMT-0440-T-2-R
PB-0927PQ
BF-7083-000
SMS2020-08H4.5 LF
BDT1717

08H6.5W56MLF
GSPK1003PN-8R0.2W-L100
GSPK151103TN-8R0.2W
GSPK2014035PN-8R0.5W-L100
FS5353DS0830-H19.3

TE082703-8
XMLP040BD21F
AS03608MR-LW100-R
24520
SMT-0540-S-2-R
1450069
9091653
9091661
IPS-G6000-5
9090231

FS4014-4-2W
PBM4-13.B29R.A115.0663
PBM4-13.B31R.A115.0663
PBM4-13.B33R.A115.0663
PBM4-13.B35R.A115.0663
A-10-6

BG360-HD1Z-GA-M4Z-ZW
A-10-6-BG410-HD1Z-AA-AGZ-ZW
A-10-6-BG310-HD1Z-AA-M4Z-ZW
A-10-6-BG310-HD1Z-FC-AGZ-ZW

A-10-6-BG410-HD1Z-GA-M4Z-ZW
A-10-6-BG310-HD1Z-AA-AGZ-ZW
A-10-6-BG310-HD1Z-AA-AGZ-ZW
A-10-6-BG310-HD1Z-AA-AGZ-ZW
A-10-6-BG310-HD1Z-AA-AGZ-ZW
A-10-6-BG325-HD1Z-AA-AGZ-ZW
A-10-6-BG325-HD1Z-AA-AGZ-ZW
A-10-6-BG325-HD1Z-AA-AGZ-ZW
A-10-6-BG325-HD1Z-AA-AGZ-ZW
A-10-6-BG325-HD1Z-AA-AGZ-ZW
A-10-6-BG340-HD1Z-AA-AGZ-ZW
A-10-6-BG340-HD1Z-AA-AGZ-ZW
A-10-6-BG340-HD1Z-AA-AGZ-ZW
A-10-6-BG340-HD1Z-AA-AGZ-ZW
A-10-6-BG340-