CUI DEVICES

SERIES: HSS-B20-NPX-01 | DESCRIPTION: HEAT SINK

FEATURES

- TO-220 package
- round or slot hole attachment options
- black andoized finish
- aluminum





mounting hole		thermal resistance ¹			power dissipation ¹	
type	size	@ 75°C ∆T, nat conv (°C/W)	@ 1 W, nat conv	@ 1 W, 200 LFM	@ 1 W, 400 LFM	@ 75°C ∆T, nat conv (W)
round	Ø3.81	17.74	22.47	5.88	4.17	4.23
slot	3.9 x 9.52	17.74	22.47	5.88	4.17	4.23
	type round	type size (mm) round Ø3.81	type size @ 75°C ΔT, nat conv (mm) (°C/W) round Ø3.81 17.74	type size @ 75°C ΔT, nat conv (mm) @ 1 W, nat conv (°C/W) round Ø3.81 17.74 22.47	type size @ 75°C ΔT, nat conv (mm) @ 1 W, nat conv (°C/W) @ 1 W, 200 LFM (°C/W) round Ø3.81 17.74 22.47 5.88	type size @ 75°C ΔT, nat conv (mm) @ 1 W, nat conv (°C/W) @ 1 W, 200 LFM (°C/W) @ 1 W, 400 LFM (°C/W) round Ø3.81 17.74 22.47 5.88 4.17


Note: 1. See performance curves for full thermal resistance details.

PERFORMANCE CURVES

	Heatsink Temperature Rise Above Ambient (ΔT = Ths - Ta) (°C)				
Power (W)	Natural Conv.	200 LFM	400 LFM		
0	0	0	0		
1	22.47	5.88	4.17		
2	39.28	11.26	7.41		
3	56.71	16.66	11.08		
4	70.54	21.77	14.72		
5	85.88	27.51	18.27		

Ths: "hot spot" temperature measured on the heatsink Ta: ambient temperature

.....

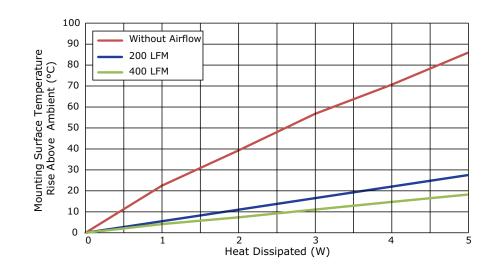


MECHANICAL DRAWING


units: mm tolerance: ±0.5 mm


MATERIAL	AL1050
FINISH	black anodized
THICKNESS	1.2 mm
WEIGHT	HSS-B20-NPR-01: 4.3 g HSS-B20-NPS-01: 4.3 g

HSS-B20-NPR-01










.....



.....

REVISION HISTORY

rev.	description	date
1.0	initial release	03/30/2017
1.01	brand update	02/13/2020

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

.....

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Sinks category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below :

 581102B00000G
 656-15ABPE
 657-20ABPNE
 7020B-TC12-MTG
 73452PPBA
 7G0011A
 PF720G
 A22-4026
 120-1873-007
 HAH10L

 HAH15L
 1542616-1
 HS-2506-F1
 HS-87M0-F2
 218-40CTE3
 231-69PAB-15V
 25-7520
 SW50-4G
 231-75PAB-13V
 231-75PAB-15V
 253

 122ABE-22
 PSC22CB
 HAF10L
 HAQ10T
 D10100-28
 BDN183CBA01
 3-21053-4
 32438
 TX0506-1B
 TX1806B
 LAE66A3CB
 WA-DT2

 101E
 511-3U
 73381PPBA
 73403PPBA
 7G0047C
 COMX-440-HSP
 510-12M
 D10650-40T5
 V8511 Y
 APF40-40-13CB/A01

 780653U04500G
 ATS-54310K-C2-R0
 FK 216 CB SA
 FK 231 SA 220
 648-51AB
 657-20ABPESC
 2341BG
 679-25AG
 FK 212 CB SA