date 09/01/2020

page 1 of 5

SERIES: MD-S | **DESCRIPTION:** MINI DIN CONNECTOR


FEATURES

- PCB mount
- right angle
- non-shielded





PART NUMBER KEY



SPECIFICATIONS

*Discontinued models MD-30S & MD-50S

parameter	conditions/description	min	typ	max	units
rated input voltage	3~8 pin models 9 pin model		30 12		Vdc Vdc
rated input current	3~8 pin models 9 pin model			1 2	A A
contact resistance				30	mΩ
insulation resistance		100			MΩ
voltage withstand	3~8 pin models for 1 minute 9 pin model for 1 minute			500 250	Vac Vac
insertion force	3~8 pin models 9 pin model			45 35	N N
withdrawal force	3~8 pin models 9 pin model	7 10			N N
operating temperature		-25		50	°C
life	3~8 pin models 9 pin model		500 5,000		cycles cycles
flammability rating	UL94V-0				
RoHS	yes				


SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for 1~3 seconds	230		250	°C

MECHANICAL DRAWINGS (MD-30S, MD-40S, MD-50S)

units: mm tolerance: X.X ±0.38 mm X.XX ±0.25 mm X.XXX ±0.13 mm

	MATERIAL	PLATING
body	PBT+30%GF (UL94V-0)	
pins	brass	tin
shield	brass	nickel

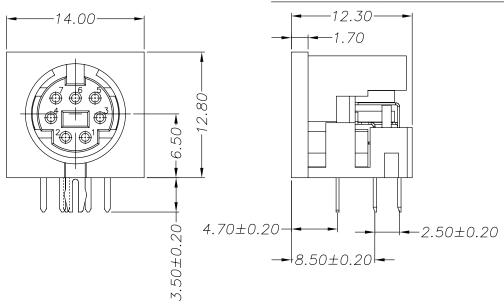


MD-30S



2.2X0.7

MD-40S







Recommended PCB Layout Top View

MD-50S





Recommended PCB Layout Top View




Recommended PCB Layout Top View

MECHANICAL DRAWINGS (MD-60S, MD-70S, MD-80S)

units: mm tolerance: X.X ±0.38 mm X.XX ±0.25 mm X.XXX ±0.13 mm

	MATERIAL	PLATING
body	PBT+30%GF (UL94V-0)	
pins	brass	tin
shield	brass	nickel

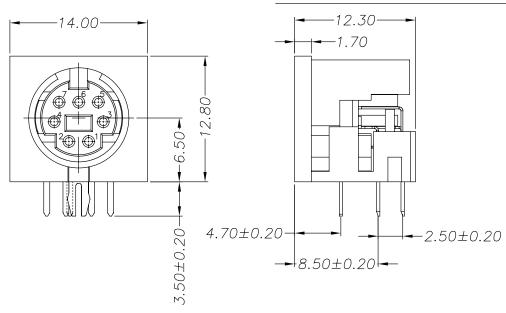

MD-60S




6.50-

.60

MD-70S






Recommended PCB Layout Top View

MD-80S






Recommended PCB Layout Top View

Recommended PCB Layout

MECHANICAL DRAWING (MD-90S)

units: mm tolerance: X.X ± 0.35 mm X.XX ± 0.25 mm X.XXX ± 0.15 mm

	MATERIAL	PLATING
body	PBT (UL94V-0)	
cover	PBT (UL94V-0)	
ground	brass	copper/tin
pins	brass	copper/tin

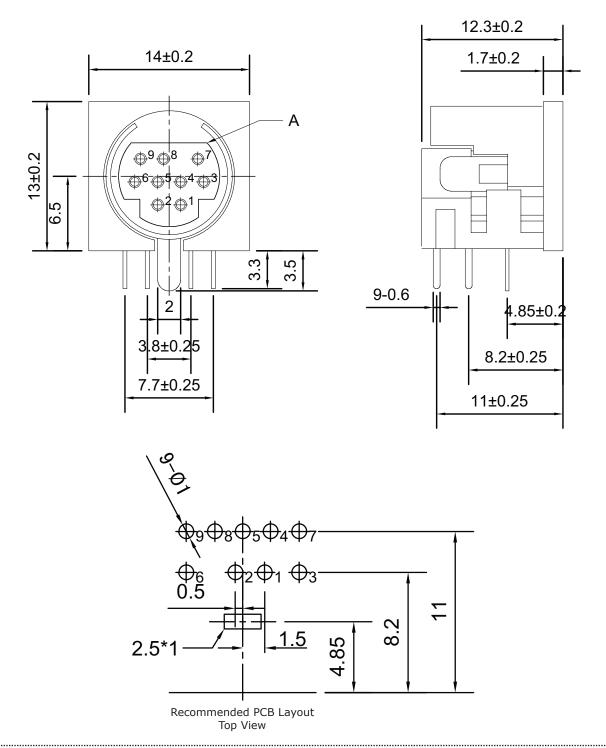

Additional Resources: Product Page | 3D Model | PCB Footprint

CUI Devices | SERIES: MD-S | DESCRIPTION: MINI DIN CONNECTOR date 09/01/2020 | page 5 of 5

REVISION HISTORY

rev.	description	date
1.0	initial release	02/23/2006
1.01	new template applied	02/16/2012
1.02	housing updates	03/29/2012
1.03	updated datasheet	08/25/2017
1.04	discontinued models MD-30S and MD-50S, brand update	10/08/2019
1.05	updated housing	12/12/2019
1.06	updated PCB footprints	09/01/2020

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular DIN Connectors category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below:

60KD4M M83723/76W22326 M83723/78R22327 75-069228-21J 7519021610P 75-190224-28S 7547401103P 75-474014-07L
803000A09M040 88-559975-75P 88-569735-06P 8R3006A18M0033 GTC00G-24-7S PT05A-14-5SX PT05A1832SW PT05E2255PW
GTC030-20-27PW-LC GTC030A-20-33S 1211290078 1211810025 1211290084 1211500027 ACS06AF-16-10P(003) D38999/40WD35PN
D38999/44WD35BN D38999/44WH21AN D38999/44WH35AN D38999/44WJ35PN 12DL6MX AFD57-22-12S-6141 MS3102R18-1PZ
MS3102R28-22PZ MS3112E20-24P MS3114F10-6P MS3116E8-4SW MS3122E14-19P MS3456W28-21PZ-LC 171-2603 17DN100-EX
C015-50C006-100-1 NYS322AG CA3100F18-10SB CA3100F18-1SB CA3102E12S-3P CA3102E18-12SWB CA3102E20-18P
CA3102E20-27P CA3102E20-33P CA3102E20-7P CA3102E24-28PB-F80-A176