CUI DEVICES

date 08/11/2020

page 1 of 5

SERIES: MD-SM | **DESCRIPTION:** MINI DIN CONNECTOR


FEATURES

- PCB mount
- right angle
- side shielded





PART NUMBER KEY



SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated input voltage			30		Vdc
rated input current				1	А
contact resistance				30	mΩ
insulation resistance		1000			МΩ
voltage withstand	for 1 minute			500	Vac
insertion force				45	N
withdrawal force		7			N
operating temperature		-25		50	°C
life			500		cycles
flammability rating	UL94V-0				
RoHS	yes				


SOLDERABILITY


parameter	conditions/description	min	typ	max	units
hand soldering	for 1~3 seconds	230		250	°C


MECHANICAL DRAWINGS (MD-30SM, MD-40SM, MD-50SM)

units: mm tolerance: $X.X \pm 0.38 \text{ mm}$ $X.XX \pm 0.25 mm$ $X.XXX \pm 0.13 mm$

	MATERIAL	PLATING
body	PBT+30%GF (UL94V-0)	
pins	brass	tin
shield	brass	nickel






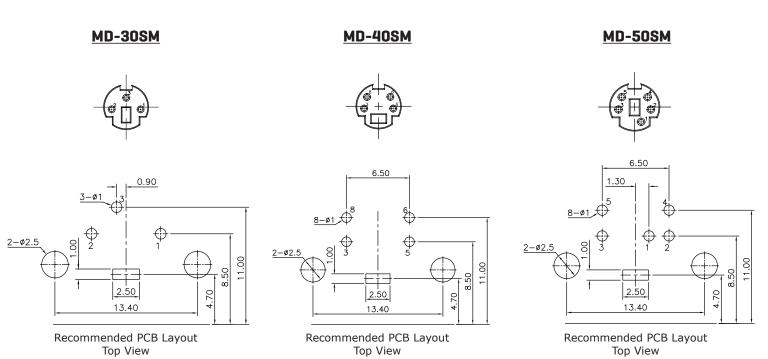



MECHANICAL DRAWINGS (MD-60SM, MD-70SM, MD-80SM)

units: mm tolerance: $X.X \pm 0.38 \text{ mm}$ $X.XX \pm 0.25 \text{ mm}$ $X.XXX \pm 0.13 \text{ mm}$

	MATERIAL	PLATING
body	PBT+30%GF (UL94V-0)	
pins	brass	tin
shield	brass	nickel






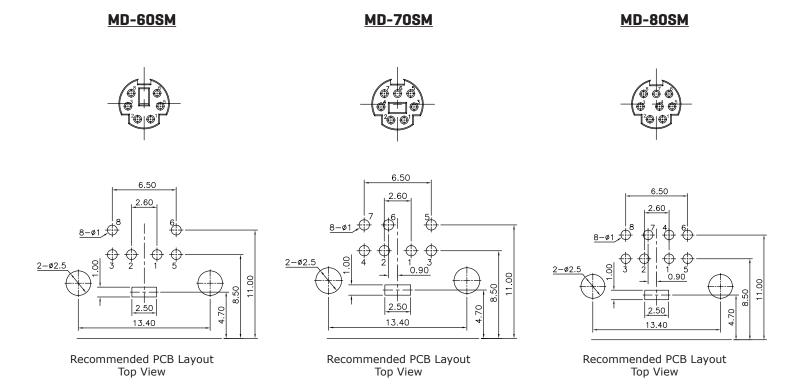



MECHANICAL DRAWING (MD-90SM)


units: mm tolerance: $X.X \pm 0.35 \text{ mm}$ $X.XX \pm 0.25 mm$ $X.XXX \pm 0.15 mm$

	MATERIAL	PLATING
body	PBT (UL94V-0)	
cover	PBT (UL94V-0)	
ground	brass	tin
pins	brass	tin
shield	brass	tin



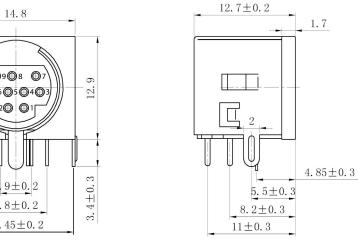





Additional Resources: Product Page | 3D Model | PCB Footprint

CUI Devices | SERIES: MD-SM | DESCRIPTION: MINI DIN CONNECTOR date 08/11/2020 | page 5 of 5

REVISION HISTORY

rev.	description	date	
1.0	initial release	02/23/2006	
1.01	new template applied	02/22/2012	
1.02	updated datasheet	08/25/2017	
1.03	added hand soldering details	01/19/2018	
1.04	updated housing, brand update	11/21/2019	
1.05	updated PCB footprints	08/11/2020	

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular DIN Connectors category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below:

60KD4M M83723/76W22326 M83723/78R22327 75-069228-21J 7519021610P 75-190224-28S 7547401103P 75-474014-07L 88-559975-75P 88-569735-06P 8R3006A18M0033 PT02E1283P GTC00G-24-7S PT05A-14-5SX GTC030-20-27PW-LC GTC030A-20-33S 1211290078 1211810025 1210503216 1211290084 1211500027 ACS06AF-16-10P(003) D38999/40WD35PN D38999/44WD35BN D38999/44WH21AN D38999/44WH35AN D38999/44WJ35PN 12DL6MX AFD57-22-12S-6141 MS3102R18-1PZ MS3102R28-22PZ MS3112E20-24P MS3114F10-6P MS3116E8-4SW MS3122E14-19P MS3456W28-21PZ-LC 171-2603 17DN100-EX C015-50C006-100-1 NYS322AG CA3100E18-1SBF80A176 CA3100F18-10SB CA3100F18-1SB CA3101E18-10SBF80 CA3101E18-12SB CA3102E12S-3P CA3102E14S-2P CA3102E14S-6P CA3102E18-12SWB CA3102E20-27P