CUI DEVICES

SERIES: RDS-1055-SMT | DESCRIPTION: ROTARY DIP SWITCH

FEATURES

- 10 and 16 positions
- flat actuator
- gold plated terminals
- surface mount
- tube or tape and reel packaging




SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage	switching non-switching			24 50	Vdc Vdc
rated current	switching non-switching			25 100	mA mA
withstanding voltage	for 1 minute		250		Vac
contact resistance	initial after life test			50 100	mΩ mΩ
insulation resistance	at 250 Vdc	100			MΩ
operating torque				500	gf*cm
dial travel	continuous rotation		360		degrees
operating temperature		-40		85	°C
storage temperature		-40		85	°C
life		10,000			steps
flammability rating	UL94V-0				
RoHS	yes				

PART NUMBER KEY


.....




"blank" = Tube TR = Tape and Reel

MECHANICAL DRAWING


units: mm tolerance: X≤0.5: ±0.25 mm 0.5<X≤3.0: ±0.15 mm 3.0<X≤6.0: ±0.20 mm 6.0<X≤30.0: ±0.25 mm 30.0<X≤120.0: ±0.30 mm 120.0<X≤400.0: ±0.50 mm X>400.0: ±0.80 mm unless otherwise noted




ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
1	dial	PA9T (UL94V-0)	gray
2	housing	PA9T (UL94V-0)	black
3	base	PA9T (UL94V-0)	black
4	terminals	copper alloy	gold

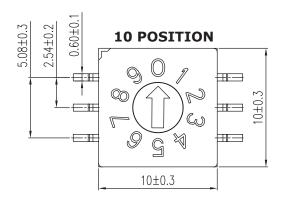


ON	0					
OFF	•		CODE			
TYF	PE	POS	1	2	4	8
		0	•	•	•	•
		1	0	•	•	•
		2	•	0	•	•
		3	0	0	•	•
		4	•	•	0	•
	10 STEP	5	0	•	0	•
		6	•	0	0	•
		7	0	0	0	•
		8	•	•	•	0
		9	0	•	•	0
		А	•	0	•	0
	ĺ	В	0	0	•	0
	16 6750	С	٠	•	0	0
	16 STEP	D	0	•	0	0
		E	•	0	0	0
		F	0	0	0	0

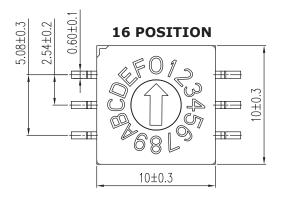

.....

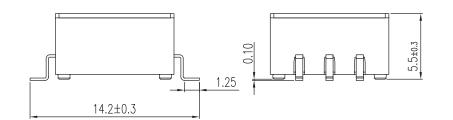

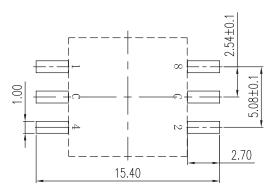


Recommended PCB Layout Top View

.....

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 3 seconds	315	320	325	°C
reflow soldering ¹	240~260 °C (20 seconds max)			260	°C

Notes: 1. It is recommended to reflow solder within 6 months.

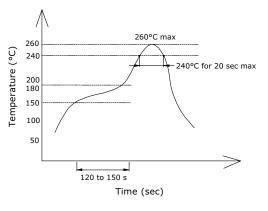



PACKAGING (TUBE)

.....

units: mm

Tube Size: 17.50 x 12.50 x 500 mm Tube QTY: 47 pcs

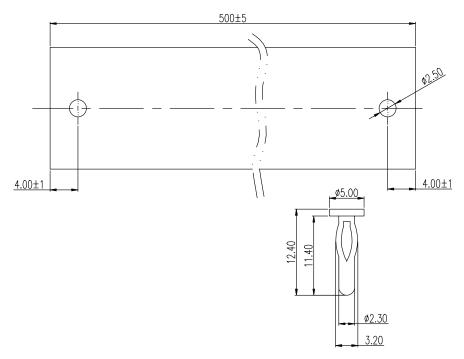




.....

PACKAGING (TAPE & REEL)

units: mm

Reel Size: Ø330 mm Reel QTY: 450 pcs

.....

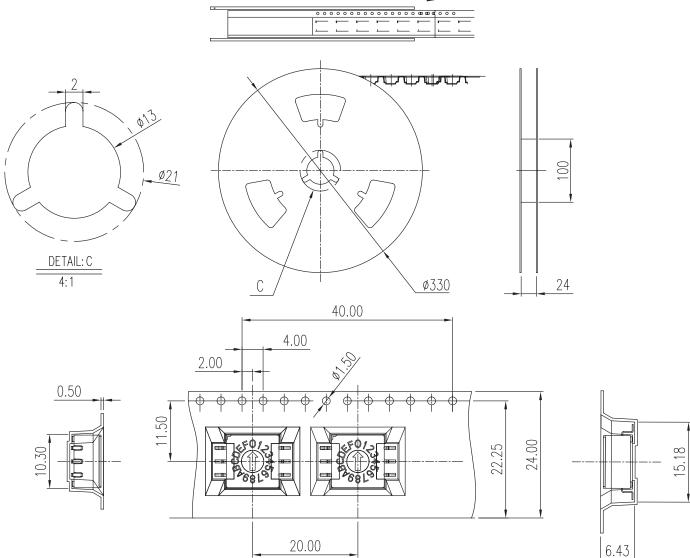

REVISION HISTORY

rev.	description	date
1.0	initial release	05/21/2020

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Coded Rotary Switches category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below :

94HCB08W 94HCB10WR PT65503RT P60AS703 P60A503 P65THR101L254 RTE16 LFTSVTPL 13613 GSDR-10S CRD10CM0SBR DRS4116 RTE1600R44 ERD110RSZ ERD116CSZ ERD116RSZ ERD716M06Z 94HBB16WT 94HBB10WT 94HAC10T 94HAB16T 94HAB10WT 94HAB10RAT 94HAB08WT ERD216RSZ ND3FR10P DRR3110 S-4010TA 94HCB16WT 94HCB16T 94HCB10RAT 94HCB08T 94HAB16RAT 94HAB10T 94HAB08T S-2031A S-1010A RTE1000V14 RTBH31BS10ANNZP PT65501L254 PT65127L254 PT65502L508 1-1825007-1 1-1825007-6 ND3FR16B ND3FR16P-R SMR14116 RTE0400N04 RTE1000N14 RTE1002G14 RTE1002N14 RTE1010N14