

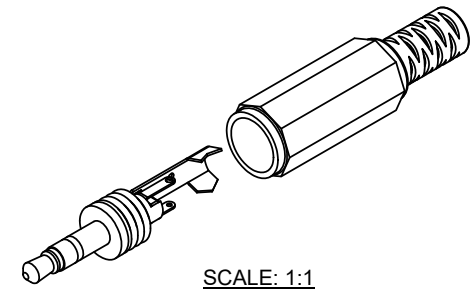


| REV. | DESCRIPTION | DATE |
|------|-------------------|------------|
| A | NEW DRAWING | 1/9/2008 |
| B | updated datasheet | 02/22/2019 |

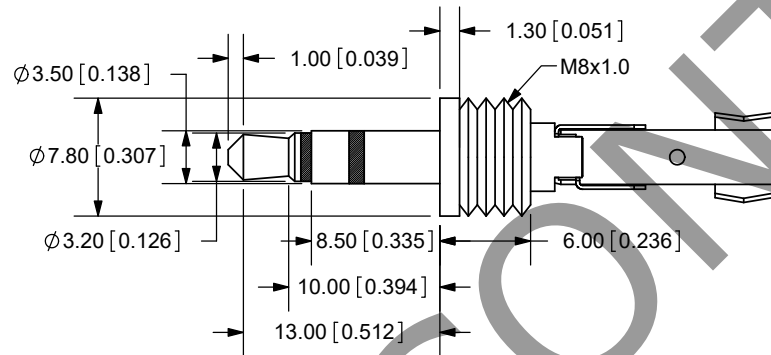

SCALE: 1:1

TOLERANCE:
±0.3mm UNLESS OTHERWISE
SPECIFIED

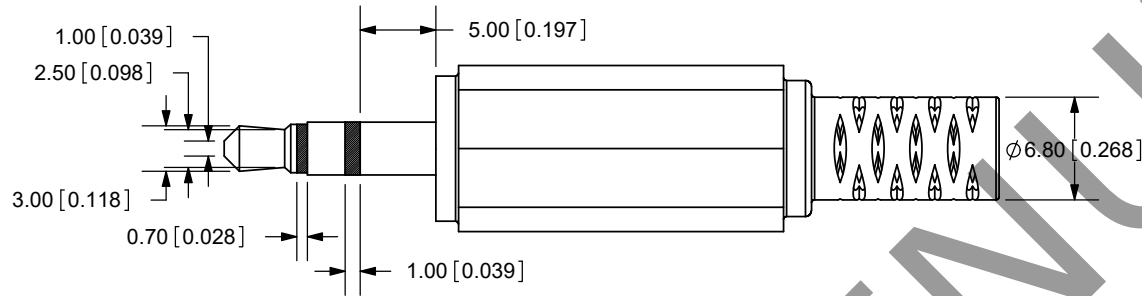

SPECIFICATIONS:
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100 M OHMS MIN
VOLTAGE RATING: 24 VDC / 1 A

| | MATERIAL | PLATING |
|----------------|----------|-------------|
| RING TERMINAL | Brass | Nickel |
| TIP TERMINAL | Brass | Nickel |
| EARTH TERMINAL | Brass | Nickel |
| SLEEVE | Brass | Nickel |
| CONTACT HEAD | Brass | Nickel |
| INSULATOR | POM | black color |
| BODY | PE | black color |



CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

| | |
|--------------------------|--------------------|
| TITLE: 3.5mm STEREO PLUG | REV: B |
| PART NO. SP-3501 | UNITS: MM [INCHES] |
| DRAWN BY: ZRJ | APPROVED BY: |
| | SCALE: 2:1 |

PC FILE NAME:
SP-3501

COPYRIGHT 2008 BY CUI INC.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Phone Connectors](#) category:

Click to view products by [CUI Devices](#) manufacturer:

Other Similar products are found below :

[M444B](#) [6J1041A](#) [R4F](#) [E12BPKG](#) [ECP4PKG](#) [163-157J-E](#) [MT333X](#) [171-0350-EX](#) [171-101A-EX](#) [171-3325-EX](#) [176S](#) [NC3MG-V](#)
[NS112BX](#) [NYS228G](#) [P10834](#) [P2380](#) [P2381X](#) [P2411X](#) [P2412](#) [P2724](#) [JM2PB-AU BULK](#) [9144](#) [S2674](#) [280L](#) [163-158N-2-E](#) [171-3308-EX](#)
[171-3500-E](#) [ST-3141-5N](#) [2501FT](#) [CMT335](#) [M10662](#) [330Q](#) [RJ5VI-S](#) [40116](#) [TM1R-AU](#) [TM2PBMJ-AU](#) [TM2PJ-AU](#) [TM2PJ-AU BULK](#)
[4803.1351](#) [49201](#) [49205](#) [TS3PBJ-AU](#) [TS3PBMJ-AU](#) [TT32BX](#) [54B](#) [C55BX](#) [40112](#) [40205](#) [415](#) [XMT332B](#)