# **CUI** DEVICES

**date** 04/20/2020

page 1 of 3

**SERIES:** TB002V-500 | **DESCRIPTION:** TERMINAL BLOCK

#### **FEATURES**

- 2~24 poles
- · vertical with board
- interlocking (side)
- 5.0 mm pitch
- UL and CE safety approvals















### **SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage (per contact)	UL			300	V
rated voltage (per contact)	IEC			250	V
rated current (per contact)	UL			15	Α
	IEC			17.5	Α
withstanding voltage			2500		Vac
surge voltage				4000	V
contact resistance				20	mΩ
insulation resistance	at 500 Vdc	500			МΩ
operating temperature		-40		105	°C
safety approvals	UL 1059, EN 60998-1:2004, EN 60998-2-1:2004				
flammability rating	UL94V-0				
RoHS	yes				

### **SOLDERABILITY**

parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 10 seconds	345	350	355	°C
wave soldering	for maximum 5 seconds	255	260	265	°C

### **PART NUMBER KEY**

## TB002V-500 - X XX XX

Base Number

Screw Type: "blank" = Slot P = Phillips No. of Poles: 02 10 18 03 11 19

Color:
\*BE = blue
GR = green

04 12 20 OR = orange 05 13 21 YL = yellow 06 14 22 GY = gray

 $\frac{14}{15} = \frac{14}{15} = \frac{14$ 


08 16 24 09 17

\*Standard housing color is blue. All other colors are subject to higher MOQ. Please inquire with CUI Devices sales for details.

### **MECHANICAL DRAWING**

units: mm tolerance (per module): X≤6.00: ±0.25 mm 6.00<X≤30.00: ±0.40 mm unless otherwise noted

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	PA66 (UL94V-0)	
contacts	copper alloy	tin
screws	steel	zinc
spring	stainless steel	

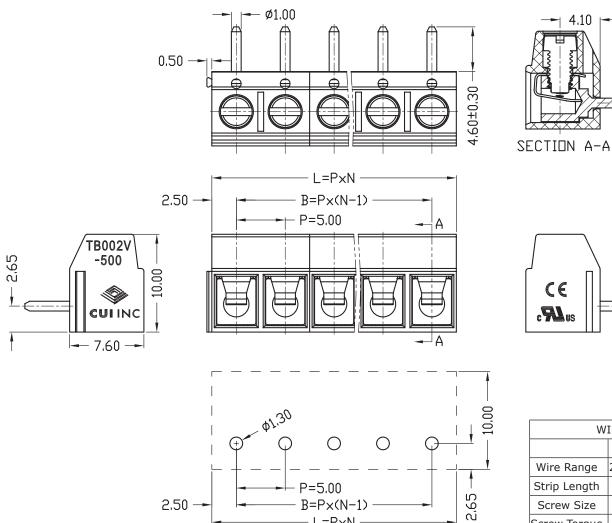

WIRE ASSEMBLY							
	UL	IEC					
Wire Range	22~12 AWG	1.5 mm <sup>2</sup>					
Strip Length	5~6 mm						
Screw Size	M2.5						
Screw Torque 0.4 N⋅m							

This se	This series can be constructed of 2 and 3 pole modules where L is the total length, P is the pitch, and N is the number of poles.											
N	02	03	04	05	06	07	08	09	10	11	12	13
L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00
В	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
N	14	15	16	17	18	19	20	21	22	23	24	
L	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00	
В	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	

- L=P×N -PCB LAYOUT Additional Resources: Product Page | 3D Model | PCB Footprint

CUI Devices | SERIES: TB002V-500 | DESCRIPTION: TERMINAL BLOCK date 04/20/2020 | page 3 of 3

### **REVISION HISTORY**

rev.	description	date
1.0	initial release	03/14/2019
1.01	brand update	02/06/2020
1.02	updated datasheet	04/20/2020

The revision history provided is for informational purposes only and is believed to be accurate.

# **CUI** DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Terminal Blocks category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below:

MBE-1512 MBE-154 MBE-156 MBES-153 MBES-156 MH-2512 MHE-132 MHE-163 MI-254 (35) MI-272 880507 MPT-275

15602-04-08-21 ELM023100 BA311TU BA411SU MV-152 MV-252-D MV-253/NCNOC MV-254-D MV-255 MV-462 MV-493 MVE
253 MVE-273 MVEB-153 1700096 1705142 1712417 1713020 1713088 1745195 1760594 1776118-2 1790852 1-796689-8 1-796692-6

1800001 1800114 1995279 20020314-C121B01LF CB2-12 KP03215000J0G KP04215000J0G S451 282802-2 29.007 29.116 30.103

30.106