


**SERIES:** P78-2000-S | **DESCRIPTION:** NON-ISOLATED SWITCHING REGULATOR
**FEATURES**

- 2 A of output current
- high efficiency up to 95%
- EN 62368-1 certified
- no-load input current as low as 0.1 mA
- wide temperature range: -40°C ~ +85°C
- output short circuit protection
- pin-out compatible with linear regulators



MODEL	input voltage		output voltage	output current	output power	ripple and noise <sup>1,2</sup>	efficiency
	typ (Vdc)	range (Vdc)	(Vdc)	max (mA)	max (W)	max (mVp-p)	typ (%)
P7803-2000-S	24	6~36	3.3	2000	6.6	75	87
P7805-2000-S	24	8~36	5	2000	10	75	90
P7809-2000-S	24	13~36	9	2000	18	75	93
P7812-2000-S	24	16~36	12	2000	24	75	94
P7815-2000-S	24	18~36	15	2000	30	75	95

Notes: 1. Ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1  $\mu$ F ceramic and 10  $\mu$ F electrolytic capacitors on the output.  
 2. 20~100% load ripple & noise  $\leq$  100 mVp-p. 0~20% load ripple & noise  $\leq$  180 mVp-p

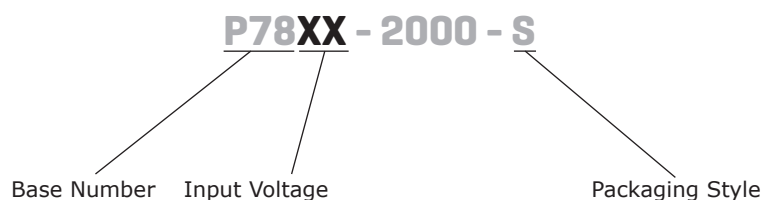**PART NUMBER KEY**

## INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	3.3 Vdc output	6	24	36	Vdc
	5.0 Vdc output	8	24	36	Vdc
no load input current	input voltage range		0.1	1	mA
filter	capacitance filter				

## OUTPUT

parameter	conditions/description	min	typ	max	units
capacitive load	3.3 V model			1800	μF
	5 V model			1000	μF
	9 V model			680	μF
	12 & 15 V models			470	μF
line regulation	input voltage range, full load		±0.4	±0.8	%
load regulation	from 10% to 100% load		±0.5	±1.5	%
voltage accuracy	100% load, input voltage range		±2	±4	%
	P7803-2000-S all other models		±2	±3	%
switching frequency	100% load, nominal input		400		kHz
transient recovery time	25% load step change		0.2	1	mS
transient response deviation	25% load step change		50	150	mV
temperature coefficient	-40°C ~ 85°C			±0.03	%/°C

## PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	continuous, automatic recovery				

## SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
safety approvals	EN62368-1				
conducted emissions	CISPR32/EN55032 class B (see fig. 4-② for recommended circuit)				
radiated emissions	CISPR32/EN55032 class B (see fig. 4-② for recommended circuit)				
ESD	IEC/EN 61000-4-2, contact ± 6kV, perf. Criteria B				
radiated immunity	IEC/EN 61000-4-3, 10V/m, perf. Criteria A				
EFT/burst	IEC/EN 61000-4-4, ± 1kV (see fig. 4-① for recommended circuit), perf. Criteria B				
surge	IEC/EN 61000-4-5, line to line ± 1kV (see fig. 4-① for recommended circuit), perf. Criteria B				
conducted immunity	IEC/EN 61000-4-6, 3 Vr.ms, perf. Criteria A				
MTBF	as per MIL-HDBK-217F @ 25°C	2,000			K hours
RoHS	2011/65/EU				

## ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		85	°C
storage temperature		-55		125	°C
storage humidity	non-condensing	5		95	%

## SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	1.5mm from case for 10 seconds			260	°C



## MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	11.50 x 9.00 x 17.50 (0.457 x 0.297 x 0.400 inch)				mm
case material	Black flame-retardant and heat-resistant plastic (UL94-V0)				
weight			3.8		g


## MECHANICAL DRAWING

units: mm [inches]  
 tolerance: ±0.25 [±0.010]  
 pin section tolerance: ±0.10 [±0.004]

PIN CONNECTIONS	
Pin	Function
1	+Vin
2	GND
3	+Vo

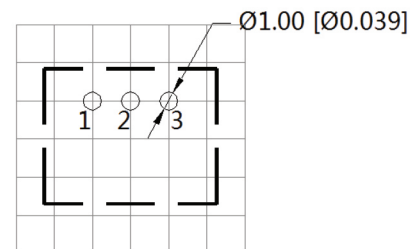
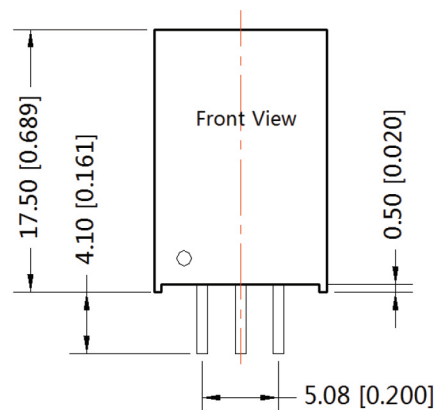


Note : Grid 2.54\*2.54mm

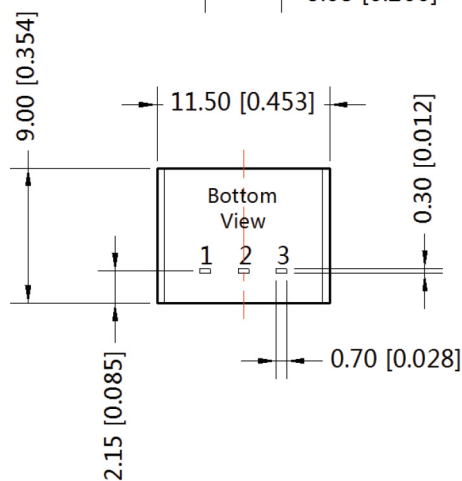


## DERATING CURVES

Figure 1

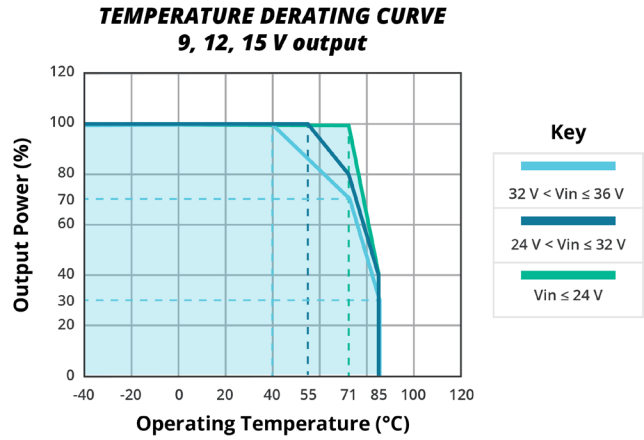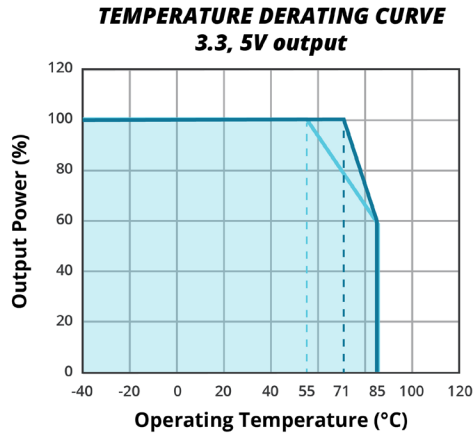


## EFFICIENCY CURVES


**EFFICIENCY VS INPUT LOAD  
P7805-2000-S (full load)**

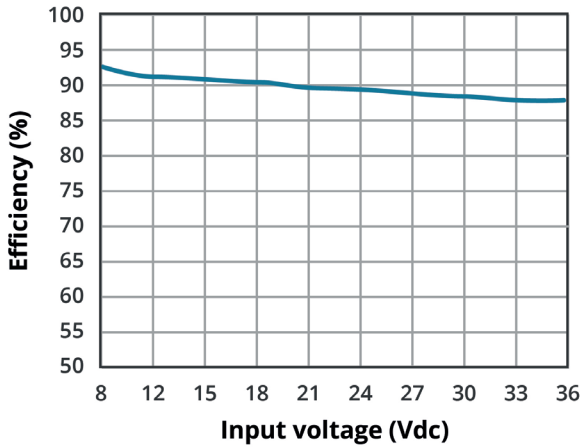


**EFFICIENCY VS OUTPUT LOAD  
P7805-2000-S ( $V_{in} = 24\text{ V}$ )**

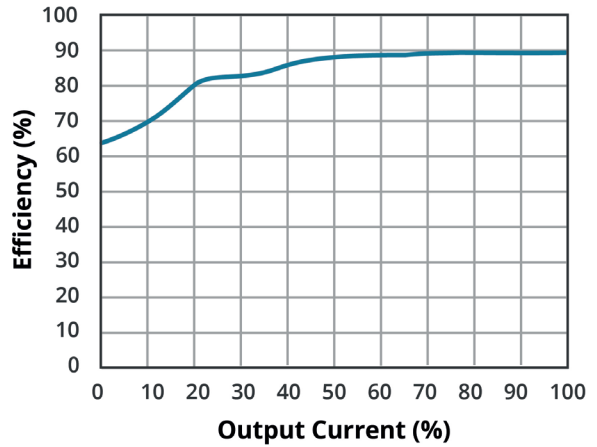

**EFFICIENCY VS INPUT LOAD  
P7815-2000-S (full load)**

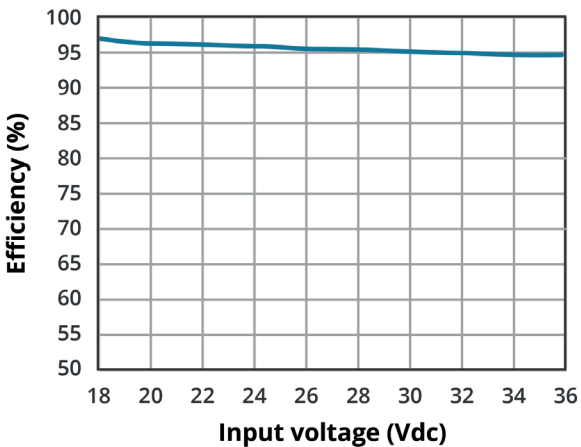

**EFFICIENCY VS OUTPUT LOAD  
P7815-2000-S ( $V_{in} = 24\text{ V}$ )**

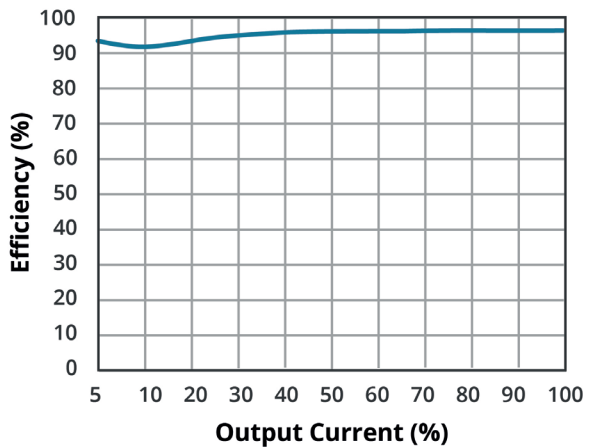

## TYPICAL APPLICATION CIRCUIT

Figure 2

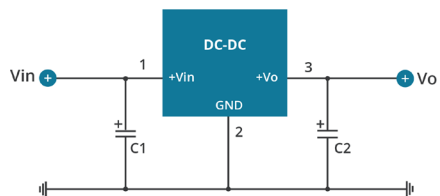


Table 1

Part No.	C1 (ceramic capacitor)	C2 (ceramic capacitor)
P7803-2000-S	22 $\mu$ F/50V	22 $\mu$ F/10V
P7805-2000-S	22 $\mu$ F/50V	22 $\mu$ F/10V
P7809-2000-S	22 $\mu$ F/50V	22 $\mu$ F/16V
P7812-2000-S	22 $\mu$ F/50V	22 $\mu$ F/25V
P7815-2000-S	22 $\mu$ F/50V	22 $\mu$ F/25V

- Note:
1. C1 and C2 are required and should be connected close to the pin terminal of the module.
  2. The capacitance of C1 and C2 refer to Sheet 1.
  3. To reduce the output ripple furtherly, C2 can be increased properly if required, tantalum capacitor and aluminum electrolytic capacitor of low ESR may also suffice.
  4. Cannot be used in parallel to enlarge the power for output and hot swap.

## EMC RECOMMENDED CIRCUIT

Figure 3

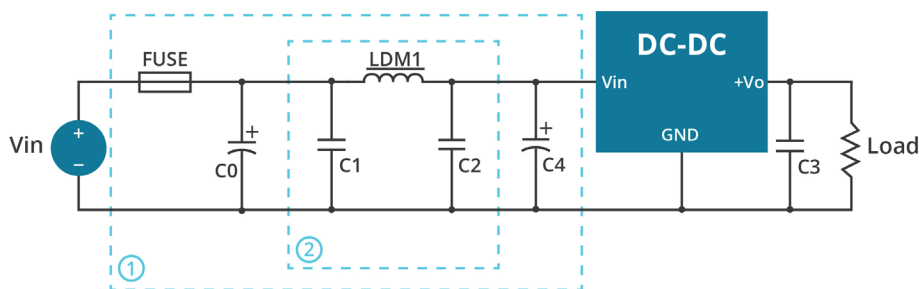


Table 2

Recommended external circuit components	
FUSE	choose according to practical input current
C0	100 $\mu$ F /100V
LDM1	22 $\mu$ H
C4	680 $\mu$ F /50V
C1/C2	10 $\mu$ F /50V
C3	22 $\mu$ F/25V

- Note: Part ① in the Fig. 4 is for EMS test, part ② is for EMI filtering; parts ① and ② can be added based on actual requirement.

## REVISION HISTORY

---

rev.	description	date
1.0	initial release	01/22/2020
1.01	logo update	02/21/2020
1.02	derating curve, efficiency curves and circuit figures updated	09/23/2021

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Non-Isolated DC/DC Converters](#) category:*

*Click to view products by [CUI Inc](#) manufacturer:*

Other Similar products are found below :

[PSR152.5-7IR](#) [APTH003A0X-SRZ](#) [SPM1004-3V3C](#) [R-785.0-05](#) [10E24-P15-10PPM](#) [1E24-P4-25PPM-SHV-5KV](#) [PROPOWER-3.3V](#)  
[MYGTM01210BZN](#) [40C24-N250-I5-H](#) [40A24-P30-E](#) [3V12-P0.8](#) [10C24-N250-I10-AQ-DA](#) [4AA24-P20-M-H](#) [3V12-N0.8](#) [3V24-P1](#) [3V24-](#)  
[N1](#) [BMR4672010/001](#) [BMR4652010/001](#) [6AA24-P30-I5-M](#) [6AA24-N30-I5-M](#) [BM2P101X-Z](#) [35A24-P30](#) [2.5M24-P1](#) [PTV03010WAD](#)  
[PTV05020WAH](#) [PTV12010LAH](#) [PTV12020WAD](#) [R-7212D](#) [R-7212P](#) [R-78AA15-0.5SMD](#) [R-78AA5.0-1.0SMD](#) [30A24-N15-E](#) [10A12-P4-](#)  
[M](#) [10C24-N250-I5](#) [10C24-P125](#) [10C24-P250-I5](#) [6A24-P20-I10-F-M-25PPM](#) [1A24-P30-F-M-C](#) [TSR 1-24150SM](#) [1/2AA24-N30-I10](#) [1C24-](#)  
[N125](#) [12C24-N250](#) [V7806-1500](#) [PTV12020LAH](#) [PTV05010WAH](#) [PTN04050CAZT](#) [PTH12020WAD](#) [PTH12020LAS](#) [PTH05050YAH](#)  
[PTH05T210WAH](#)