

SERIES: PSK-15W | **DESCRIPTION:** INTERNAL AC-DC POWER SUPPLY


FEATURES

- wide input range (85~305 Vac)
- UL/EN/IEC 62368 certified
- meets CISPR32/EN 55032 Class B without external components
- short-circuit, over-current, over-voltage protections



MODEL	output voltage	output current	output power	ripple and noise	efficiency
	(Vdc)	max (A)	max (W)	typ (mVp-p)	typ (%)
PSK-15W-3	3.3	3.0	9.9	50	73
PSK-15W-5	5	2.8	14	50	76
PSK-15W-9	9	1.6	15	50	78
PSK-15W-12	12	1.25	15	50	80
PSK-15W-15	15	1.0	15	50	80
PSK-15W-24	24	0.625	15	50	83
PSK-15W-48	48	0.32	15	50	85

PART NUMBER KEY

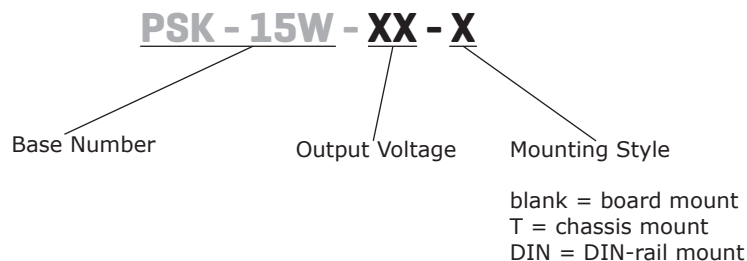

INPUT

parameter	conditions/description	min	typ	max	units
voltage		85		305	Vac
		100		430	Vdc
frequency		47		63	Hz
current	at 155 Vac			.37	A
	at 230 Vac			.22	A
inrush current	at 155 Vac		16		A
	at 230 Vac		30		A
leakage current	277 Vac			0.25	mA
no load power consumption	at 230 Vac			0.5	W
	3.3, 5, 9, 12,15, 24 output 48 output			0.55	W

OUTPUT

parameter	conditions/description	min	typ	max	units
capacitive load	3.3 Vdc output models			30,000	μF
	5 Vdc output models			16,000	
	9 Vdc output models			5,500	
	12 Vdc output models			4,500	
	15 Vdc output models			4,000	
	24 Vdc output models 48 Vdc output models			800 220	
output voltage accuracy	all load range				
	3.3 V output all other models		±3 ±2		% %
line regulation	rated load		±0.5		%
load regulation	0~100% load		±1.0		%
hold-up time	at 155 Vac		5		ms
	at 230 Vac		40		ms
temperature coefficient			±0.02		%/°C

PROTECTIONS


parameter	conditions/description	min	typ	max	units
over voltage protection	3.3 / 5 Vdc output models			7.5	Vdc
	9 Vdc output models			15	
	12 / 15 Vdc output models			20	
	24 Vdc output models 48 Vdc output models			30 60	
over current protection	self recovery	150		300	Io%
short circuit protection	hiccup, continuous, self recovery				

SAFETY & COMPLIANCE


parameter	conditions/description	min	typ	max	units
isolation voltage	input to output	4,000			Vac
safety approvals	IEC 62368/EN 62368/UL 62368				
safety class	Class II				
EMI/EMC	CISPR 32/EN 55032: 2015 Class B				
ESD	IEC/EN 61000-4-2 Contact ±6KV/ Air ±8KV, perf. Criteria B				
radiated immunity	EC/EN 61000-4-3 10V/m, perf. Criteria A				
EFT/burst	IEC/EN 61000-4-4 ±2KV IEC/EN 61000-4-4 ±4KV, perf. Criteria B, see recommended EMC circuit				
surge	IEC/EN 61000-4-5, line to line ±1KV, perf. Criteria B IEC/EN 61000-4-5, line to line ±2kV, line to ground ±4kV perf. Criteria B, see recommended EMC circuit				
conducted immunity	EC/EN 61000-4-6 10Vr.m.s, perf. Criteria A				
MTBF	as per MIL-HDBK-217F @ 25°C	300,000			hours
RoHS	yes				

DERATING CURVE

**TEMPERATURE DERATING CURVE
(85~305 Vac/100~430 Vdc)**

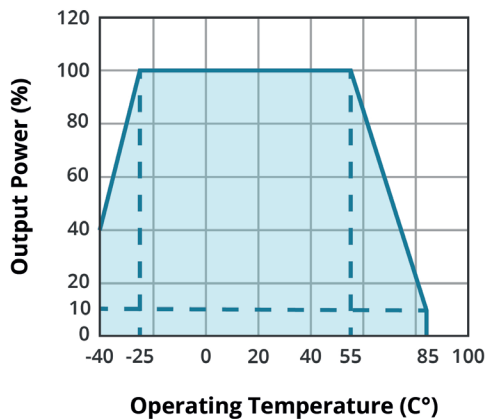


**TEMPERATURE DERATING CURVE
(25°C)**

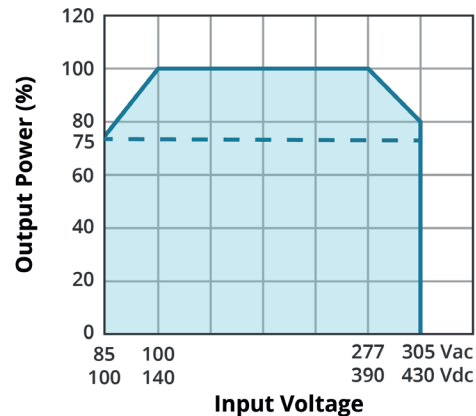


EFFICIENCY CURVES

EFFICIENCY VS INPUT VOLTAGE (Full load)

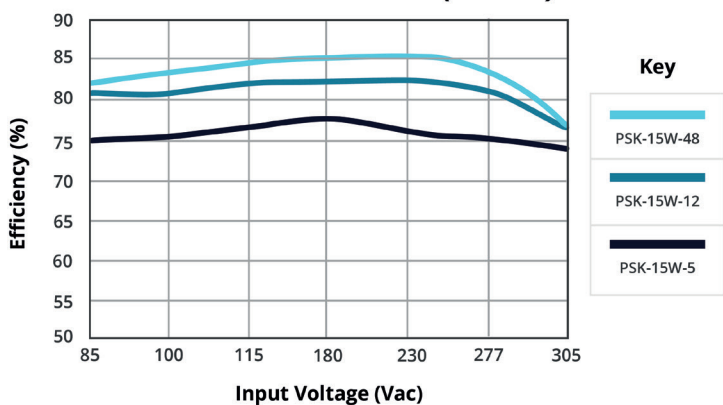

EFFICIENCY VS OUTPUT LOAD (Vin = 230 Vac)

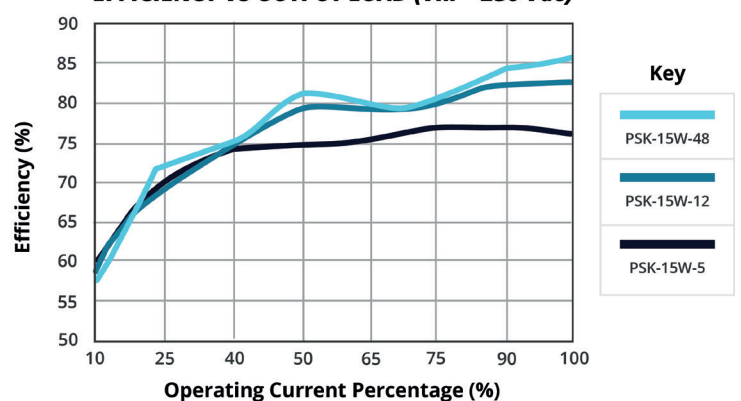

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature		-40		85	°C
storage temperature		-40		105	°C
storage humidity	non-condensing	0		95	%

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	for 5~10 seconds	255	260	265	°C
hand soldering	for 3~5 seconds	350	360	370	°C


MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	62.00 x 45.00 x 22.50 (board mount)				mm
	96.10 x 54.00 x 31.00 (chassis mount)				mm
	96.10 x 54.00 x 35.60 (DIN-rail)				mm
weight	board mount		90		g
	chassis mount		140		g
	DIN-rail		180		g
cooling	free air convection				
case material	Black plastic, flame-retardant and heat-resistant (UL94V-0)				

MECHANICAL DRAWING (BOARD MOUNT)

units: mm [inch]
 tolerance: ±0.50 [±0.020]
 pin diameter tolerances: ±0.10 [±0.004]


PIN CONNECTIONS	
PIN	Function
1	no pin
2	AC (N)
3	AC (L)
4	+Vo
5	no pin
6	no pin
7	no pin
8	-Vo

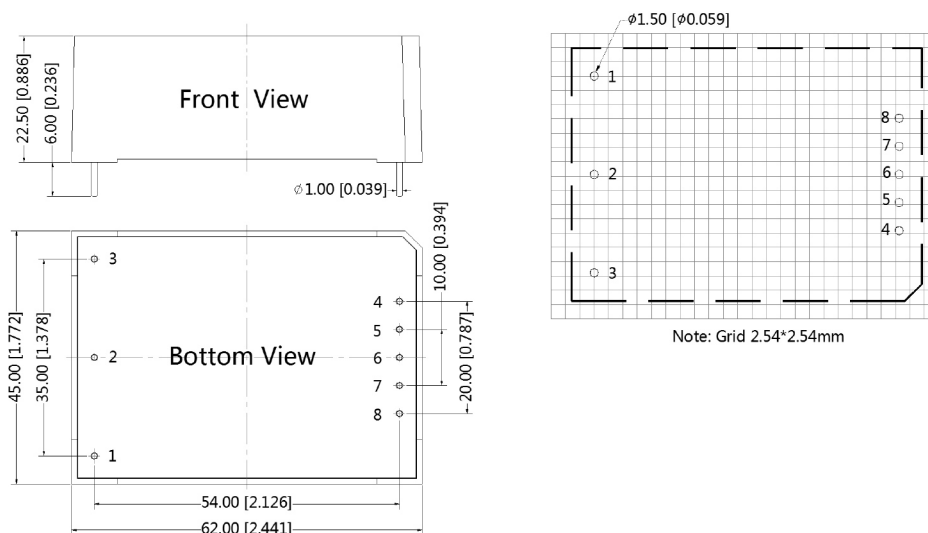

MECHANICAL DRAWING [CHASSIS MOUNT]

units: mm [inch]
 tolerance: ± 1.0 [± 0.040]
 wire range: 24~12 AWG
 tightening torque: max 0.4 N·m


PIN CONNECTIONS	
PIN	Function
1	NC
2	AC (N)
3	AC (L)
4	+Vo
5	NC
6	NC
7	NC
8	-Vo

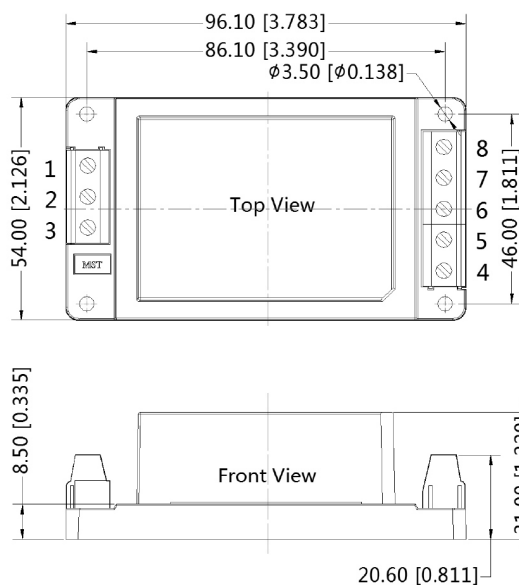

MECHANICAL DRAWING [DIN-RAIL MOUNT]

units: mm [inch]
 tolerance: ± 1.00 [± 0.040]
 wire range: 24~12 AWG
 tightening torque: max 0.4 N·m

PIN CONNECTIONS	
PIN	Function
1	NC
2	AC (N)
3	AC (L)
4	+Vo
5	NC
6	NC
7	NC
8	-Vo

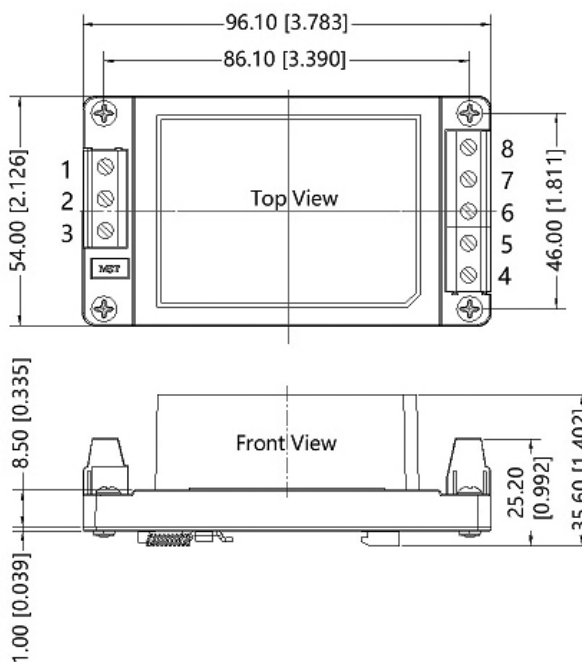

APPLICATION CIRCUIT

Figure 1

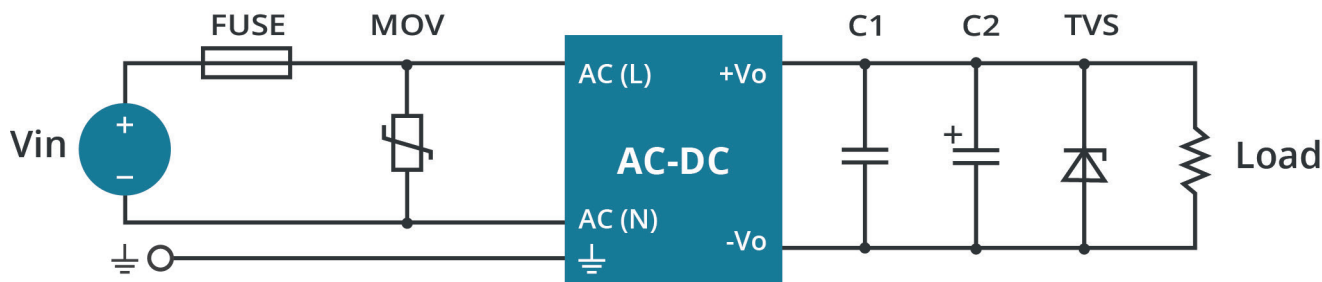


Table 1

Recommended External Circuit Components					
Vo (Vdc)	FUSE ⁶	MOV ⁶	C1	C2	TVS
3.3	2A/300V	S14K350	1 μ F	680 μ F	SMBJ7.0A
5	2A/300V	S14K350	1 μ F	680 μ F	SMBJ7.0A
9	2A/300V	S14K350	1 μ F	470 μ F	SMBJ12A
12	2A/300V	S14K350	1 μ F	220 μ F	SMBJ20A
15	2A/300V	S14K350	1 μ F	220 μ F	SMBJ20A
24	2A/300V	S14K350	1 μ F	68 μ F	SMBJ30A
48	2A/300V	S14K350	1 μ F	33 μ F	SMBJ64A

Notes: 6. Chassis Mount and DIN-Rail Mount versions include the fuse and MOV components.

EMC RECOMMENDED CIRCUIT

Figure 2

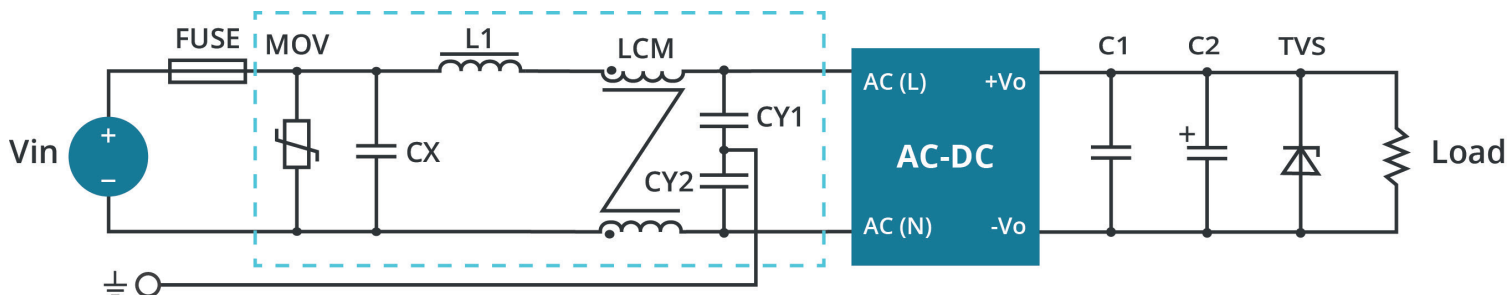


Table 2

Recommended External Circuit Components	
MOV	S14K350
CY1/CY2	1000 pF/400 Vac
CX	0.1 μ F/310 Vac
LCM	10 mH
L1	4.7 μ H/ 2 A
FUSE	2 A/300 V, slow blow, required

Note: Also refer to Table 1.

Notes: 7. C1 is a ceramic capacitor used to filter high frequency noise.
 8. C2 is an electrolytic capacitor and it is recommended to be high frequency and low impedance. For capacitance and current of capacitor, refer to the datasheet provided by the manufacturer. Voltage derating of capacitor should be at least 80%.
 9. TVS is a recommended component to protect post-circuits (if converter fails).

REVISION HISTORY

rev.	description	date
1.0	initial release	06/30/2020
1.01	figure and circuit drawings updated	02/24/2021
1.02	din-rail mount mechanical drawing updated	04/28/2021

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [CUI Inc](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)