

**SERIES:** SUA-A | **DESCRIPTION:** EXTERNAL USB ADAPTER


**FEATURES**

- USB-A receptacle to USB-C plug
- enables USB-A plug to connect to USB-C receptacle
- passive power connection
- connects USB-C power to USB-A power



MODEL	input connector type	output connector type	current rating max (A)
SUA-A	USB-C	USB-A	3.5

**PART NUMBER KEY**

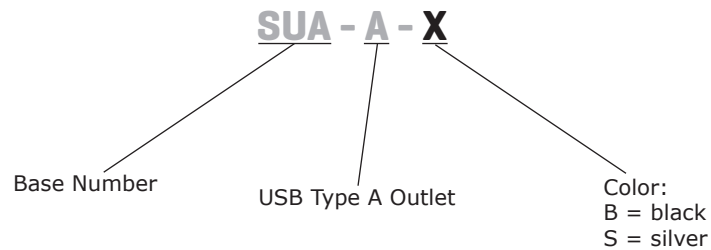

**ELECTRICAL**

parameter	conditions/description	min	typ	max	units
insulation				2	$\Omega$
resistance	300 Vdc for 1 ms max		10		M $\Omega$
current		2.1		3.5	A

**MECHANICAL**

parameter	conditions/description	min	typ	max	units
insertion force	USB-A			35	N
	USB-C	5		20	N
removal force	USB-A			10	N
	USB-C	8		20	N
mating cycles	USB-A		1,500		
	USB-C		10,000		
dimensions	28.5 (L) x 16.0 (W) x 8.0 (H)				mm

**ENVIROMENTAL**


parameter	conditions/description	min	typ	max	units
operating temperature		-20		70	$^{\circ}\text{C}$

**SAFETY & COMPLIANCE**

parameter	conditions/description	min	typ	max	units
RoHS	yes				

**MECHANICAL DRAWING**

units: mm

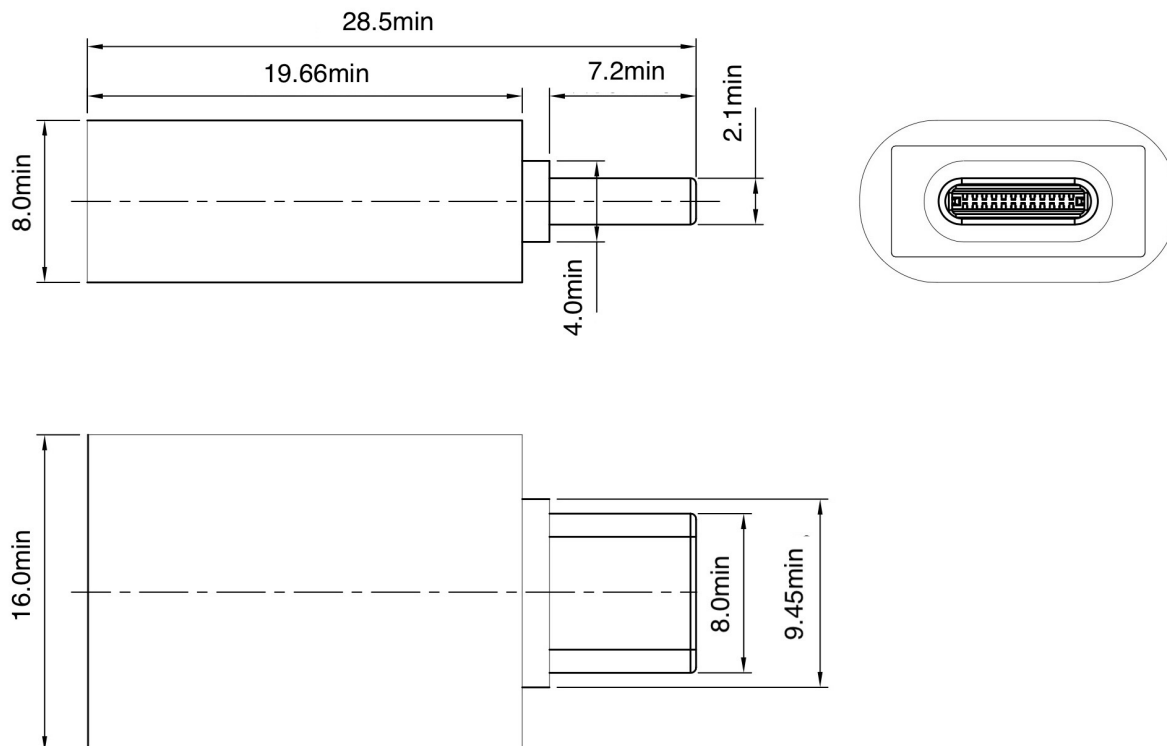

## REVISION HISTORY

rev.	description	date
1.0	initial release	05/17/2024
1.01	mechanical drawing and dimensions updated	09/28/2024

The revision history provided is for informational purposes only and is believed to be accurate.



# CUI INC

a bel group

#### Headquarters

15575 SW Sequoia Pkwy #100  
Portland, OR 97224

**800.275.4899**

Fax 503.612.2383

**cui.com**

techsupport@cui.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Connectors](#) category:*

*Click to view products by [CUI Inc](#) manufacturer:*

Other Similar products are found below :

[950](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#) [CIR06BRT-20-33P-F80-VO](#) [CIR06BRT-20-33PZ-F80-VO](#) [30-470](#) [30-489](#) [30-541](#) [A-USB A-2P-C](#) [MIKROE-1451](#) [USBFTVSCCG](#) [4689-1](#) [1-1734084-2](#) [10135326-001LF](#) [4198](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#) [17-200011](#) [UB-20AFMM-LL7A01](#) [1040870124](#) [CAP-WCCMLPB1](#) [CAP-WCCMLPC1](#) [2274475-3](#) [UB-20BMFA-SL8001](#) [UB-20BFM-SA7A02](#) [914-614A2025S10200](#) [MUSBR-AHD2-M41-SK](#) [ZX40-B-5S-1500-STD\(30\)](#) [GSB3116344HR](#) [GSB343K331HR](#) [USB3FTV2SAZNF459](#) [USBF21GSCC](#) [U221-041N-1WVS62-F5D](#) [HYCW153-USBD05-500B](#) [HYCW219-USBD05-075B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#) [HYCW204-USBD05-108B](#) [HYCW214-USBA04-113B](#) [HYCW213-USBA04-113B](#)