


SERIES: VHE100W | DESCRIPTION: DC-DC CONVERTER


FEATURES

- up to 100 W isolated output
- industry standard half brick package
- 4:1 input range (9~36 V, 18~75 V)
- single output from 3.3~48 V
- 1,500 V isolation
- tantalum free capacitors used
- over current, over temperature, over voltage, and short circuit protections
- remote on/off
- very high efficiency up to 93%



MODEL	input voltage range (Vdc)	output voltage (Vdc)	output current max (A)	output power max (W)	ripple and noise ¹ max (mVp-p)	efficiency typ (%)
VHE100W-Q24-S3R3	9 ~ 36	3.3	25	82.5	100	87
VHE100W-Q24-S5	9 ~ 36	5	20	100	100	89.5
VHE100W-Q24-S12	9 ~ 36	12	8.4	100	120	90.5
VHE100W-Q24-S15	9 ~ 36	15	6.7	100	120	90.5
VHE100W-Q24-S24	9 ~ 36	24	4.2	100	240	89
VHE100W-Q24-S48	9 ~ 36	48	2.1	100	480	88.5
VHE100W-Q48-S3R3	18 ~ 75	3.3	25	82.5	100	88
VHE100W-Q48-S5	18 ~ 75	5	20	100	100	92
VHE100W-Q48-S12	18 ~ 75	12	8.4	100	120	93
VHE100W-Q48-S15	18 ~ 75	15	6.7	100	120	92.5
VHE100W-Q48-S24	18 ~ 75	24	4.2	100	240	91
VHE100W-Q48-S48	18 ~ 75	48	2.1	100	480	90.5

Notes: 1. ripple and noise are measured at 20 MHz BW with 10µF tantalum capacitor and 1µF ceramic capacitor across output

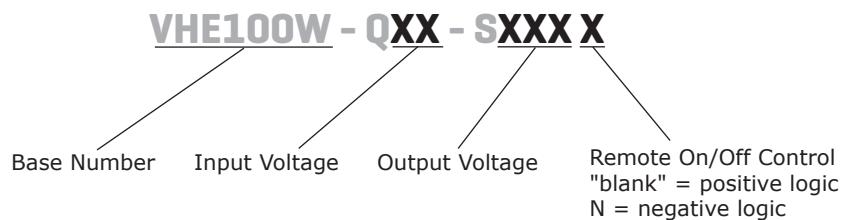PART NUMBER KEY

INPUT

parameter	conditions/description		min	typ	max	units
operating input voltage	24 V input 48 V input		9 18	24 48	36 75	Vdc Vdc
surge voltage	100 ms max.	24 V input 48 V input			50 100	Vdc Vdc
under voltage lockout	power up power down	24 V input 48 V input 24 V input 48 V input		8.8 17 8 16		Vdc Vdc Vdc Vdc

positive logic remote on/off¹

filter PI type

Notes:

1. logic compatibility, open collector ref to -input
Module ON, 3.5 ~ 75 Vdc or open circuit
Module OFF, <1.2 Vdc

2. negative logic remote on/off available
Module ON, <1.2 Vdc current limit, 110~165% nominal output
Module OFF, 3.5 ~ 75 Vdc or open circuit

OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation	measured from high line to low line			±0.2	%
load regulation	measured from full load to zero load			±0.2	%
voltage accuracy				±1.5	%
transient response	25% step load change			500	μs
adjustability				±10	%
switching frequency	100% load, input voltage range			250	kHz
temperature coefficient				±0.03	%/°C

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection	%Vo	115		140	%
short circuit protection	continuous				
current limit	% nominal output current	110		140	%
thermal shutdown case temp.				105	°C


SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output input to case output to case	1,500 1,500 1,500			Vdc Vdc Vdc
isolation resistance		10			MΩ
isolation capacitance			1,000		pF
safety approvals	UL 60950-1, CE				
RoHS compliant	yes				
MTBF	MIL-STD-217F, GB, 25°C, full load		TBD		hours

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
case operating temperature		-40		105	°C
storage temperature		-55		105	°C
humidity	non-condensing			95	%

DERATING CURVE

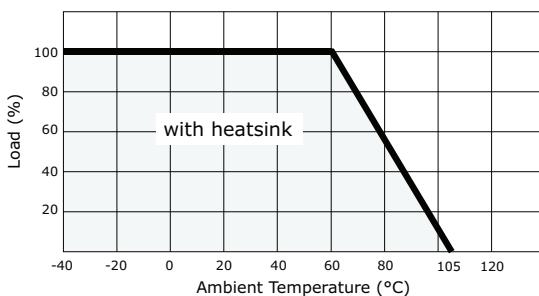

MECHANICAL


parameter	conditions/description	min	typ	max	units
dimensions	2.28 x 2.40 x 0.50 (57.9 x 61.0 x 12.7 mm)				inch
case material	aluminum				
weight		95			g

MECHANICAL DRAWING

units: inches[mm]

TOLERANCE:

inches: X.XX = ± 0.02
 X.XXX = ± 0.010
 mm: X.XX = ± 0.5
 X.XXX = ± 0.25

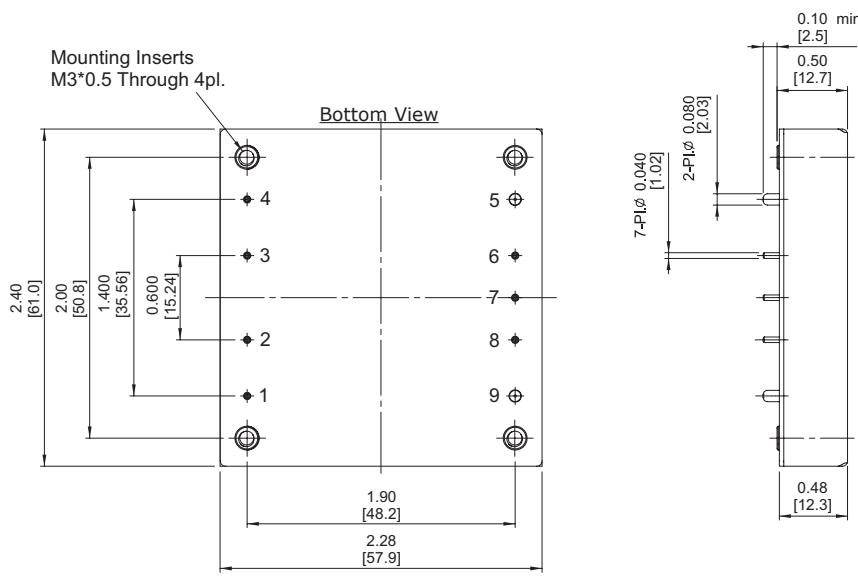

REVISION HISTORY

rev.	description	date
1.0	initial release	08/22/2012
1.01	added negative logic option to part number key	02/14/2013

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for CUI Inc manufacturer:

Other Similar products are found below :

[VFK400W-Q24-S24-DIN](#) [VFK400W-Q48-S24-DIN](#) [PPR-1U](#) [PQP3-D12-D5-D](#) [PSK-S25B-12](#) [VHB200W-Q24-S28](#) [PVB3-D24-D12-D](#)
[PYBJ6-D12-S12-D](#) [VFM-30-DIN](#) [VFM-30-T](#) [PRM1W-E12-S9-S](#) [SMI12-5-4B-P5](#) [PQP3-D12-S24-D](#) [SDI65-24-UDC-P5R](#) [VBM-360-24-CNF](#) [VHB200W-Q24-S24](#) [VHK100W-Q24-S24-DIN](#) [PBK-3-24-B](#) [VFK600-D48-S24](#) [PDQE30-Q48-S15-D](#) [VQE50W-Q48-S3R3](#) [PSK-45-24-DIN](#) [PQQ10W-Q24-S9-S](#) [PQP3-D24-D9-M](#) [PSK-S12B-24](#) [VDRS-150-48](#) [VMS-365-48](#) [VGS-350C-24](#) [PSK-60-12-DIN](#) [PSK-45-5-DIN](#) [VHK50W-Q48-S48](#) [VSUU-120-12](#) [PRF20-Q110-D15](#) [PSK-S6C-9-DIN](#) [PSK-60-48-DIN](#) [PQDE6W-Q110-S15-D](#) [PSK-25W-5-T](#) [PSK-25W-12-T](#) [PSK-25W-48-T](#) [PSK-25W-48](#) [VHK100W-Q48-S12-DIN](#) [VHK50W-Q24-S12-DIN](#) [VHK75W-Q24-S12-DIN](#) [PYBJ6-D24-S5-OM](#) [PSK-45-12-DIN](#) [PSK-S25D-24-T](#) [PSK-45-48-DIN](#) [PSK-S25D-5-T](#) [VOF-S12B-24](#) [PSK-S60B-12](#)