
Rating	10A 125VAC, 6A 250VAC 1/2HP 125/250VAC	
Configured For	12VDC 14V	
Contact Resistance		50m ohm Max.
Insulation Resistance		DC 500V 100M ohm Min.
Dielectric Strength		AC 1500V 1 minute
Operation Temp.		- 25°C ~ 85° C
Function		4P SPST ON-OFF LED Independent
Lamp Type LED 12VDC 14V No resistor		


MATERIAL:

Frame: Black, Nylon 66 Actuator: Red, PC

Terminals: Silver plated, Copper alloy Waterproof Rubber: Black, Silicone

Printed: None Waterproof: IP65

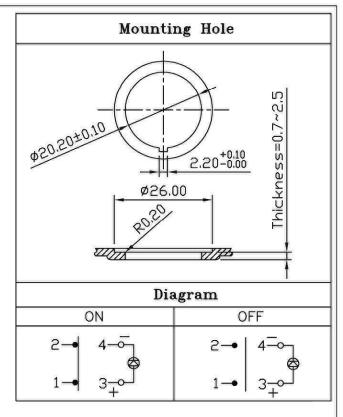

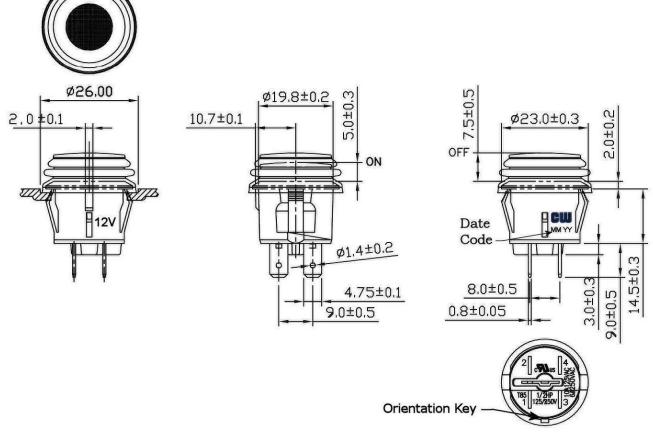

RoHS Compliant

Added 1 to end of P/N, Configured for to rating & Lamp Type to chart. 4/04/12.

Added date code 1/18/11.

INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 1/18/11

Rev. 2

Unit: mm

Checked By: G. GULD

Title:

PUSH BUTTON SWITCH

CW P/N: GPB527D2L02BR1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Switches category:

Click to view products by CW Industries manufacturer:

Other Similar products are found below:

6-1437581-1 M43R MHS123K15D MHS133K MHSS1104A MMD GH49S010001 MSS12A EPS1PC1 1825074-1 1825160-3 1825167-2 1825289-7 K232CB 25139NLDB 25449NAH SLB1240R45 1825078-1 1825080-4 1825269-1 1825270-2 STS141RA04 T2215BEN506 GH46P000001 GH46W000001 GH49P010001 25339NA M42A TG36P000000 TG36P000050 AYZ0202AG 47227LFE 49331L 50208L L203091MS02Q 4-1437581-7 X2225CR-437W 49329L 1101M1S3ZB8E2 1-1437581-1 MSS2225G04 TG39W000000 1825075-1 MSS42G TG36WS80065 T105S1CWZBE SLB124145 SLB1280R5 SLB1340R45 25136NLDB