

◆ Features

1. Excellent solderability and high heat resistance.
2. Excellent terminal strength construction.
3. Packed in embossed carrier tape and can be used by automatic mounting machine.




◆ Applications

Power supply for VCR,OA equipment ,LCD television set notebook, DC to DC converters, DC to AC inverters etc.



◆ Shape & Dimensions

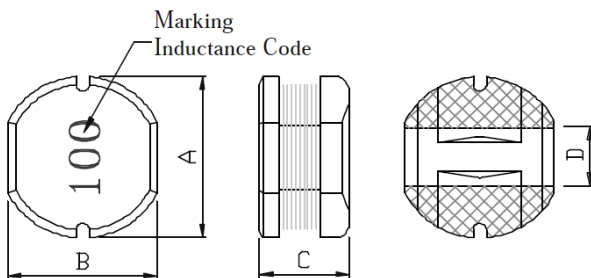

◆ Lead Free Part Numbering

CMLF 0705 - 100 M T T


(1) (2) (3) (4) (5) (6)

- (1) Series Type
- (2) Dimension: A X C
- (3) Inductance: 2R2=2.2 μ H ;
100=10 μ H; 101=100 μ H
- (4) Inductance Tolerance: K= \pm 10%, M= \pm 20%
- (5) Company Code
- (6) Packaging : packed in embossed carrier tape

Series	A (mm)	B (mm)	C (mm)	D (mm)
CMLF0705	7.8 \pm 0.3	7.0 \pm 0.3	5.0 \pm 0.3	2.1 Typ.

◆ Material

Item	Material
a. Core	Ferrite DR Core
b. Wire	Enamelled Copper wire
c. Terminal	Ag+Sn+SnPb

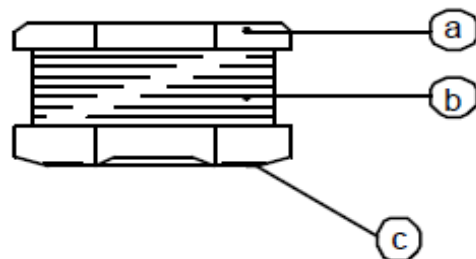

◆ Specification

Part Number 料号	Inductance(μ H) 电感量	Test Freq 测试频率	DCR(Ω) max. 直流电阻	IDC (A) max. 额定电流
CMLF0705 Series				
CMLF0705-1R0MTT	1.00 \pm 20%	100KHz/0.25V	0.030	11.25
CMLF0705-1R5MTT	1.50 \pm 20%	100KHz/0.25V	0.040	8.35
CMLF0705-2R2MTT	2.20 \pm 20%	100KHz/0.25V	0.050	6.52
CMLF0705-2R7MTT	2.70 \pm 20%	100KHz/0.25V	0.060	6.06
CMLF0705-3R3MTT	3.30 \pm 20%	100KHz/0.25V	0.060	5.26
CMLF0705-4R7MTT	4.70 \pm 20%	100KHz/0.25V	0.070	4.54
CMLF0705-5R6MTT	5.60 \pm 20%	100KHz/0.25V	0.070	4.25
CMLF0705-6R8MTT	6.80 \pm 20%	100KHz/0.25V	0.070	3.45
CMLF0705-8R2MTT	8.20 \pm 20%	100KHz/0.25V	0.070	3.30
CMLF0705-100KTT	10.0 \pm 10%	100KHz/0.25V	0.070	3.20
CMLF0705-120KTT	12.0 \pm 10%	100KHz/0.25V	0.080	2.70
CMLF0705-150KTT	15.0 \pm 10%	100KHz/0.25V	0.090	2.00
CMLF0705-180KTT	18.0 \pm 10%	100KHz/0.25V	0.100	1.90
CMLF0705-220KTT	22.0 \pm 10%	100KHz/0.25V	0.110	1.70
CMLF0705-330KTT	33.0 \pm 10%	100KHz/0.25V	0.130	1.50
CMLF0705-390KTT	39.0 \pm 10%	100KHz/0.25V	0.160	1.40
CMLF0705-470KTT	47.0 \pm 10%	100KHz/0.25V	0.180	1.30
CMLF0705-560KTT	56.0 \pm 10%	100KHz/0.25V	0.240	0.94
CMLF0705-680KTT	68.0 \pm 10%	100KHz/0.25V	0.280	0.85
CMLF0705-820KTT	82.0 \pm 10%	100KHz/0.25V	0.370	0.78
CMLF0705-101KTT	100.0 \pm 10%	100KHz/0.25V	0.430	0.72
CMLF0705-151KTT	150.0 \pm 10%	100KHz/0.25V	0.640	0.58
CMLF0705-181KTT	180.0 \pm 10%	100KHz/0.25V	0.710	0.51
CMLF0705-221KTT	220.0 \pm 10%	100KHz/0.25V	0.960	0.49
CMLF0705-331KTT	330.0 \pm 10%	100KHz/0.25V	1.260	0.40
CMLF0705-391KTT	390.0 \pm 10%	100KHz/0.25V	1.770	0.36
CMLF0705-471KTT	470.0 \pm 10%	100KHz/0.25V	1.960	0.34
CMLF0705-561KTT	560.0 \pm 10%	100KHz/0.25V	2.000	0.33
CMLF0705-681KTT	680.0 \pm 10%	100KHz/0.25V	2.200	0.32
CMLF0705-821KTT	820.0 \pm 10%	100KHz/0.25V	2.900	0.25
CMLF0705-102KTT	1000.0 \pm 10%	100KHz/0.25V	3.900	0.20

◆ **Note**

- (1) Maximum allowable DC current is that which causes a 10% inductance reduction from the initial value, or coil temperature to rise by 40°C, whichever is smaller. (Reference ambient temperature 20°C).
- (2) Operating temperature -55°C ~ +125°C.
- (3) All test data is referenced to 25°C ambient.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Cybermax](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)