



◆ Features

1. Magnetic-resin shielded construction reduces buzz noise to ultra-low levels;
2. Metallization on ferrite core results in excellent shock resistance and damage-free durability;
3. Closed magnetic circuit design reduces leakage
4. Small and low profile inductor;
5. Take up less PCB real estate and save more power.



◆ Applications


1. Smart phone;
2. Mobile devices with multifunction such as adding color TV and camera;
3. Flat-screen TVs, blue-ray disc recorders, set top boxes;
4. Notebooks, desktop computers, servers, graphic cards;
5. Portable gaming devices, personal navigation systems, personal multimedia devices;
6. Automotive systems;
7. Telecomm base stations.

◆ Lead Free Part Numbering


CMLW 201610 P 2R2 M S T  
(1) (2) (3) (4) (5) (6) (7)

- (1) Series Type
- (2) Dimension : L×W×H(2.0×1.6×1.0mm)
- (3) Material Code
- (4) Inductance: 2R2=2.2μH ;  
100=10μH; 101=100μH
- (5) Inductance Tolerance: M=±20%, N=±30%
- (6) Company Code
- (7) Packaging : Tape Carrier Package

◆ Dimensions

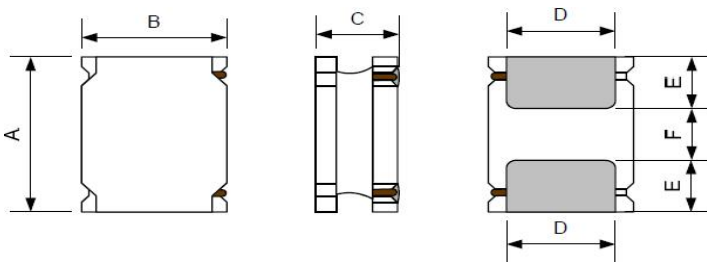

Recommended Land Pattern




Unit:mm

Series	A	B	C	D	E	F	a Typ.	b Typ.	c Typ.
CMLW201610P	2.0±0.2	1.6±0.2	1.0Max.	1.2±0.2	0.60±0.2	0.80±0.2	0.70	0.70	1.7

◆ Electrical Characteristics

- 1) Operating temperature range (Including self-heating) : -40°C ~ +125°C
- 2) Storage temperature range (packaging conditions): -10°C~+40°C and RH 70% (Max.)


◆ Construction and material

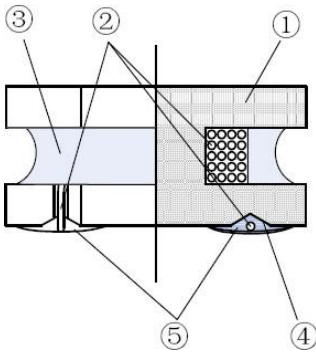


No.	Components	Material
①	Core	Soft magnetic Metal
②	Wire	Polyurethane system enameled copper wire
③	Magnetic Glue	Epoxy resin and magnetic powder
④	substrate	FeNiCu/Ag or Ag/Ni/Sn
⑤	Top Electrodes	Sn alloy
⑥	Marking	Nitrocellulose

◆ REFLOW-PROFILE

Limit Profile

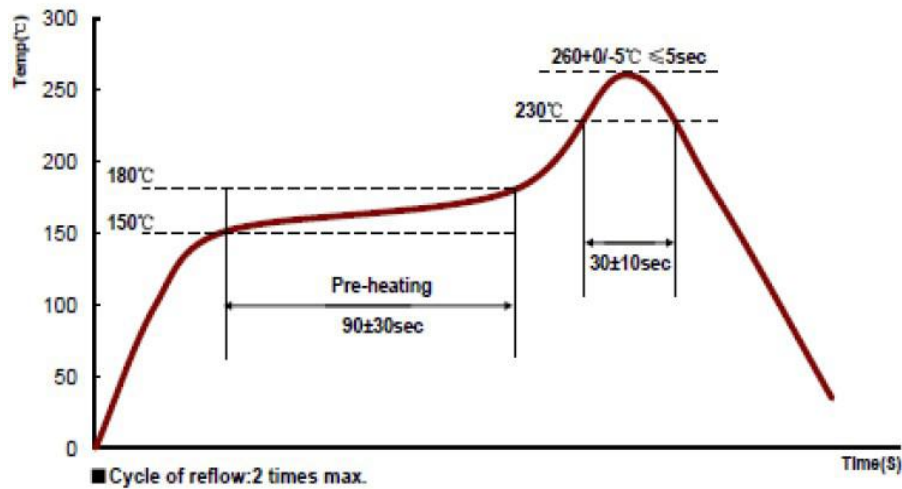

Standard Profile (for EOC Solder paste S70G-HF)

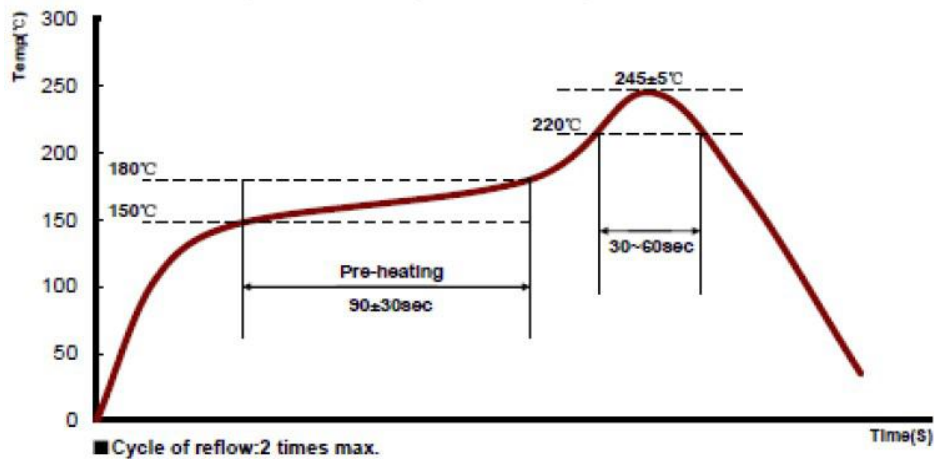

◆ Specification

Part Number	Inductance @100KHz, 1V ( $\mu$ H)	DC Resistance( $m\Omega$ )		Saturation Current Isat		Heat Rating Current Irms	
		DCR		Min. (A)	Typ. (A)	Min. (A)	Typ. (A)
		Typ.	Max.				
<b>CMLW201610P Series</b>							
CMLW201610PR24MST	0.24 $\pm$ 20%	33.0	40.0	4.50	5.50	3.00	3.45
CMLW201610PR47MST	0.47 $\pm$ 20%	41.0	49.0	4.00	4.70	2.70	3.10
CMLW201610PR68MST	0.68 $\pm$ 20%	57.0	65.0	3.50	4.00	2.50	2.80
CMLW201610P1R0MST	1.0 $\pm$ 20%	75.0	90.0	2.60	2.80	2.05	2.35
CMLW201610P1R5MST	1.5 $\pm$ 20%	110	130	1.95	2.30	1.70	2.00
CMLW201610P2R2MST	2.2 $\pm$ 20%	142	170	1.90	2.15	1.45	1.45
CMLW201610P4R7MST	4.7 $\pm$ 20%	370	425	1.20	1.50	0.90	0.90
CMLW201610P6R8MST	6.8 $\pm$ 20%	500	600	1.10	1.40	0.70	0.80
CMLW201610P100MST	10 $\pm$ 20%	688	826	0.80	0.95	0.65	0.65

Note


- 1 : All test data is referenced to 20°C ambient;
- 2 : Rated current: Isat or Irms, whichever is smaller; ( $\Delta$ )
- 3 : Isat: DC current at which the inductance drops approximate 30% from its value without current;
- 4 : Irms: DC current that causes the temperature rise  $T = 40^\circ\text{C}$ ) from 20°C ambient.

◆ Standard Packing Quantity: 2000 pcs/reel


◆ TYPICAL ELECTRICAL CHARACTERISTICS

CMLW201610P Series

Temperature vs. DC Current Characteristics

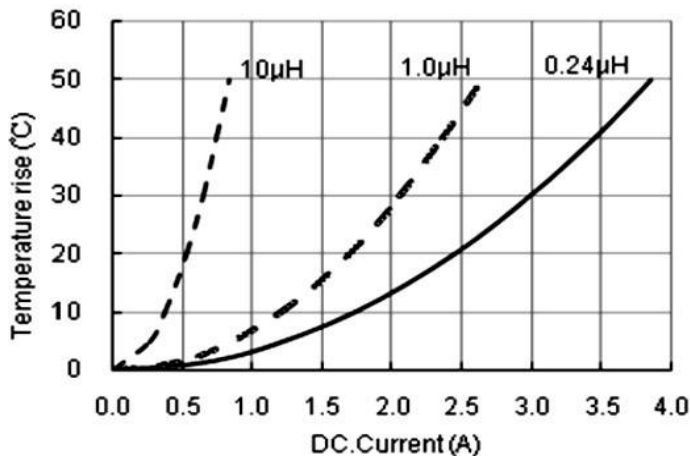

Inductance vs. DC Current Characteristics

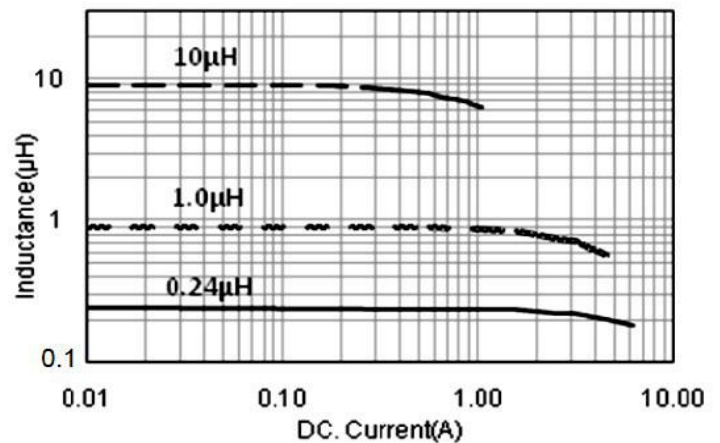

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Cybermax](#) manufacturer:*

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)