



M12 Cable Set Series

Cables for sensors with M12 round connection



- 4 pole M12 connector to IEC61076-2-101
- IP67 protection IEC 60529 (a3)
- Anti-vibration system
- Head temperature range -40 90°C, with good resistance to oils
- Choice of PVC or PUR/PVC cable insulation

Technical Specification

| | |
|----------------------------------|------------------------------|
| Protection degree IEC 60529 (a3) | IP67 |
| Head temperature range °C | -40 to 90 |
| Cable temperature range °C | PVC -25 to 90 PUR -25 to 80 |
| Housing oil resistance | very good |
| Housing material | TPU (polyurethane) |
| Contact material | Gold over nickel plated CuZn |
| Locking nut material | Nickel plated Brass |
| Conductor size | 4/0.34 mm ² |

Electrical Specification

| | | |
|-----------------------|---|------|
| Voltage AC Max | V | 250 |
| Voltage DC Max | V | 250 |
| Current Max @40°C | A | 4 |
| Voltage drop @1A x 1M | V | 0.13 |




The LC cable series can be used with sensors that have M12 round connectors (IEC61076-2-101).

These are supplied as standard with choice of PVC or PUR/PVC sheath insulated cables in lengths of 2, 5 and 10 metres and with either straight or elbow connector bodies.

| Standard Parts | Cable sheath | Wire insulation | Wire cores | Body type | Length (m) |
|----------------|--------------|-----------------|------------|-----------|------------|
| LC02FBS-PVC | PVC | PVC | 4/0.34 | Straight | 2 |
| LC05FBS-PVC | PVC | PVC | 4/0.34 | Straight | 5 |
| LC10FBS-PVC | PVC | PVC | 4/0.34 | Straight | 10 |
| LC02FBS-PUR | PUR | PVC | 4/0.34 | Straight | 2 |
| LC05FBS-PUR | PUR | PVC | 4/0.34 | Straight | 5 |
| LC10FBS-PUR | PUR | PVC | 4/0.34 | Straight | 10 |
| LC02FBR-PVC | PVC | PVC | 4/0.34 | Elbow | 2 |
| LC05FBR-PVC | PVC | PVC | 4/0.34 | Elbow | 5 |
| LC10FBR-PVC | PVC | PVC | 4/0.34 | Elbow | 10 |
| LC02FBR-PUR | PUR | PVC | 4/0.34 | Elbow | 2 |
| LC05FBR-PUR | PUR | PVC | 4/0.34 | Elbow | 5 |
| LC10FBR-PUR | PUR | PVC | 4/0.34 | Elbow | 10 |

Custom versions can be made for particular applications. Please contact Cynergy3 with your requirements.

Mechanical Dimensions

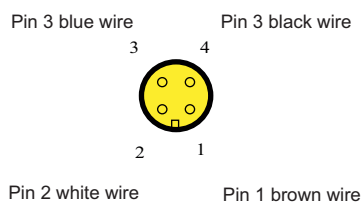

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Gate Drivers](#) category:

Click to view products by [Cynergy3](#) manufacturer:

Other Similar products are found below :

[00028](#) [00053P0231](#) [8967380000](#) [56956](#) [CR7E-30DB-3.96E\(72\)](#) [57.404.7355.5](#) [LT4936](#) [57.904.0755.0](#) [5801-0903](#) [5803-0901](#) [5811-0902](#)
[5813-0901](#) [58410](#) [00576P0030](#) [00581P0070](#) [5882900001](#) [00103P0020](#) [00600P0005](#) [00-9050-LRPP](#) [00-9090-RDPP](#) [5951900000](#) [01-](#)
[1003W-10/32-15](#) [LTI LA6E-1S-WH-RC-FN12VXCR1](#) [0131700000](#) [00-2240](#) [LTP70N06](#) [LVP640](#) [0158-624-00](#) [5J0-1000LG-SIL](#) [020017-13](#)
[LY1D-2-5S-AC120](#) [LY2-0-US-AC120](#) [LY2-US-AC240](#) [LY3-UA-DC24](#) [00-5150](#) [00576P0020](#) [00600P0010](#) [LZNQ2M-US-DC5](#) [LZNQ2-](#)
[US-DC12](#) [LZP40N10](#) [00-8196-RDPP](#) [00-8274-RDPP](#) [00-8275-RDNP](#) [00-8609-RDPP](#) [00-8722-RDPP](#) [00-8728-WHPP](#) [00-8869-RDPP](#) [00-](#)
[9051-RDPP](#) [00-9091-LRPP](#) [00-9291-RDPP](#)