

SPECIFICATIONS

- CONTACT RATING:** Dependent upon contact material
- MECHANICAL LIFE:** 40,000 make-and-break cycles.
- CONTACT RESISTANCE:** 10mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.
- INSULATION RESISTANCE:** 1,000 MΩ min.
- DIELECTRIC STRENGTH:** 1,000 Vrms min. @ sea level.
- OPERATING TEMPERATURE:** -40°C to 85°C.

MATERIALS

- CASE:** Diallyl phthalate (DAP) (UL94v-0).
- ACTUATOR:** Brass, chrome plated.
- BUSHING:** Brass, nickel plated.
- HOUSING:** Stainless steel.
- SWITCH SUPPORT:** Brass, tin plated.
- CONTACT / TERMINALS:** Copper alloy, Silver or gold plated.



1M
Toggle Switches

HOW TO ORDER

MODEL NO.	ACTUATOR	BUSHING	TERMINATIONS	TERMINAL PLATING	SEAL	RoHS SOLDERING
<div style="display: flex; justify-content: space-between;"> <div style="width: 15%;"> <p>Model NO.</p> <p>1MS1 SP On-None-On</p> <p>1MS2 SP On-None-Mom</p> <p>1MS3 SP On-Off-On</p> <p>1MS4 SP Mom-Off-Mom</p> <p>1MS5 SP On-Off-Mom</p> <p>1MD1 DP On-None-On</p> <p>1MD2 DP On-None-Mom</p> <p>1MD3 DP On-Off -On</p> <p>1MD4 DP Mom-Off-Mom</p> <p>1MD5 DP On-Off-Mom</p> <p>1MD6 DP On-On-On</p> <p>1MD7 DP Mom-On-Mom</p> <p>1MD8 DP On-On-Mom</p> <p>1M31 3P On-None-On</p> <p>1M32 3P On-None-Mom</p> <p>1M33 3P On-Off-On</p> <p>1M34 3P Mom-Off-Mom.</p> <p>1M35 3P On-Off-Mom</p> <p>1M41 4P On-None-On</p> <p>1M42 4P On-None-Mom</p> <p>1M43 4P On-Off-On</p> <p>1M44 4P Mom-Off-Mom</p> <p>1M45 4P On-Off-Mom</p> <p>1M46 4P On-On-On</p> <p>1M47 4P Mom-On-Mom</p> <p>1M48 4P On-On-Mom</p> </div> <div style="width: 15%;"> <p>Actuator</p> <p>T1 10.41 high</p> <p>T2 5.08 high</p> <p>T3 13.97 high</p> <p>T4 16.26 high</p> <p>T5 21.34 high</p> <p>T6 Flatted,anti-rotation 12.30 high</p> <p>T61 Flatted,anti-rotation 21.0 high</p> <p>T62 Lever handle with cap 13.49 high</p> <p>T63 Flatted,anti-rotation 6.35 high</p> <p>T7 12.37 high, 15/32 bushing</p> <p>T8 17.56 high, 15/32 bushing</p> <p>T88 17.5 high, 15/32 bushing</p> <p>T9 Plastic, 21.3 high</p> <p>TL1 Locking lever 16.00 high</p> <p>TL2 Locking lever 16.26 high</p> <p>TL3 Locking lever 17.28 high</p> </div> <div style="width: 15%;"> <p>Bushing</p> <p>B1 8.89 high, keyway (thd std)</p> <p>B2 8.89 high, keyway (non-thd)</p> <p>B3 7.10 high, keyway (thd)</p> <p>B4 7.10 high, keyway (non-thd)</p> <p>B5 7.52 high, flat (torque)</p> <p>B6 8.00 high, keyway (torque)</p> <p>B7 8.89 high, flat (thd std)</p> <p>B8 8.89 high, keyway (metric thd)</p> <p>B9 7.52 high, flat (splash proof)</p> <p>B11 7.55 high, keyway (thd std)</p> <p>B12 7.55 high, keyway (non-thd)</p> <p>B13 11.38 high, keyway (15/32 bushing)</p> <p>B14 11.90 high, flat (splash proof)</p> <p>B15 7.55 high, flat (thd std)</p> <p>B16 7.55 high, flat (non-thd)</p> <p>B17 3.50 high, keyway</p> <p>B18 11.38 high, keyway (15/32 bushing)</p> <p>B20 11.38 high, keyway (15/32 bushing)</p> <p>B25 8.00 high, keyway, locking lever (thd)</p> <p>B26 8.00 high, keyway, locking lever (non-thd)</p> <p>B52 11.70 high, flat (15/32 bushing)</p> </div> <div style="width: 15%;"> <p>Terminations</p> <p>M1 Solder lug</p> <p>M2 PC thru-hole</p> <p>M3 Quick connect</p> <p>M51 18.70 high, wire wrap</p> <p>M52 24.20 high, wire wrap</p> <p>M53 10.55 high, wire wrap</p> <p>M54 26.97 high, wire wrap</p> <p>M6 Right angle, PC thru-hole</p> <p>M6N Right angle, Snap-in, PC thru-hole</p> <p>M7 Vertical right angle, PC thru-hole</p> <p>VS2 11.68 high, V-bracket</p> <p>V2N 11.68 high, Snap-in. V-bracket</p> <p>VS3 16.00 high, V-bracket</p> <p>VS4 11.68 high, V-bracket</p> <p>VS5 16.00 high, V-bracket</p> </div> <div style="width: 15%;"> <p>Terminal plating</p> <p>Q Silver</p> <p>R Gold</p> <p>C Gold over silver</p> </div> <div style="width: 15%;"> <p>Seal</p> <p>E EPOXY (std)</p> <p>N NO EPOXY</p> </div> <div style="width: 15%;"> <p>RoHS soldering</p> <p>S RoHS & Lead Free</p> </div> </div>						

1M Series

Miniature Toggle Switches

SWITCH FUNCTION



1M
Toggle Switches

NO. POLES	UL/CSA MODEL NO.	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
			POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
SP	Q1111	1MS1	ON	NONE	ON		N/A	2-1
	Q1112	1MS2	ON	NONE	MOM			
	Q1113	1MS3	ON	OFF	ON			
	Q1114	1MS4	MOM	OFF	MOM			
	Q1115	1MS5	ON	OFF	MOM			
DP	Q1121	1MD1	ON	NONE	ON		N/A	2-1,5-4
	Q1122	1MD2	ON	NONE	MOM			
	Q1123	1MD3	ON	OFF	ON			
	Q1124	1MD4	MOM	OFF	MOM			
	Q1125	1MD5	ON	OFF	MOM			
	Q1126	1MD6	ON	ON	ON			
	▲ Q1127	1MD7	MOM	ON	MOM			
	▲ Q1128	1MD8	ON	ON	MOM			
3P	Q1131	1M31	ON	NONE	ON		N/A	2-1,5-4,8-7
	Q1132	1M32	ON	NONE	MOM			
	Q1133	1M33	ON	OFF	ON			
	Q1134	1M34	MOM	OFF	MOM			
	Q1135	1M35	ON	OFF	MOM			
4P	Q1141	1M41	ON	NONE	ON		N/A	2-1,5-4,8-7,11-10
	Q1142	1M42	ON	NONE	MOM			
	Q1143	1M43	ON	OFF	ON			
	Q1144	1M44	MOM	OFF	MOM			
	Q1145	1M45	ON	OFF	MOM			
	Q1146	1M46	ON	ON	ON			
	▲ Q1147	1M47	MOM	ON	MOM			
	▲ Q1148	1M48	ON	ON	MOM			


MOM= MOMENTARY

▲ Please check the availability in advance before order

POLE OPTIONS




1M
Toggle Switches

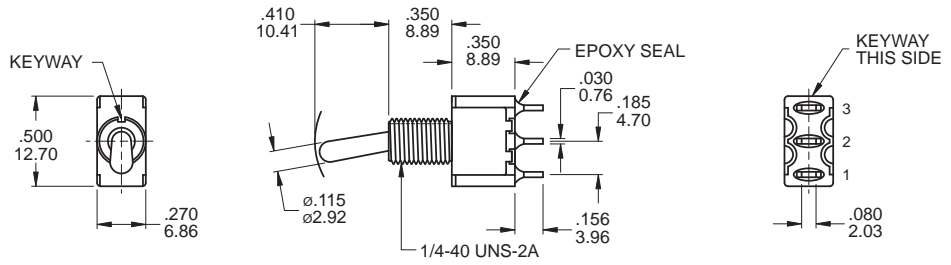


SPDT

Part No. Shown : 1MS1T1B1M1QES

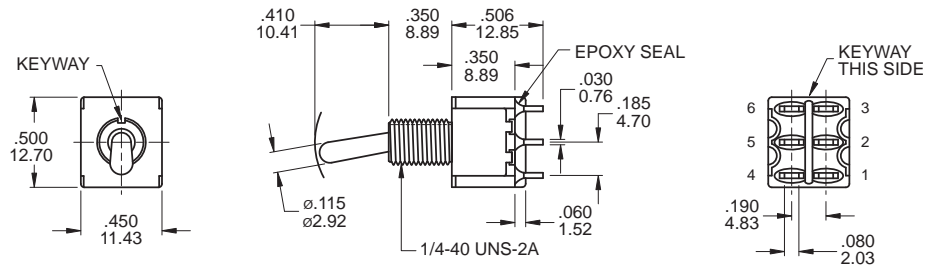


DPDT

Part No. Shown : 1MD1T1B1M1QES

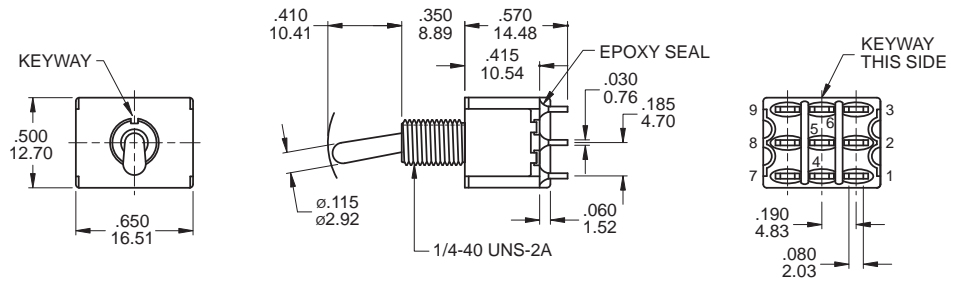

3PDT

Part No. Shown : 1M31T1B1M1QES

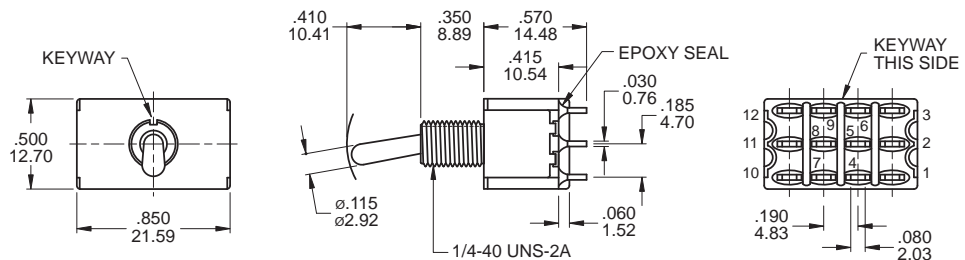

4PDT

Part No. Shown : 1M41T1B1M1QES

1M Series

Miniature Toggle Switches

3-WAY SWITCH




3-Way Wiring Diagram Schematics



1M
Toggle Switches



SINGLE POLE, 3 POSITION

Model No.	POS 1	POS 2	POS 3
1MD6	ON	ON	ON
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4

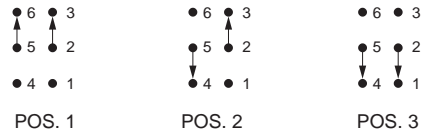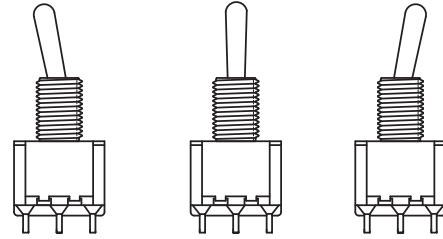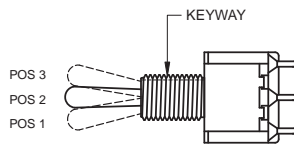


DOUBLE POLE, 3 POSITION

Model No.	POS 1	POS 2	POS 3
1M46	ON	ON	ON
Term. Comm.	2-3,5-6 8-9,11-12	2-3,5-4 8-9,11-10	2-1,5-4 8-7,11-10

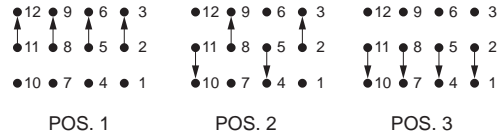


ACTUATOR OPTIONS


T1 STD




T2




T3



T4



T5



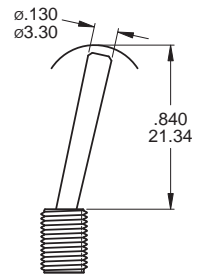


NOTE : T1 ~ T5 Actuator shown with standard B1 Bushing ;
 Add .070 (1.78) for B3 Bushing ;
 Subtract .020 (0.51) for B6 Bushing ;
 Std for M1 , M2 Terminal sub .016 (0.40) for M6 , M7 , VSX (Exclude B1/B2 bushing)

T88B52

SPLASH PROOF


Std SPDT for M1,M2 Terminal

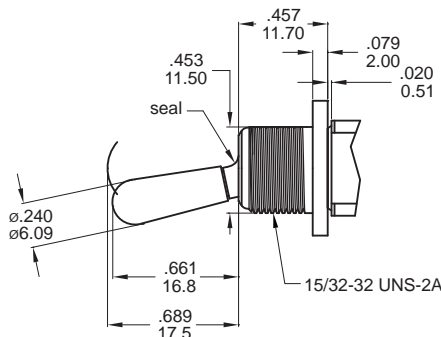


PANEL MOUNTING
Without locking ring (Flat)




T6 FLATTED WITH ANTIROTATION

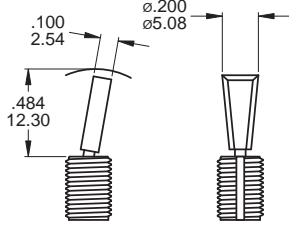


T61



T63



T62




Plastic No.Color :

ITEM NO	COLOR
1	White
2	Black (Std)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray

NOTE: T6,T61,T62 ,T63 use with B11, B12, B15, B16 bushing only.


* Besides standard color, other colors need to check stocks available.

T7

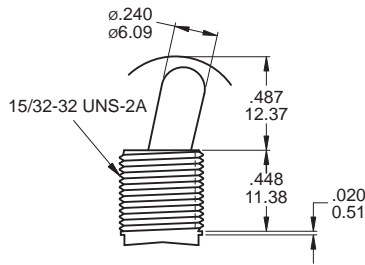


Use with B13 bushing
Use with B18,B20 the lever is antirotation and the size of lever is 13.00mm

T8

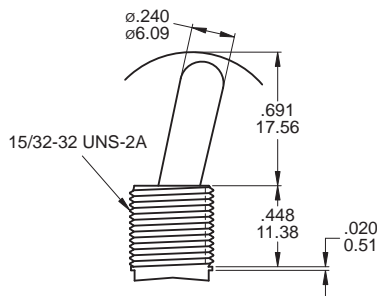


Use with B13 bushing
Use with B18,B20 the lever is antirotation and the size of lever is 18.00mm

T9




B1 / B2 bushing std with black(T92) and red(T93) color only(std.)



TL1B25 THD STD
B26 NON-THD

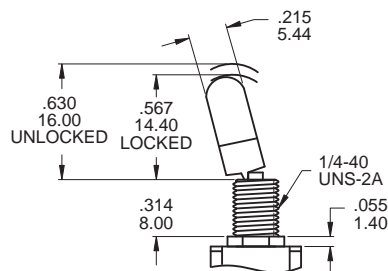

TL2B25 THD STD
B26 NON-THD

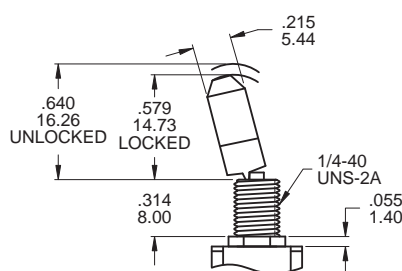

TL3B25 THD STD
B26 NON-THD

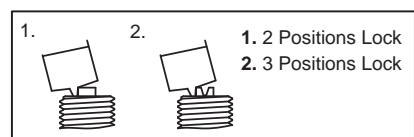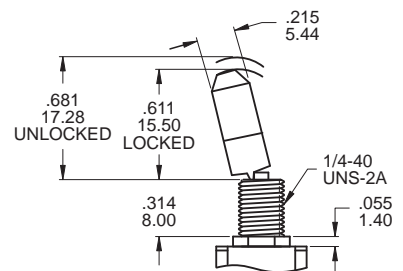

1M Series


Miniature Toggle Switches

BUSHING OPTIONS




1M
Toggle Switches

B1 THD STD
B2 NON-THD

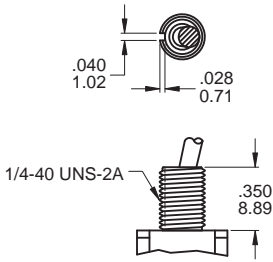


Subtract .016 (0.40) for M6, M7 and VS2-5 termination options.

B3 THD
B4 NON-THD




B4 is standard for M6, M7 and VS2-5 termination options.


B5 HIGH TORQUE

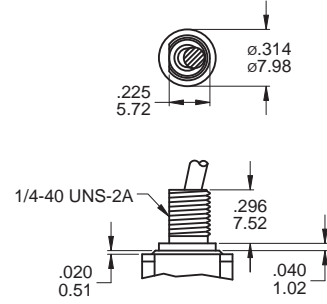


B6 HIGH TORQUE

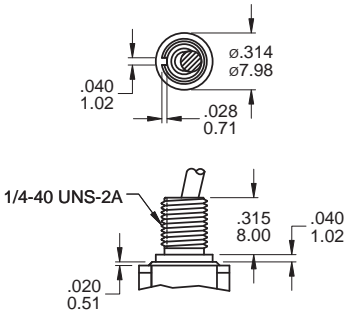



B7 THD STD




B8 METRIC THD

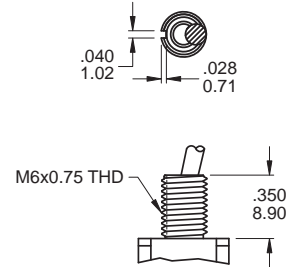


B9 SPLASH PROOF

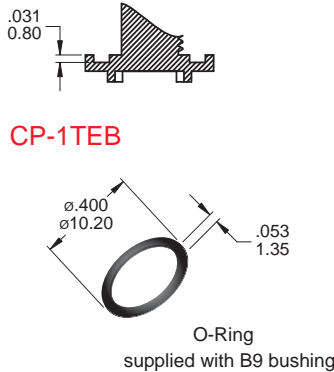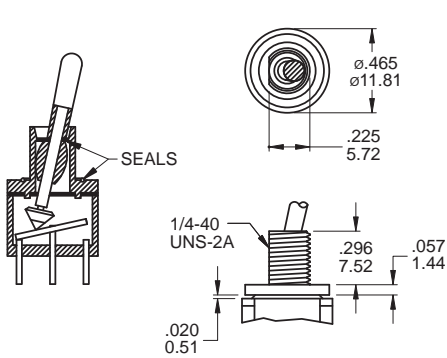


B11 THD STD
B12 NON-THD

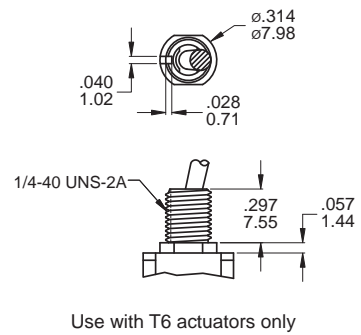


B15 THD STD
B16 NON-THD

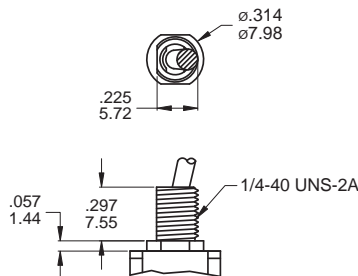


B17

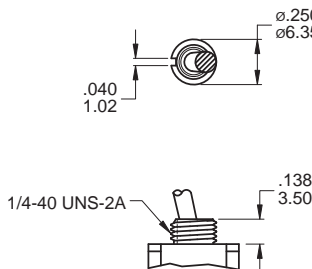

B13

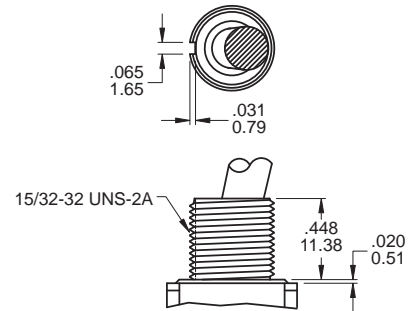


B14 SPLASH PROOF

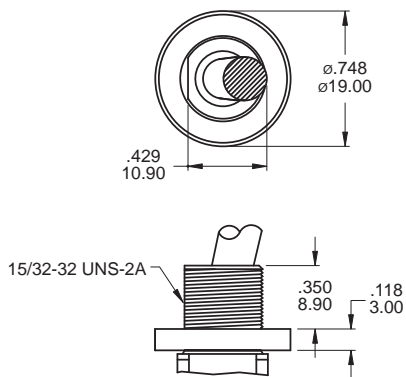


Use with T7, T8 actuators only

B18

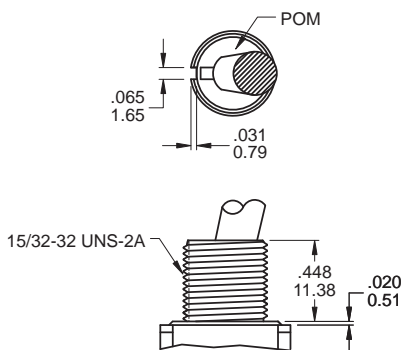

Use with T7, T8 and TA actuators only with Plastic (POM) Insert

B20

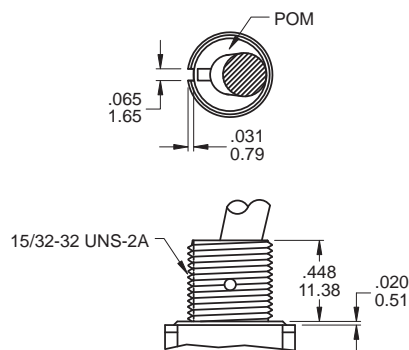

Use with T7, T8 and TA actuators only with Plastic (POM) Insert


B18, B20 Bear strength from top of actuator up to 20kg aside up to 15kg



1M
Toggle Switches

OPTIONAL TOGGLE CAP

CP-T1XX



Use with T1 actuator


CAP Color :

ITEM NO	COLOR
1	White
2	Black (Std)
3	Red
5	Yellow
6	Green
7	Blue
9	Gray


* Besides standard color, other colors need to check stocks available.

PANEL MOUNTING


1/4 IN BUSHING



Without locking ring (Keyway)




Without locking ring (Flat)




With standard locking ring.

METRIC BUSHING




Without locking ring (Keyway)




With standard locking ring.

15/32 IN BUSHING

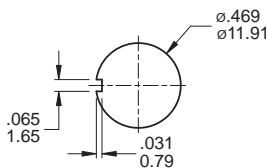


Without locking ring (Keyway)

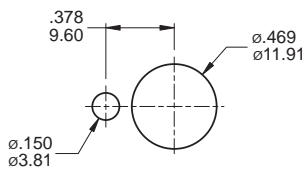

With standard locking ring.

SPLASH PROOF BUSHING




Without locking ring (Flat)

1M Series


Miniature Toggle Switches

TERMINATION OPTIONS


M1 Solder lug




M2 PC Thru-hole

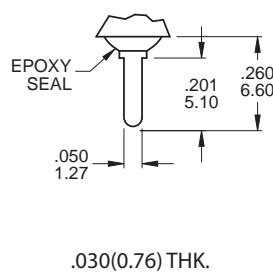

M3 Quick connect

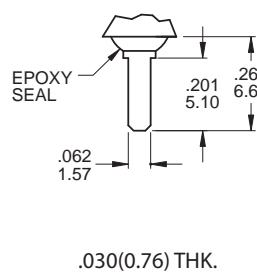

M5 Wire Wrap

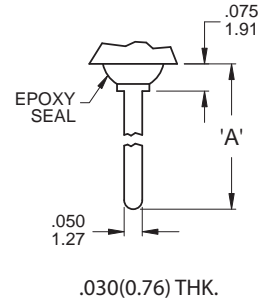

OTHER TERMINATION OPTIONS

M6 Right angle P.C. Mount

M7 Vertical right angle P.C. Mount

VS2 Vertical bracket P.C. Mount

VS3 Vertical bracket P.C. Mount


VS5 Vertical bracket P.C. Mount

M6N Right angle P.C. Mount with snap-in bracket


V2N Vertical bracket P.C. Mount with snap-in bracket

OPTION CODE	DIM. 'A'
M51	.736 (18.70)
M52	.953 (24.20)
M53	.415 (10.55)
M54	1.062 (26.97)

M6

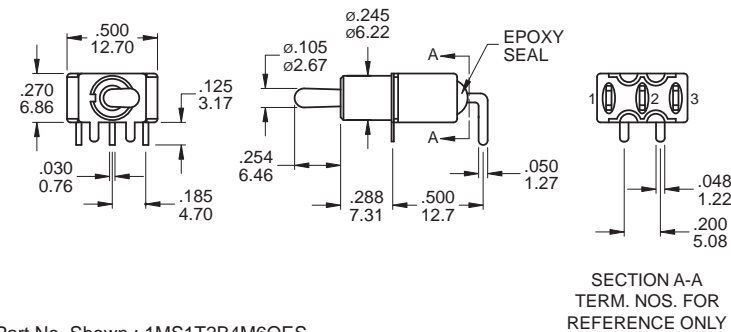


P.C. MOUNTING




SPDT

Part No. Shown : 1MS1T2B4M6QES

M6

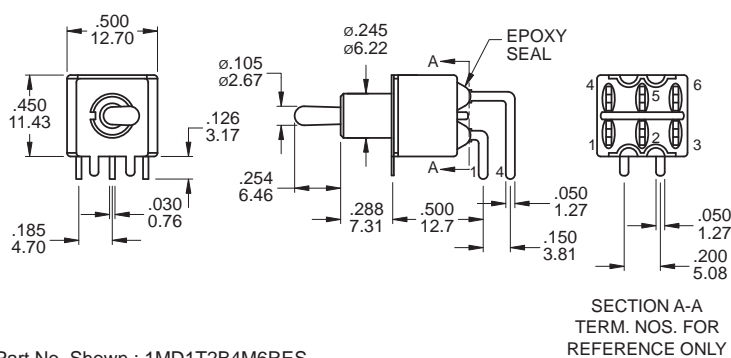


P.C. MOUNTING




DPDT

Part No. Shown : 1MD1T2B4M6RES

M7

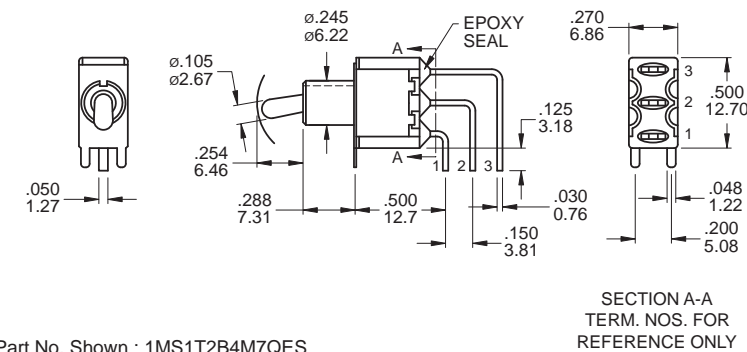

P.C. MOUNTING



SPDT


Part No. Shown : 1MS1T2B4M7QES

1M
Toggle Switches




1M
Toggle Switches

M7

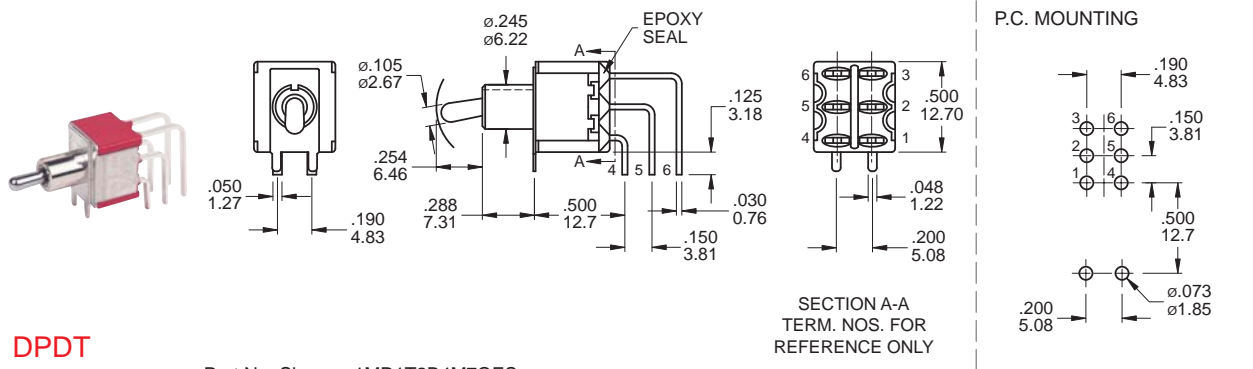


DPDT

M7

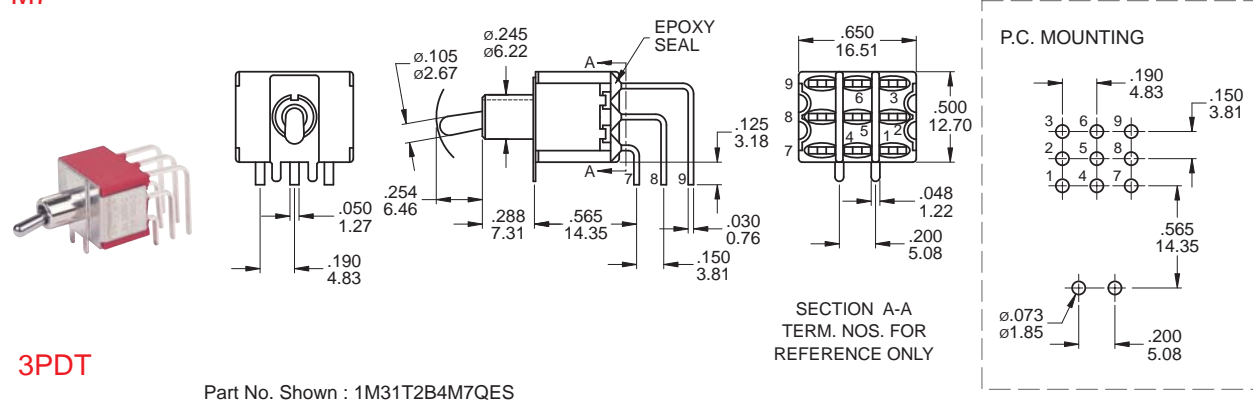


3PDT

M7

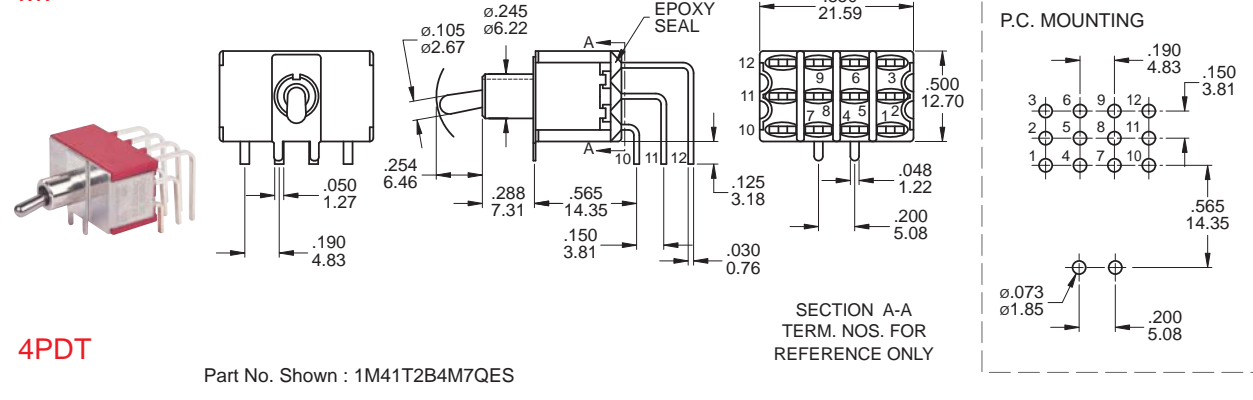

4PDT

VS2 - VS3

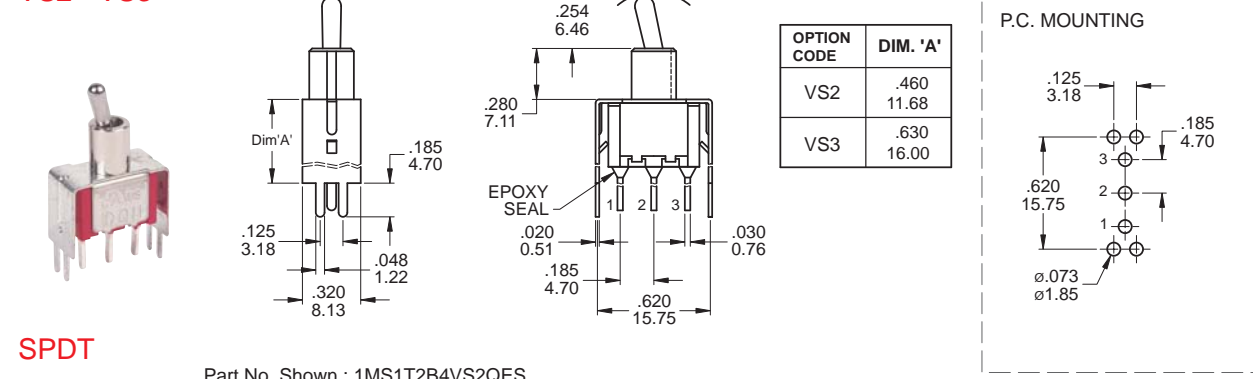

SPDT



1M Series

Miniature Toggle Switches




1M
Toggle Switches

VS2 - VS3

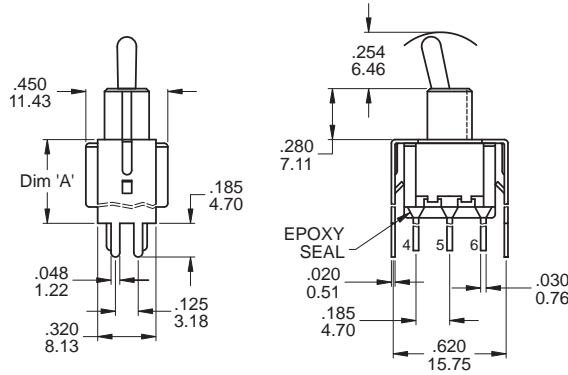

OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00


P.C. MOUNTING



DPDT


Part No. Shown : 1MD1T2B4VS3QES

VS5

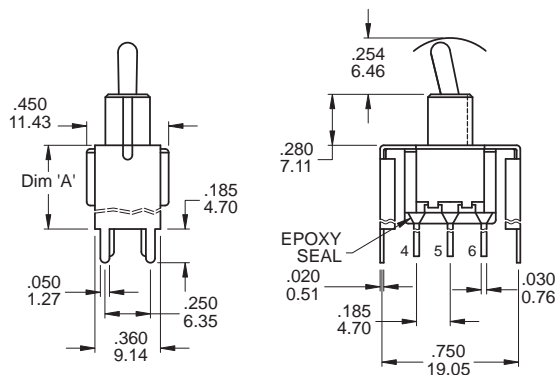

OPTION CODE	DIM. 'A'
VS4	.460 11.68
VS5	.630 16.00

P.C. MOUNTING





DPDT


Part No. Shown : 1MD1T2B4VS5QES

SNAP-IN TERMINATION OPTIONS

M6N




V2N



HARDWARE



1/4 NUT



MNU-1M01A



Supplied standard with
B1, B3, B5, B6 and B9 options

DRESS NUT



MNU-1M29


METRIC NUT



MNU-1M04

Supplied standard with
B8 metric bushing

LOCKWASHER




MNU-1M03

Supplied standard with
B1 / B3 bushing




LOCKING RING



MNU-1M02

Locking ring supplied standard


LOCKING RING



MNU-1M11

Locking ring supplied with B5 bushing


LOCKING RING



MNU-1M08

Locking ring supplied with B13,B18,B20 bushing


LOCKING RING



MNU-1M05

Locking ring supplied with B8 bushing


15/32 NUT

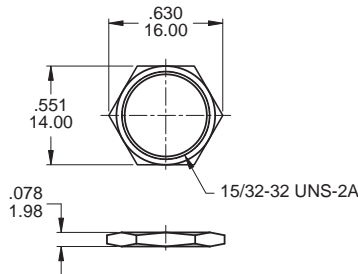

MNU1M07

Supplied standard with B13 bushing


LOCKWASHER



MNU-1M09


Supplied standard with B13 bushing

OPTIONAL RUBBER HOOD SEALING




K1=Metric
E1=Inch (Std.)
for actuator T1, T2 and
B1, B3, B5, B6 Bushing only

DRESS NUT

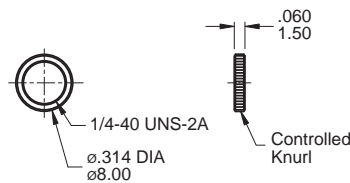

MNU-1M18

DRESS NUT

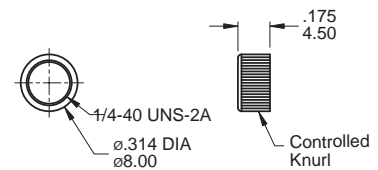

MNU-1M24

CONTACT MATERIAL OPTIONS

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Q = Silver	5 Amps with resistant load @ 120VAC or 28VDC 2 Amps with resistant load @ 250VAC
C	Gold over Silver	C = Gold over silver	
R	Gold	R = Gold	0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC)

SOLDERING PROCESSES

MANUAL SOLDERING: Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.

WAVE SOLDERING: Recommended Soldering Temperature: 270 ± 5°C

Duration of Solder Immersion: Max 5 sec. (PCB is 1.6mm in thickness)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Toggle Switches](#) category:

Click to view products by [Dailywell](#) manufacturer:

Other Similar products are found below :

[8928K478](#) [8951K2998](#) [8951K3310](#) [8956K1283](#) [8956K1286](#) [8956K1287](#) [8961K155](#) [8A1-C-222](#) [020017-13](#) [0090-0001](#) [0121-0015](#) [CS115W](#)
[CS120W](#) [CS215I](#) [CS8275](#) [637H/25](#) [6663](#) [7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#) [71YY50282](#) [7209SY9AQE](#)
[7209SYCBE](#) [7300K36](#) [7301K38](#) [7301SS24484](#) [7303KZQE](#) [7306K36](#) [7310K36](#) [7503K21](#) [7506K4](#) [7565K6](#) [7595K6](#) [7660K12](#) [7691K14](#)
[7700K1](#) [7704K3](#) [8391K108](#) [8396K108](#) [8811K17](#) [8812K14](#) [8824K14](#) [8825K5](#) [8828K13](#) [8835K3](#) [8858K44](#) [8E4011](#) [1202W](#)
[A201SCWZB04](#)