



本公司智慧財產,未經同意不得複製

DAILYWELL copyright, may not be used without permission from DAILYWELL



SWITCH FUNCTION



SPECIFICATIONS

Max. current/voltage rating with resistive load: 400mA 32VAC - 100 mA 50VDC - 125 mA 125VAC. **INITIAL CONTACT RESISTANCE:** 50 m Ω max. **INSULATION RESISTANCE:** 1 G Ω min. at 500VDC.


DIELECTRIC STRENGTH: 1,000 VAC rms.


ELECTRICAL LIFE AT FULL LOAD: 500,000 cycles.

PANEL THICKNESS: 0.8 mm (.031) min. -1.8 mm (.071) max.

TOTAL TRAVEL: 1.5 mm(.059). **OPERATING FORCE: 2N~5N. CONTACT BOUNCE:** 10 ms.

MECHANICAL LIFE: 1,000,000 cycles. **SOLDERING:** 350°C max. for 5 seconds.



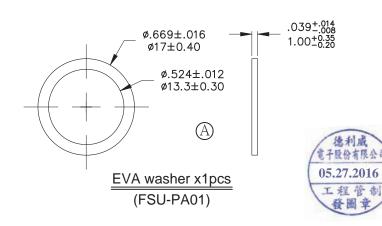

MATERIALS

CASE: Diallyl phthalate (DAP)(UL94v-0).

CAP: Polyamide 6/6. BUSHING: Polyamide 6/6.

TERMINAL/CONTACTS: Gold over silver plated.

RoHS & Lead Free

德利威電子股份有限公司

							DAILTWELL LLLCIROINICS CO.,LID.						
	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例): 3:2	TITLE	Sub - Miniature Pushb			utton Switches	SIZE 圖紙	A4	
1	A	依據N1607修訂FSU-PA01尺寸公差		MAY-27-2016	(, = , 1)	圖名 DWG NO.						inch	
2	igotimes				TOLERANCE (公差): 0.00 mm ± 0.25mm	圖號	PAS6B1M1C			ES3-5		mm	
3					0.0 mm ± 0.40mm	REV.	В	DATE 日 期	DEC -	10 - 2014	SHEET	1 of 1	
4	\bigcirc				ANGULAR : ± 5°	版本 CHECKED BY		11 /01		DRAWN BY	張數		
5	Œ)				FILE NAME: PASP0414	審核		陳燈財	,	製圖	IRENI	E	

DAILYWELL

德利威電子股份有限公司

版本: C

表單編號: QR-0507

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by Dailywell manufacturer:

Other Similar products are found below:

LW1L-M1C10V-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M7E-HRN2 67021K512 67081K512X 701PB580 719-5504-000

MDPSSGLFS 810KSV30B MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8646AB6X718UL 8646ABUL

FSDWH 9001KXRK 9001T8BK 9533CD4+U574+U4922 1203MRA A22EM01S A595 1202A6 12037A2ULCSA 1203A2UL ABD122N
B 1211390004 ABN111-Y ABN400-R 1211500044 1211580012 1212MRA 1232A6NF RA3CSH6A 1241.1183.7047 1241.2511

1241.3428 1223A2ULCSA 1223MRA 1232AX2119 1241.1183.8000 1241.1183.8029 1241.2506 1241.2606 12MA6 1301940184

RELBARF6X10(PLASTIC) 13435AG