本公司智慧財產,未經同意不得複製 DAILYWELL copyright, may not be used without permission from DAILYWELL

45.

SWITCH

POSITION


C-1

C-2

C-3

C-4

C-5

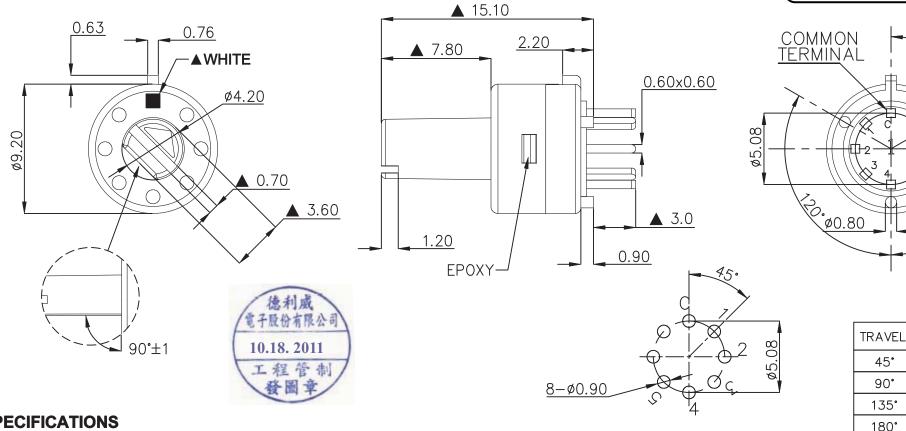

## **SPECIFICATIONS**

ELECTRICAL RATING: 0.5A 24VDC; 0.2A 48VDC

CONTACT RESISTANCE:100 mΩ MAX.

INSULATION RESISTANCECE:100 MΩ MIN. 500VDC

**DIELECTRIC STRENGHT: 500VAC for 1 minute** 

OPERATING FORCE: 350±150g **OPERATING LIFE: 2,000 cycles** 

OPERATING TEMPERATURE RANGE: -20°C ~ 70°C

**MATERIAL** 

**HOUSING: NYLON 6/6** 

BASE:LCP

**ACTUATOR: NYLON 6/6** TERMINAL: Brass gold plating.

RoHS: 2002/95/EC

德利	威	電子	股	份有	限	公	司
DAILY	WEL	L EL	ECT	RONIC	s cc	)LT	'D

225°

- 1									111011100		
		符號	原尺寸	修改後尺寸	變更日期	SCALE (比例): 4:1	TITLE	ROTAR	Y SWITCH	SIZE 国紙 A4	Δ4
	1	A				,	圖名 DWG NO.		圖紙		
Ì	2	B				TOLERANCE (公差): - 0.00 mm ± 0.25mm	圖號	RT-005		UNIT 單位	mm
	3	C				0.00 mm ± 0.40mm	REV. 版本	A DATE C	OCT - 18 - 2011	SHEET 張數	1 of 1
	4	D				ANGULAR: ± 5°	版 本 CHECKED BY	A  日期   C	DRAWN BY	灰数	
	5	(E)				FILE NAME: RT0032	審核	RICHARI	製圖	IREN	-

**DAILYWELL** 

德利威電子股份有限公司

版本: C

P.C.B. LAYOUT

表單編號: QR-0507

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rotary Switches category:

Click to view products by Dailywell manufacturer:

Other Similar products are found below:

57HS22-02-2-06N 57M22-02B16N 57M22-09A16N 58J1007 58J8A45-01B05N 59M18-02A20N M3786/39-3BA M3786/39-LMC M3786/4-0007 M3786/4-0073 M3786/4-0182 M3786/4-0640 M3786/4-0873 M3786/4-0881 M3786/4-3187 M3786/4-3267 M3786/4-5272 M3786/4-5568 M3786/4-5876 M3786/4-6029 71ESF30-05204N MC06L1NCGF FA201BKGN 84986-26 9003K2C003GA PLR3251 PLR3262 PLR3279 PS3 A019305 A019306 A019501 A029301 A165W-T2AR R2AA2133NNNN R2AA4455NNNN R2BB4455NNNN ACSNO-6123-FB-C6002 RMS1224 DR75-AMSF-10R-B 14-520.0360 BCK1006 1703.3201 HW1MS-0202-101 C6P0206N-A 24002-03S A019109 A029101 A165W-T3MR A22NS-3BM-NRA-G120-NN