
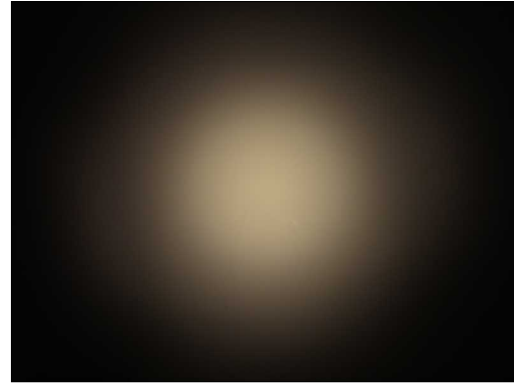


FEATURES AND PATTERN

www.dbmlighting.com


Medium Beam for Cree MT-G

Lens Reference	CR-001
Tested with LED	CREE MT-G 36V & 6V
Lens Material	PMMA
Operating temperature	-40°C+90°C





OPTICAL EFFICIENCY

FWHM:	27.0 deg
Collection Efficiency:	89 %
Cd/Lm:	3.20

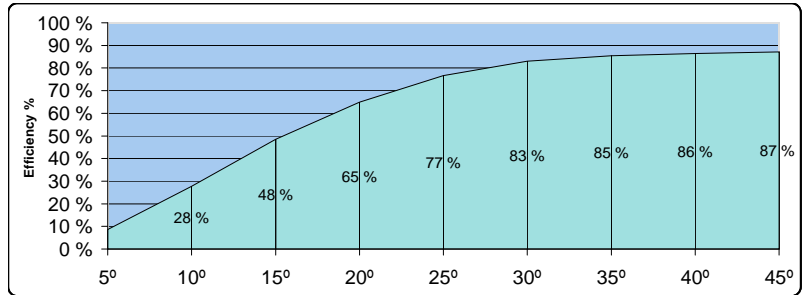


OUTPUT DISTRIBUTION

LED Flux: 670 lumens at 7W for 36V version and 8W for the 6V version

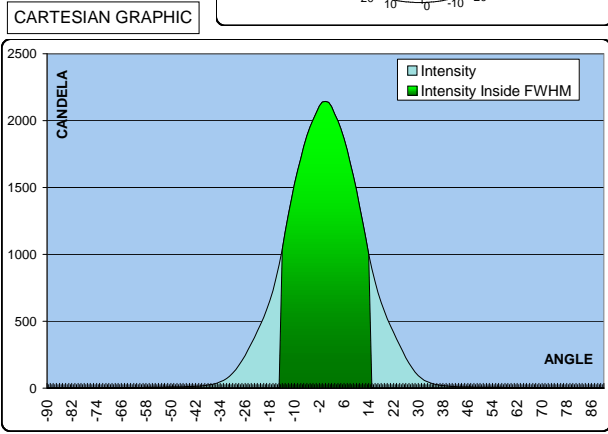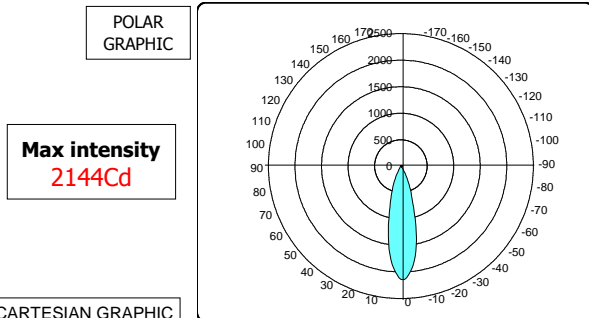

ILLUMINANCE

ILLUMINANCE VALUES AT VARIOUS DISTANCES			
RANGE	1.0 m	2.0 m	3.0 m
ILLUMINANCE	2144 Lux	536 Lux	238 Lux
MULTIPLICATOR RATE LED+LENS / LED ONLY	10 X		

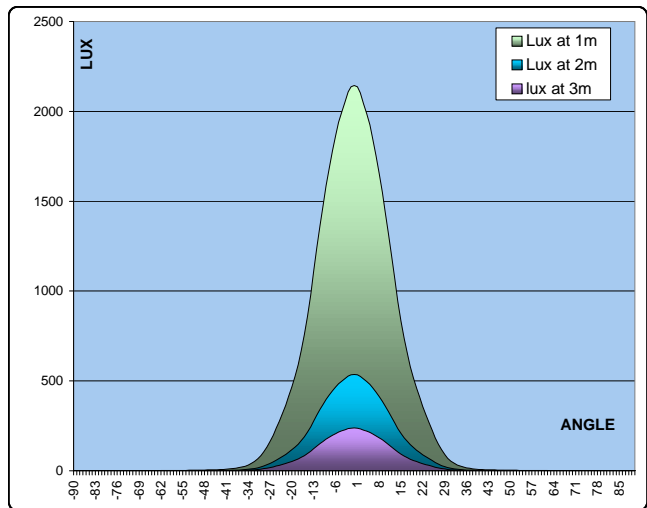

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Lenses](#) category:

Click to view products by [DBM Optix](#) manufacturer:

Other Similar products are found below :

[LL01ED-AK40L06](#) [LL01ZZ-EX25L06-M2](#) [180182-0000](#) [LL01ED-ALI55R49](#) [C14707_IDA16-O](#) [C12231_LENA-FRESNEL-LENS](#)
[LL01ED-AKY24R49](#) [LL01CR-AYG15R49](#) [LL01CR-OT32L06-M2](#) [LL01ZZ-AAA24L49](#) [LL01CR-CEN38L02](#) [LL01ZZ-AAA55L49](#)
[LL01CR-AYG24R49](#) [LL01A00CZMB2-M2](#) [LL01ED-AKY38R49](#) [LL01CR-CNE2545L06-M2](#) [LL01ZZ-AAA38L49](#) [LL01ED-AKV36R49](#)
[LL01ED-ALI24R49](#) [LL01CR-AYG38R49](#) [C17171_DAISSY-8X1-SHD-MATT](#) [F16859_LINDA-ZT25](#) [C17295_ILONA-ZOOM](#)
[F16636_LINDA-W60](#) [C17362_DAISSY-7X1-W-D](#) [C16871_DAISSY-7X1-W](#) [10003](#) [10003/15](#) [10048](#) [10049](#) [10108](#) [10510](#)
[F14487_FLORENCE-1R-MAXI-WG](#) [12667](#) [C14165_STRADA-2X2-ME-WIDE2](#) [C14605_HB-2X2-RW](#) [C14642_FLORENCE-1R-UP](#)
[FCX11157_RES-O-90](#) [FC2231-0000-0050-L](#) [FC2231-0000-0100-L](#) [C14116_STRADA-2X2-PX](#) [95-0931](#) [C15800_MOLLY-S](#)
[C15802_MOLLY-W](#) [F15523_LINNEA-90](#) [C16503_STRADELLA-16-T3](#) [C15430_STRADELLA-16-HB-S](#) [C15432_STRADELLA-16-HB-W](#)
[F15861_LINNEA-ZT25](#) [C13235_SATU-W](#)