



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

SK32
THRU
SK310

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT SCHOTTKY BARRIER

VOLTAGE RANGE - 20 to 100 Volts

CURRENT - 3.0 Amperes

FEATURES


- * Ideal for surface mounted applications
- * Low leakage current
- * Glass passivated junction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated solderable per MIL-STD-750, Method 2026
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 0.24 gram



SMC (DO-214AB)

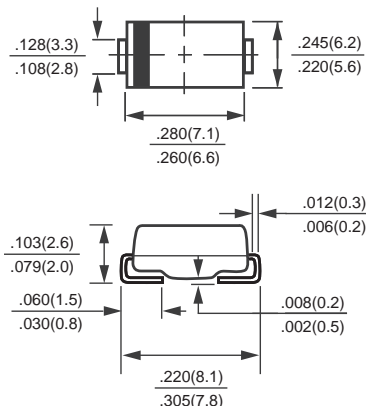

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

	SYMBOL	SK32	SK33	SK34	SK35	SK36	SK38	SK310	UNITS	
Maximum Recurrent Peak Reverse Voltage	VRRM	20	30	40	50	60	80	100	Volts	
Maximum RMS Voltage	VRRMS	14	21	28	35	42	56	70	Volts	
Maximum DC Blocking Voltage	VDC	20	30	40	50	60	80	100	Volts	
Maximum Average Forward Rectified Current at Derating Lead Temperature	IO	3.0							Amps	
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	100							Amps	
Maximum Instantaneous Forward Voltage at 3.0A DC	VF	0.55		0.70		0.85		Volts		
Maximum DC Reverse Current at Rated DC Blocking Voltage	IR	@ TA = 25°C	2.0							mAmps
		@ TA = 100°C	20							
Typical Thermal Resistance (Note 1)	RθJA	55							°C/W	
Typical Junction Capacitance (Note 2)	CJ	200							pF	
Operating Temperature Range	TJ	-55 to + 125							°C	
Storage Temperature Range	TSTG	-55 to + 150							°C	

NOTES : 1. Thermal Resistance (Junction to Ambient).
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
 3. P.C.B Mounted with 0.4X0.4in²(10.0X10.0mm²) copper pad area.

RATING AND CHARACTERISTIC CURVES (SK32 THRU SK310)

FIG.1 - TYPICAL FORWARD CURRENT DERATING CURVE

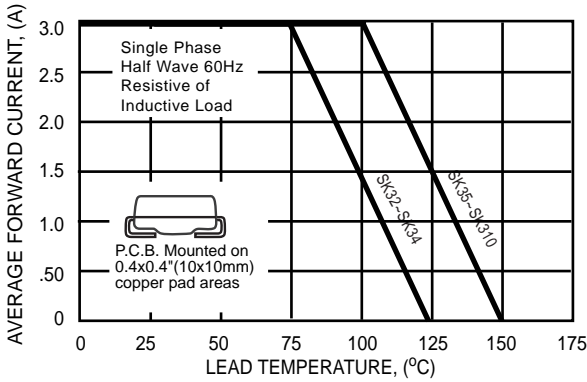


FIG.2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

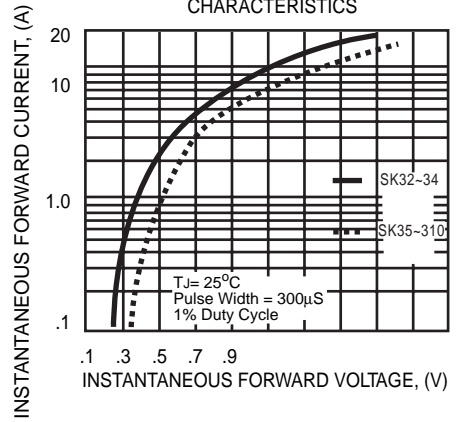


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

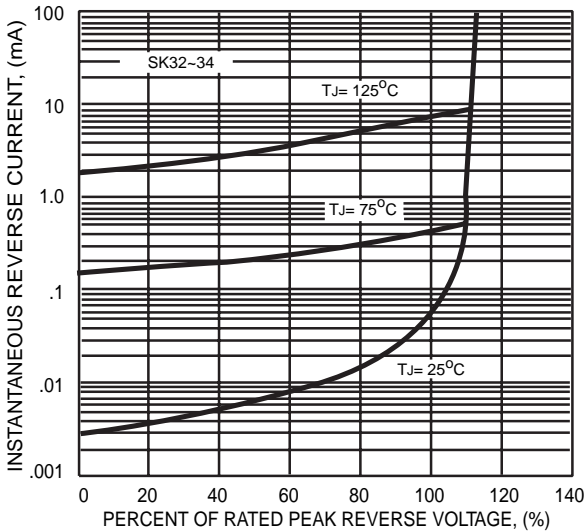


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

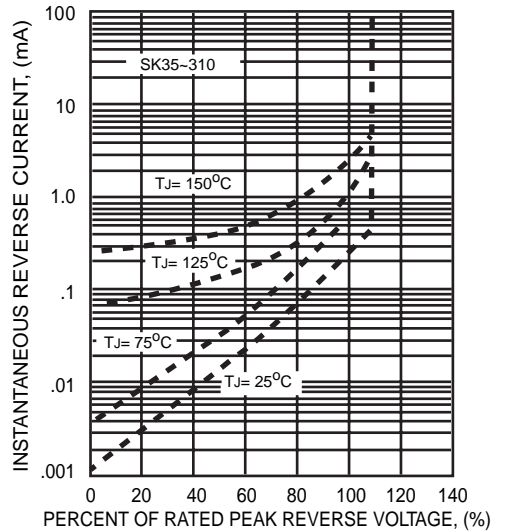


FIG.5 - TYPICAL JUNCTION CAPACITANCE


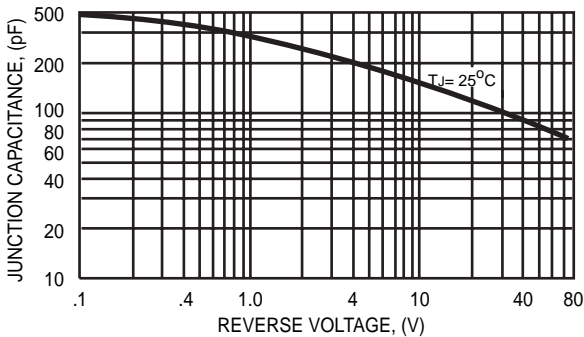


FIG.6 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

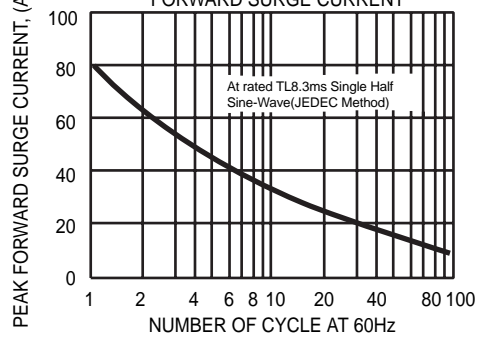

DC COMPONENTS CO., LTD.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [DC Components](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MMBD301M3T5G](#) [HFA35HB60C](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH](#) [E6327](#) [BAT 54-02LRH](#)
[E6327](#) [NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)
[MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R](#) [E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [NRVBB20100CTT4G](#)
[NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#)
[CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [VSSB410S-M3/5BT](#) [1N5819T-G](#)
[PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [BAS 70-07](#) [E6433](#) [B140S1F-7](#) [HSM560Je3/TR13](#) [DDB2265-000](#) [ZHCS506QTA](#)
[HSM190Je3/TR13](#) [B330AF-13](#) [ACDBUC0230-HF](#) [SDM1U100S1F-7](#) [MBR10200CTF-G1](#) [CDLL5712](#)