



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

SMB2EZ6.2
THRU
SMB2EZ330

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT SILICON ZENER DIODES
VOLTAGE RANGE - 6.2 to 330 Volts
POWER - 2.0 Watts

FEATURES

- * Voltage Range:6.2V to 330V
- * Build-in strain relief
- * Glass passivated junction
- * Low inductance
- * Excellent clamping capability
- * Low profile package

MECHANICAL DATA



- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



SMB(DO-214AA)

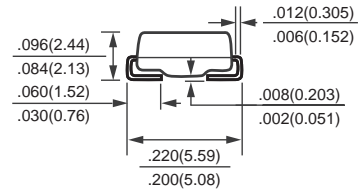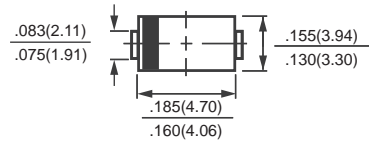

Dimensions in inches(millimeters)

	SYMBOL	VALUE	UNITS
Zener Current see Table "Characteristics"			
Power Dissipation (Notes 1) at Tamb=25°C	Ptot	2	W
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) (Notes 2)	IFSM	15	Amps
Maximum Forward Voltage at IF=500mA	VF	1.2	Volts
Operating and Storage Temperature	TJ,Tstg	-55 to + 150	°C

Notes: 1. Mounted on 5.0mm² (.013mm thick) land areas.

2. Measured on 8.3ms, single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

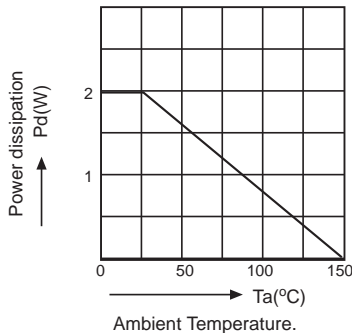


Fig. 1 - changes in the power dissipation due to the ambient temperature.

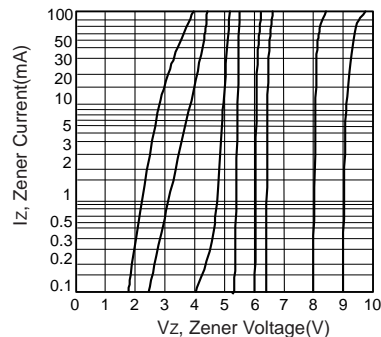


Fig. 2 - Vz=3.9 Thru 10 Volts

RATING AND CHARACTERISTIC CURVES (SMB2EZ6.2 THRU SMB2EZ330)

TYPE	Nominal Zener Voltage $V_Z @ I_Z T$	Zener Test Current $I_Z T$ mA	Maximum Zener Impedance		I_{ZK} mA	Maximum Reverse Leakage Current		Maximum Regulator Current I_{ZM} mA
			$Z_{ZT} @ I_Z T$ Ohms	$Z_{ZK} @ I_{ZK}$ Ohms		I_R uA	@ V_R Volts	
SMB2EZ6.2	6.2	80.5	1.5	700	1.00	50.0	3.0	292.0
SMB2EZ6.8	6.8	73.5	2.0	700	1.00	50.0	4.0	266.0
SMB2EZ7.5	7.5	66.5	2.0	700	0.50	50.0	5.0	242.0
SMB2EZ8.2	8.2	61.0	2.3	700	0.50	50.0	6.0	220.0
SMB2EZ9.1	9.1	55.0	2.5	700	0.50	50.0	7.0	200.0
SMB2EZ10	10	50.0	3.5	700	0.25	50.0	7.6	182.0
SMB2EZ11	11	45.5	4.0	700	0.25	50.0	8.4	166.0
SMB2EZ12	12	41.5	4.5	700	0.25	1.0	9.1	152.0
SMB2EZ13	13	38.5	5.0	700	0.25	0.5	9.9	138.0
SMB2EZ15	15	33.4	7.0	700	0.25	0.5	11.4	122.0
SMB2EZ16	16	31.2	8.0	700	0.25	0.5	12.2	114.0
SMB2EZ18	18	27.8	10	750	0.25	0.5	13.7	100.0
SMB2EZ20	20	25.0	11	750	0.25	0.5	15.2	90.0
SMB2EZ22	22	22.8	12	750	0.25	0.5	16.7	82.0
SMB2EZ24	24	20.8	13	750	0.25	0.5	18.2	76.0
SMB2EZ27	27	18.5	18	750	0.25	0.5	20.6	68.0
SMB2EZ30	30	16.6	20	1000	0.25	0.5	22.5	60.0
SMB2EZ33	33	15.1	23	1000	0.25	0.5	25.1	55.0
SMB2EZ36	36	13.9	25	1000	0.25	0.5	27.4	50.0
SMB2EZ39	39	12.8	30	1000	0.25	0.5	29.7	47.0
SMB2EZ43	43	11.6	35	1500	0.25	0.5	32.7	43.0
SMB2EZ47	47	10.6	40	1500	0.25	0.5	35.8	39.0
SMB2EZ51	51	9.8	48	1500	0.25	0.5	38.8	36.0
SMB2EZ56	56	9.0	55	2000	0.25	0.5	42.6	32.0
SMB2EZ62	62	8.1	60	2000	0.25	0.5	47.1	29.0
SMB2EZ68	68	7.4	75	2000	0.25	0.5	51.7	27.0
SMB2EZ75	75	6.7	90	2000	0.25	0.5	56.0	24.0
SMB2EZ82	82	6.1	100	3000	0.25	0.5	62.2	22.0
SMB2EZ91	91	5.5	125	3000	0.25	0.5	69.2	20.0
SMB2EZ100	100	5.0	175	3000	0.25	0.5	76.0	18.0
SMB2EZ110	110	4.5	250	4000	0.25	0.5	83.6	17.0
SMB2EZ120	120	4.2	325	4500	0.25	0.5	91.2	15.0
SMB2EZ130	130	3.8	400	5000	0.25	0.5	98.8	14.0
SMB2EZ140	140	3.6	500	5500	0.25	0.5	106.4	13.0
SMB2EZ150	150	3.3	575	6000	0.25	0.5	114.0	12.0
SMB2EZ160	160	3.1	650	6500	0.25	0.5	121.6	11.0
SMB2EZ170	170	2.9	675	7000	0.25	0.5	130.4	11.0
SMB2EZ180	180	2.8	725	7000	0.25	0.5	136.8	10.0
SMB2EZ190	190	2.6	825	8000	0.25	0.5	144.8	10.0
SMB2EZ200	200	2.5	1900	9990	0.25	0.5	152.0	9.0
SMB2EZ220	220	2.0	2000	8500	0.25	0.5	167.0	8.0
SMB2EZ270	270	1.6	2200	8500	0.25	0.5	205.0	6.7
SMB2EZ300	300	1.5	2200	9000	0.25	0.5	228.0	5.9
SMB2EZ330	330	1.4	2300	9000	0.25	0.5	250.0	5.4

NOTE: Standard Zener Voltage Tolerance $\pm 5\%$




Fig. 3 - $V_Z=12$ Thru 82 Volts




Fig. 4 - $V_Z=100$ Thru 200 Volts

Disclaimer

Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold *DC COMPONENTS* harmless against all damages.

DC COMPONENTS disclaims any and all liability arising out of the application or use of any product, including consequential or incidental damages. Statement regarding the suitability of products for certain types of applications are based on *DC COMPONENTS*'s knowledge of typical requirements that are often placed on *DC COMPONENTS* products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

DC COMPONENTS reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein, and disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Parameters provided in datasheets and specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify *DC COMPONENTS*'s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise in writing, *DC COMPONENTS* products are intended for use as general electronic components in standard applications (eg: Consumer electronic, Computer equipment, Office equipment, etc.), and not recommended for use in a high specific application where a failure or malfunction of the device could result in human injury or death (eg: Aerospace equipment, Submarine cables, Combustion equipment, Safety devices, Life support systems, etc.)

Customers using or selling *DC COMPONENTS* products not expressly indicated for use in such applications do so at their own risk. If customer intended to use *DC COMPONENTS* standard quality grade devices for applications not envisioned by *DC COMPONENTS*, please contact our sales representatives in advance.



DC COMPONENTS CO., LTD.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [DC Components](#) manufacturer:

Other Similar products are found below :

[DL5234B](#) [1N4682](#) [1N4691](#) [1N4693](#) [1N4732A](#) [1N4733A-TR](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#) [1N5369B](#) [1N747A](#)
[1N959B](#) [1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [NTE5121A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5164A](#) [JANS1N4974US](#) [1N4692](#)
[1N4700](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4737A](#) [1N4745ARL](#) [1N4752A](#) [1N4752ARL](#) [1N4760ARL](#) [1N5221B](#) [1N5236B](#) [1N5241BTR](#)
[1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#) [3SMAJ5950B-TP](#) [3SMAJ5953B-TP](#) [3SMBJ5925B-TP](#)
[TDZTR24](#) [441774C](#) [MMSZ5232BQ-13-F](#)