

| REV | LOCAS | DESCRIPTION | DRAW | DATE |
|-----|-------|-------------|------|------------|
| A0 | NEW | PERLIMINARY | Long | 2018.01.08 |
| A1 | | UPDATED | LIU | 2019.03.26 |
| A2 | | UPDATED | LIU | 2019.05.14 |
| A3 | △3 | UPDATED | LIU | 2021.03.25 |
| A4 | | 修改产品外观 | LIU | 2022.06.02 |

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin-plated
Solder Tabs: Bass/Tin-plated
Material: Nylon 6T UL94V-0
Color: Natural(Beige)

| Circuits | Dimensions mm | | |
|----------|---------------|-------|-------|
| | A | B | C |
| 02 | 1.00 | 4.50 | 2.50 |
| 03 | 2.00 | 5.50 | 3.50 |
| 04 | 3.00 | 6.50 | 4.50 |
| 05 | 4.00 | 7.50 | 5.50 |
| 06 | 5.00 | 8.50 | 6.50 |
| 07 | 6.00 | 9.50 | 7.50 |
| 08 | 7.00 | 10.50 | 8.50 |
| 09 | 8.00 | 11.50 | 9.50 |
| 10 | 9.00 | 12.50 | 10.50 |
| 11 | 10.00 | 13.50 | 11.50 |
| 12 | 11.00 | 14.50 | 12.50 |
| 13 | 12.00 | 15.50 | 13.50 |
| 14 | 13.00 | 16.50 | 14.50 |
| 15 | 14.00 | 17.50 | 15.50 |
| 16 | 15.00 | 18.50 | 16.50 |
| 17 | 16.00 | 19.50 | 17.50 |
| 18 | 17.00 | 20.50 | 18.50 |
| 19 | 18.00 | 21.50 | 19.50 |
| 20 | 19.00 | 22.50 | 20.50 |


| 产品描述 | 产品料号 |
|-------------------------------------|--------------------|
| Pitch:1.0mm, Wafer H:4.40mm单排, 立式贴片 | PAXX12100440-72SMS |
| Pitch:1.0mm, Wafer H:4.35mm单排, 卧式贴片 | PAXX07100435-62SMS |

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGULAR ±1'

DongGuan D-CHAIN Precision Components CO, Ltd
D-CHAIN

| | | | | | | |
|-----------------------------|-----|------|------------|------------------------------------|------------|----------|
| DRAWN | LIU | DATE | 2019.03.26 | TITLE: | | |
| CHECKED | | DATE | | Pitch:1.0mm Wafer H:4.40mm单排, 立式贴片 | | |
| APPROVED | | DATE | | | | |
| PART No. PAXX12100440-72SMS | | | | REV: A4 | SCALE: 1:1 | UNIT: mm |
| DRAWING No. | | | | SIZE: A4 | SHEET: 1/1 | |

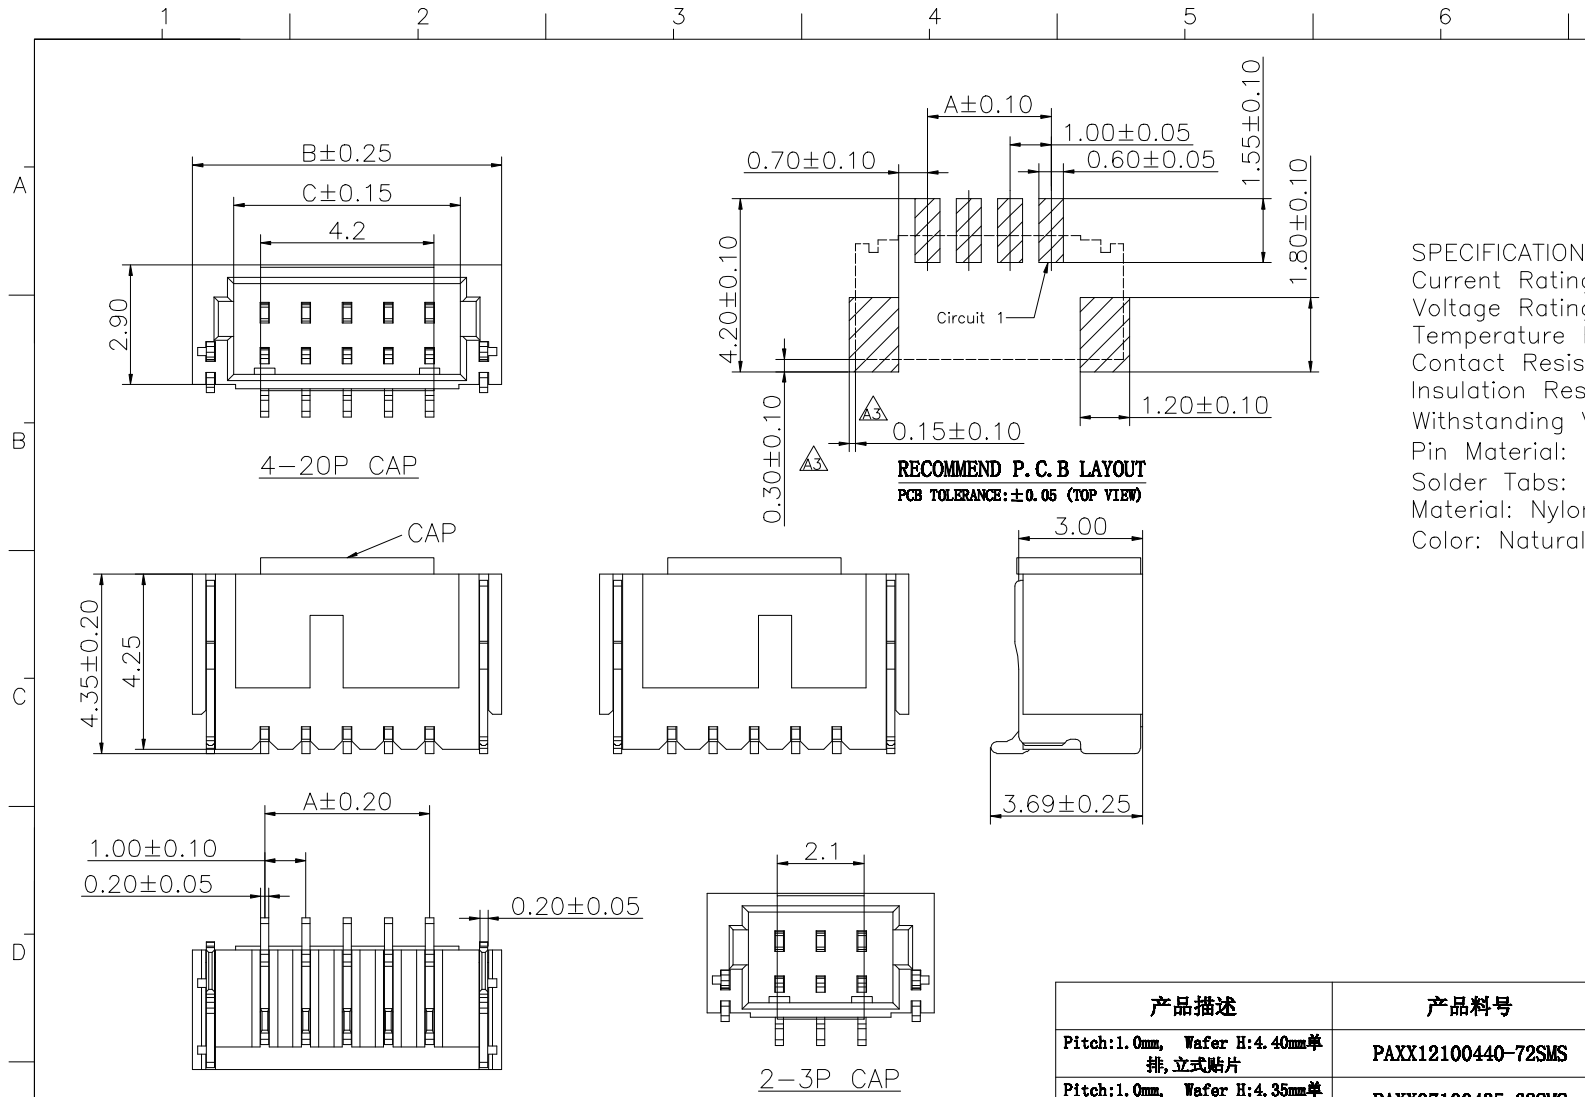

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

Ordering Information

P A XX 12 100 440- 72 S M S

P:Pin Header Series
A:Finished Product
No.of PINS
Plating Number
100:Pitch 1.00mm
440:Height 4.40mm

S:SMT TYPE
D:DIP TYPE
M:Male(排针)
F:Female(排母)
S:Single(单排)
D:Double(双排)
Running number

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [D-CHAIN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)